

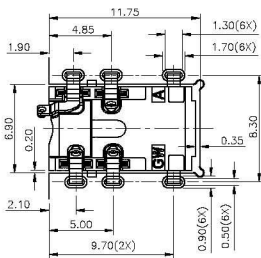




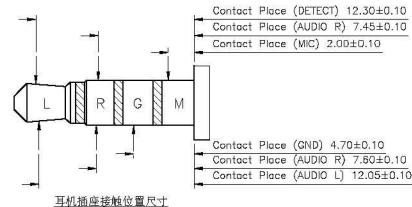
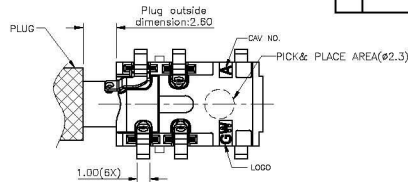



1

2

3

4

SCHEMATIC
RECOMMENDED

技术要求:

- 1.1: 额定电流: 1A
- 1.1: 接触阻抗: 50mΩ以下;
- 1.2: 绝缘阻抗: 100MΩ以上;
- 1.3: 耐电压: 500V AC以上;
- 1.4: 耐插拔: 6,000次以上;
- 1.5: 插入力: 1.5kgf (15N);
- 1.6: 拔出力:

寿命测试前: 0.7~1.5kgf (7~15N).
寿命测试后: 0.3~1.5kgf (3~15N).

2. 电镀信息:

- 2.1: 电镀厂商: 常润, 电镀线体: 3/4线;
- 2.2: 封孔剂型号及浓度: NP1208/2-5%;
- 2.3: 封孔后是否超声波清洗: 未超声波清洗用水洗;

3. 产品符合RoHS环保标准要求.

RECOMMENDED PCB LAYOUT
TOP VIEW T=0.50mm,TOL:±0.05

ITEM	PART NAME	Q'TY	MATERIAL	DESCRIPTION
07	HOUSING	1 PCS	HIGH TEMPERATURE PLASTIC	BLACK COLOR,UL94V-0
06	CONTACT B	1 PCS	PHOSPHOR BRONZE, T=0.20mm	CONTACT:2u" Au/SOLDER:1u" Au
05	CONTACT D	1 PCS	STAINLESS STEEL, T=0.20mm	CONTACT:2u" Au/SOLDER:1u" Au
04	CONTACT E	1 PCS	STAINLESS STEEL, T=0.20mm	CONTACT:2u" Au/SOLDER:1u" Au
03	CONTACT B	1 PCS	PHOSPHOR BRONZE, T=0.20mm	CONTACT:2u" Au/SOLDER:1u" Au
02	CONTACT B	1 PCS	PHOSPHOR BRONZE, T=0.20mm	CONTACT:2u" Au/SOLDER:1u" Au
01	CONTACT A	1 PCS	PHOSPHOR BRONZE, T=0.20mm	CONTACT:2u" Au/SOLDER:1u" Au



Unless Otherwise specified, Tolerance:
X. ±0.30
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
ANGLES ±3°

G-Switch Electronic Technology CO.,Ltd.

DESIGN: 何志杰	DATE: 2016.09.05	TITLE:
CHECKED:	DATE:	PHONE JACK
APPROVED:	DATE:	CUSTOMER DRAWING
PART NO. PJ-039T00-062-182	REV: A0	SCALE: 3:1 UNIT: mm
DRAWING NO. C-PJ039T00-01	SIZE: A4	SHEET: 1/1