





Contact Place (AUDIO L) 12.05±0.10
Contact Place (AUDIO R) 7.60±0.10
Contact Place (GND) 4.70±0.10

Contact Place (MIC) 2.00±0.10
Contact Place (AUDIO R) 7.45±0.10
Contact Place (DETECT) 12.30±0.10


耳机插座接触位置尺寸



RECOMMENDED PCB LAYOUT (TOP VIEW)
T=0.64mm, TOL:±0.05

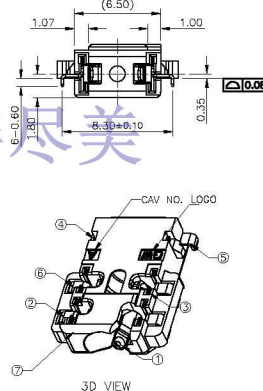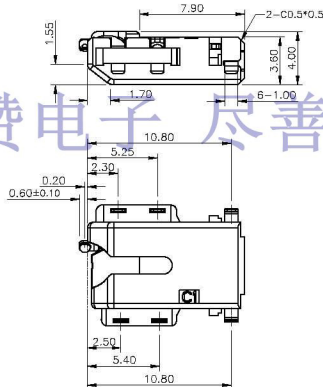

3D VIEW



SCHEMATIC
RECOMMENDED

技术要求:

- 产品性能:
 - 1.1 额定电流: 1A;
 - 1.2 接触阻抗: 50mΩ以下;
 - 1.3 绝缘阻抗: 100MΩ以上;
 - 1.4 耐电压: 500V AC以上;
 - 1.5 耐插拔: 6,000次以上;
 - 1.6 插入力: 1.5kgf (15N);
 - 1.7 拔出力:
 - 寿命测试前: 0.7~1.5kgf (7~15N);
 - 寿命测试后: 0.3~1.5kgf (3~15N)。
- 电镀信息:
 - 2.1 电镀厂商: 常州, 电镀线体: 3/4线;
 - 2.2 封孔剂型号及浓度: NF1208/2-5%;
 - 2.3 封孔后是否超声波清洗: 未超声波清洗用水洗;
- 产品符合RoHS环保标准要求。

7	HOUSING	1 PCS	HIGH TEMPERATURE PLASTIC	BLACK, UL94V-0
8	CONTACT B	1 PCS	PHOSPHOR BRONZE, T=0.20mm	CONTACT: 2u" Au, SOLDER: 1u" Au
5	CONTACT D	1 PCS	STAINLESS STEEL, T=0.20mm	CONTACT: 2u" Au, SOLDER: 1u" Au
4	CONTACT E	1 PCS	STAINLESS STEEL, T=0.20mm	CONTACT: 2u" Au, SOLDER: 1u" Au
3	CONTACT B	1 PCS	PHOSPHOR BRONZE, T=0.20mm	CONTACT: 2u" Au, SOLDER: 1u" Au
2	CONTACT B	1 PCS	PHOSPHOR BRONZE, T=0.20mm	CONTACT: 2u" Au, SOLDER: 1u" Au
1	CONTACT A	1 PCS	PHOSPHOR BRONZE, T=0.20mm	CONTACT: 2u" Au, SOLDER: 1u" Au

ITEM	PART NAME	Q'TY	MATERIAL	DESCRIPTION
------	-----------	------	----------	-------------

		G-Switch Electronic Technology CO., Ltd.	
Unless Otherwise specified, Tolerance: X. ±0.30 X.x ±0.20 X.xx ±0.15 X.xxx ±0.10 ANGLES ±3°	DESIGN: 张调旺	DATE: 2016.10.10	TITLE:
	CHECKED:	DATE:	PHONE JACK
	APPROVED:	DATE:	CUSTOMER DRAWING
	PART NO.: PJ-0308T00-082-1B2	REV: A0	SCALE: 3:1 UNIT: mm
DRAWING NO.: C-PJ0308T00-01		SHEET: 1/1	