



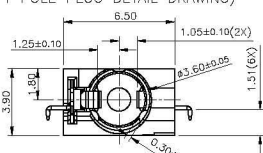
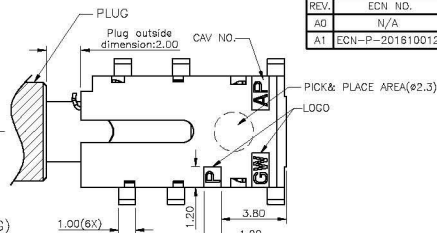




(Ø3.50mm 4 POLE PLUG DETAIL DRAWING)

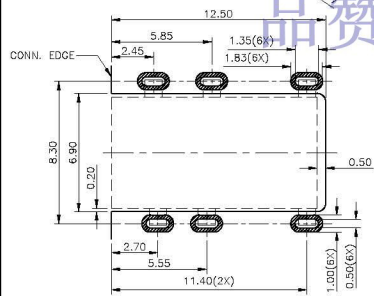

3D VIEW



RECOMMENDED PCB LAYOUT (COMPONENT SIDE)
T=0.60mm. TOL:±0.05



NOTES:

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 6,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 15.0N (1.50KgFMax);
7. CONNECTOR UNMATING FORCES:
TEST BEFORE: 7.0~15.0N (0.70~1.50KgF);
TEST AFTER: 3.0~15.0N (0.30~1.50KgF);



01	CONTACT A	1	PCS	PHOSPHOR BRONZE, T=0.20mm	CONTACT-2u Au/SOLDER-1u1uAu
02	CONTACT B	1	PCS	PHOSPHOR BRONZE, T=0.20mm	CONTACT-2u Au/SOLDER-1u1uAu
03	CONTACT B	1	PCS	PHOSPHOR BRONZE, T=0.20mm	CONTACT-2u Au/SOLDER-1u1uAu
04	CONTACT B	1	PCS	PHOSPHOR BRONZE, T=0.20mm	CONTACT-2u Au/SOLDER-1u1uAu
05	CONTACT D	1	PCS	STAINLESS STEEL, T=0.35mm	CONTACT-2u Au/SOLDER-1u1uAu
06	CONTACT E	1	PCS	STAINLESS STEEL, T=0.35mm	CONTACT-2u Au/SOLDER-1u1uAu
07	HOUSING	1	PCS	HIGH TEMPERATURE PLASTIC	BLACK COLOR,DL94V-0
ITEM	PART NAME	Q'TY		MATERIAL	DESCRIPTION

 百智科技 b-Switch		G-Switch Electronic Technology CO.,Ltd.						
Unless otherwise specified, Tolerance: X: ±0.30 X ₂₀ : ±0.20 X ₃₀ : ±0.15 X ₄₀ : ±0.10 Angles: ±3°	DESIGN	梁碧雯	DATE	2016.10.26	TITLE:	BEVEL PHONE JACK CUSTOMER DRAWING		
	CHECKED		DATE					
	APPROVED		DATE					
	PART NO. PJ-0300T1P-062-182				REV: A1	SCALE: 1/1	UNIT: mm	
	DRAWING NO. C-PJ0300T1P-00				SIZE: A4	SHEET: 1/1		