




REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE
AD	N/A		INITIAL RELEASE	2015.09.29
A1	ECN-P-201610012		整理圖面	2016.10.26
				梁若彪





(ø3.50mm 4 POLE PLUG DETAIL DRAWING)

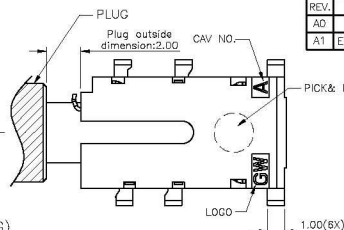



PICK & PLACE AREA(ø2.3)

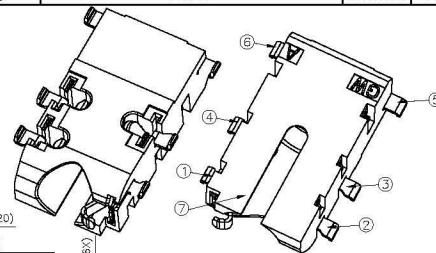

3D VIEW

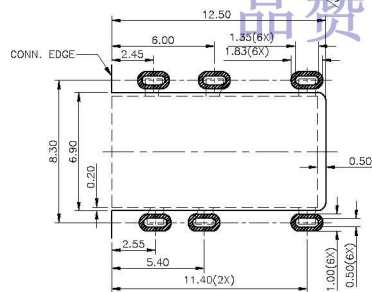

RECOMMENDED PCB LAYOUT (COMPONENT SIDE)
T=0.60mm, TOL:±0.05

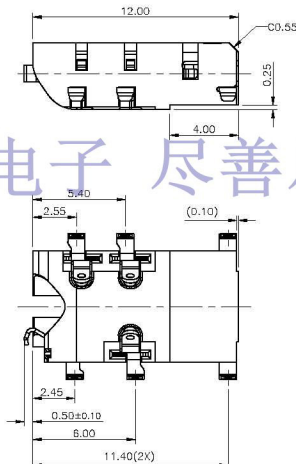

SCHEMATIC
RECOMMENDED

NOTES:

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 6,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 15.0N (1.50Kg/Matx);
7. CONNECTOR UNMATING FORCES:
TEST BEFORE: 7.0~15.0N (0.70~1.50kgf);
TEST AFTER: 3.0~15.0N (0.30~1.50kgf);



01	CONTACT A	1	PCS	PHOSPHOR BRONZE, T=0.20mm	CONTACT:2u" Au/SOLDER:1u" Au
02	CONTACT B	1	PCS	PHOSPHOR BRONZE, T=0.20mm	CONTACT:2u" Au/SOLDER:1u" Au
03	CONTACT B	1	PCS	PHOSPHOR BRONZE, T=0.20mm	CONTACT:2u" Au/SOLDER:1u" Au
04	CONTACT B	1	PCS	PHOSPHOR BRONZE, T=0.20mm	CONTACT:2u" Au/SOLDER:1u" Au
05	CONTACT D	1	PCS	STAINLESS STEEL, T=0.20mm	CONTACT:2u" Au/SOLDER:1u" Au
06	CONTACT E	1	PCS	STAINLESS STEEL, T=0.20mm	CONTACT:2u" Au/SOLDER:1u" Au
07	HOUSING	1	PCS	HIGH TEMPERATURE PLASTIC	BLACK COLOR,UL94V-0
ITEM	PART NAME	Q'TY	MATERIAL	DESCRIPTION	

b-Switch

Unless otherwise specified, Tolerance:
±0.30
±0.20
±0.15
±0.10
±0.05
Angles

G-Switch Electronic Technology CO.,Ltd.

DESIGN	梁若彪	DATE	2016.10.26	TITLE:	BEVEL PHONE JACK CUSTOMER DRAWING
CHECKED		DATE			
APPROVED		DATE			
PART NO.	PJ-0300T00-062-182	REV.	A1	SCALE:	1:1
DRAWING NO.	C-PJ0300T00-00	SHEET:	1/1	UNIT:	mm