









(Ø3.50mm 4 POLE PLUG DETAIL DRAWING)



RECOMMENDED PCB LAYOUT
TOP VIEW TOL:±0.05



SCHEMATIC



3D VIEW

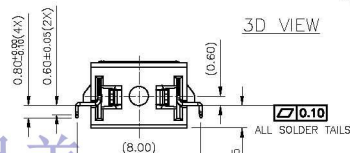


TABLE B:

ITEM	PART NUMBER	DESCRIPTION
01	PJ-0279D00-061-182	有卤
02	PJ-0279D00-061-182H	无卤

NOTES:

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.
6. CONNECTOR MATING FORCES: 2.94~29.4N (0.30~3.00Kg_f).
7. CONNECTOR UNMATING FORCES: 2.94~29.4N (0.30~3.00Kg_f).
8. PRODUCT MEET THE REQUEST OF the RoHS (SEE TABLE A).

TABLE A:

MATTER	RoHs (PPM)
Cd	≤ 100
Pb	≤ 1000
Hg	≤ 1000
Cr6+	≤ 1000
PBB	≤ 1000
PBDE	≤ 1000



01	CONTACT A	1 PCS	STAINLESS STEEL T=0.20mm	1u" Au ALL OVER
02	CONTACT B	1 PCS	PHOSPHOR BRONZE T=0.20mm	1u" Au ALL OVER
03	CONTACT C	1 PCS	PHOSPHOR BRONZE T=0.20mm	1u" Au ALL OVER
04	CONTACT D	1 PCS	STAINLESS STEEL T=0.20mm	CONTACT-2u" Au/SOLDER:1u" Au
05	CONTACT E	1 PCS	STAINLESS STEEL T=0.20mm	CONTACT-2u" Au/SOLDER:1u" Au
06	HOUSING 1	1 PCS	HIGHT TEMPERATURE PLASTIC	BLACK COLOR:JUL94 V-0
ITEM	PART NAME	Q'TY	MATERIAL	DESCRIPTION



Unless otherwise specified, Tolerance:	
X.	±0.30
X.x	±0.20
X.xx	±0.15
X.xxx	±0.10
Angles	±3°

G-Switch Electronic Technology CO.,Ltd.

DESIGN 陈峰帆	DATE 2013.12.24	TITLE: PHONE JACK CUSTOMER DRAWING			
CHECKED	DATE				
APPROVED	DATE				
PART NO. SEE TABLE B		REV.: A1	SCALE: 3:1	UNIT: mm	
DRAWING NO. C-PJ0279D00-00		SIZE: A4	SHEET: 1/1		