

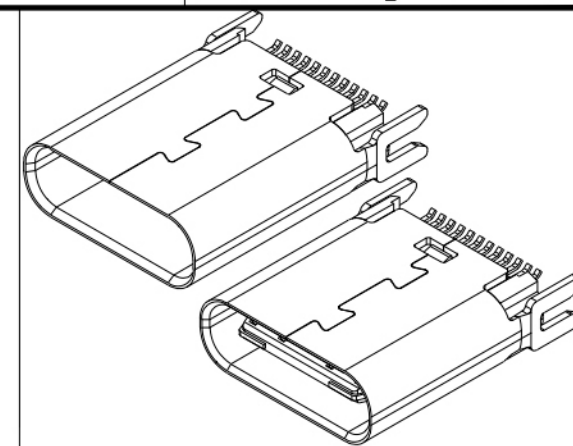
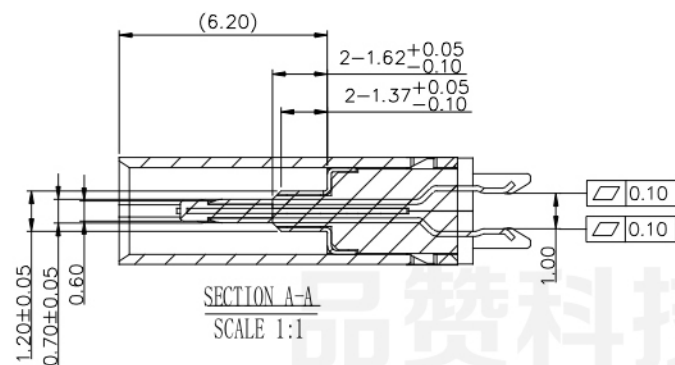
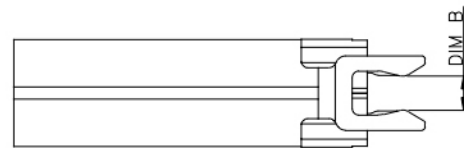
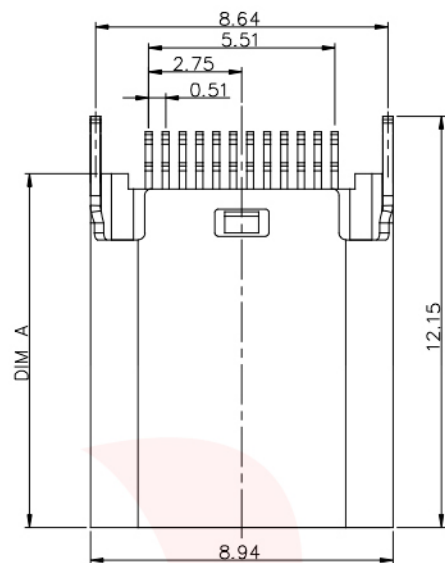
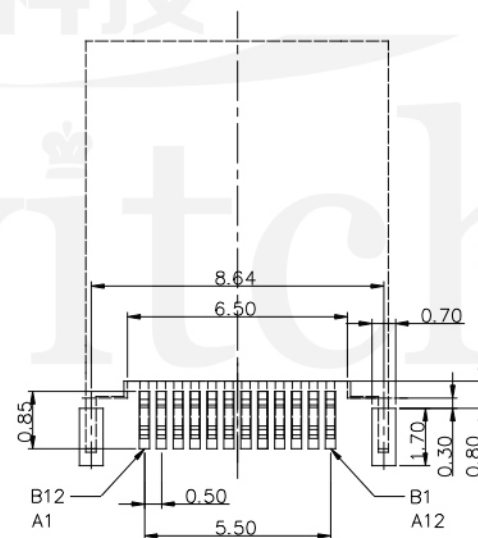


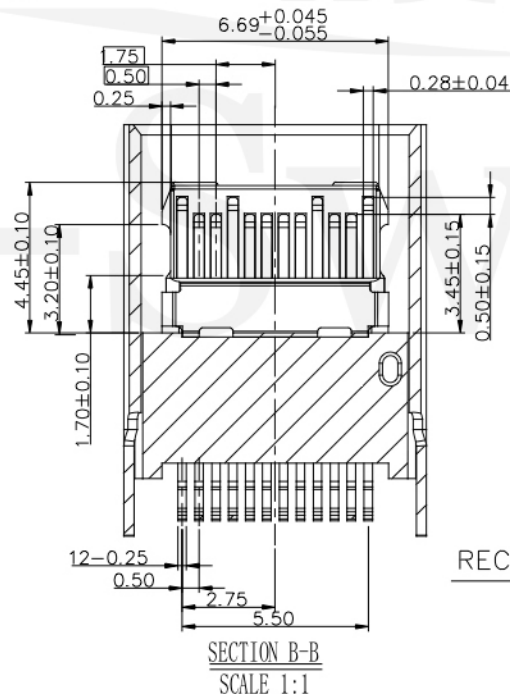

NO	DIM X1	DIM X2
A	10.5	0.8
B	9.3	1.0
C	10.5	1.0
D	9.3	0.8

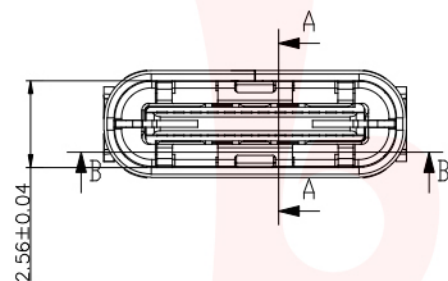


NOTES:

SPECIFICATION:

1. CURRENT RATING: 5A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES



		G-Switch Electronic Technology CO., Ltd.				
Unless otherwise specified, Tolerance: X. ±0.30 X.x ±0.20 X.xx ±0.15 X.xxx ±0.10 Angles ±3°	DESIGN	陈锋枫	DATE	2016.05.29		TITLE: GT-USB-7011X
			DATE			
	APPROVED		DATE			
	http://www.dg-switch.com			REV.: X1	SCALE: 4:1	UNIT: mm
	TEL:0769-82388879			SIZE: A4	SHEET: 1/1	

GT-USB-7011X