

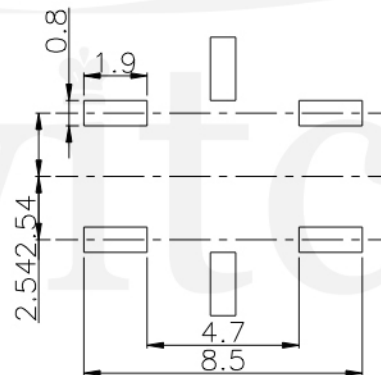


GT-LS604XXX-LX


Product Type 6x6	Switch lifetime (Force) L05=50,000 Cycles L1=100,000 Cycles
G-SWITCH Operating Force A=160gf B=250gf C=100gf	LED Color N=无 R=红色 Y=黄色 G=绿色 U=蓝色 W=白色 O=橙色 R/U=红发蓝 X/O=客制化
	键帽颜色 A=透明(PC) B=黑色(PA66) C=白色(POM) D=米黄色 (PA66)

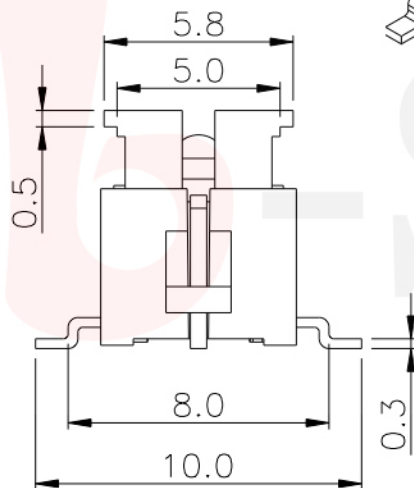

CIRCUIT

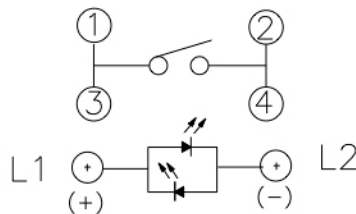

P.C.B LAYOUT



G-Switch Specification:

Operating temperature range : -30°C to +85°C
 Rating : 50mA, 12V DC
 Insulation resistance : 100MΩ min. 100V DC
 Dielectric strength : 250V AC for 1 min
 Contact resistance : 100m Ω max.
 Travel: 0.25±0.1mm

	G-Switch Electronic (HongKong) CO.,Ltd.		
	DESIGN FengFengChen	DATE 2019.05.29	Molde code:
Unless otherwise specified, Tolerance: X. ±0.30 X.x ±0.20 X.xx ±0.15 X.xxx ±0.10 Angles ±3°	CHECKED	DATE	GT-LS604XXX-LX
	APPROVED	DATE	
	http://www.dg-switch.com		REV.: X1
	TEL:0769-82388879	SCALE: 4:1	UNIT: mm
		SHEET: 1/1	