
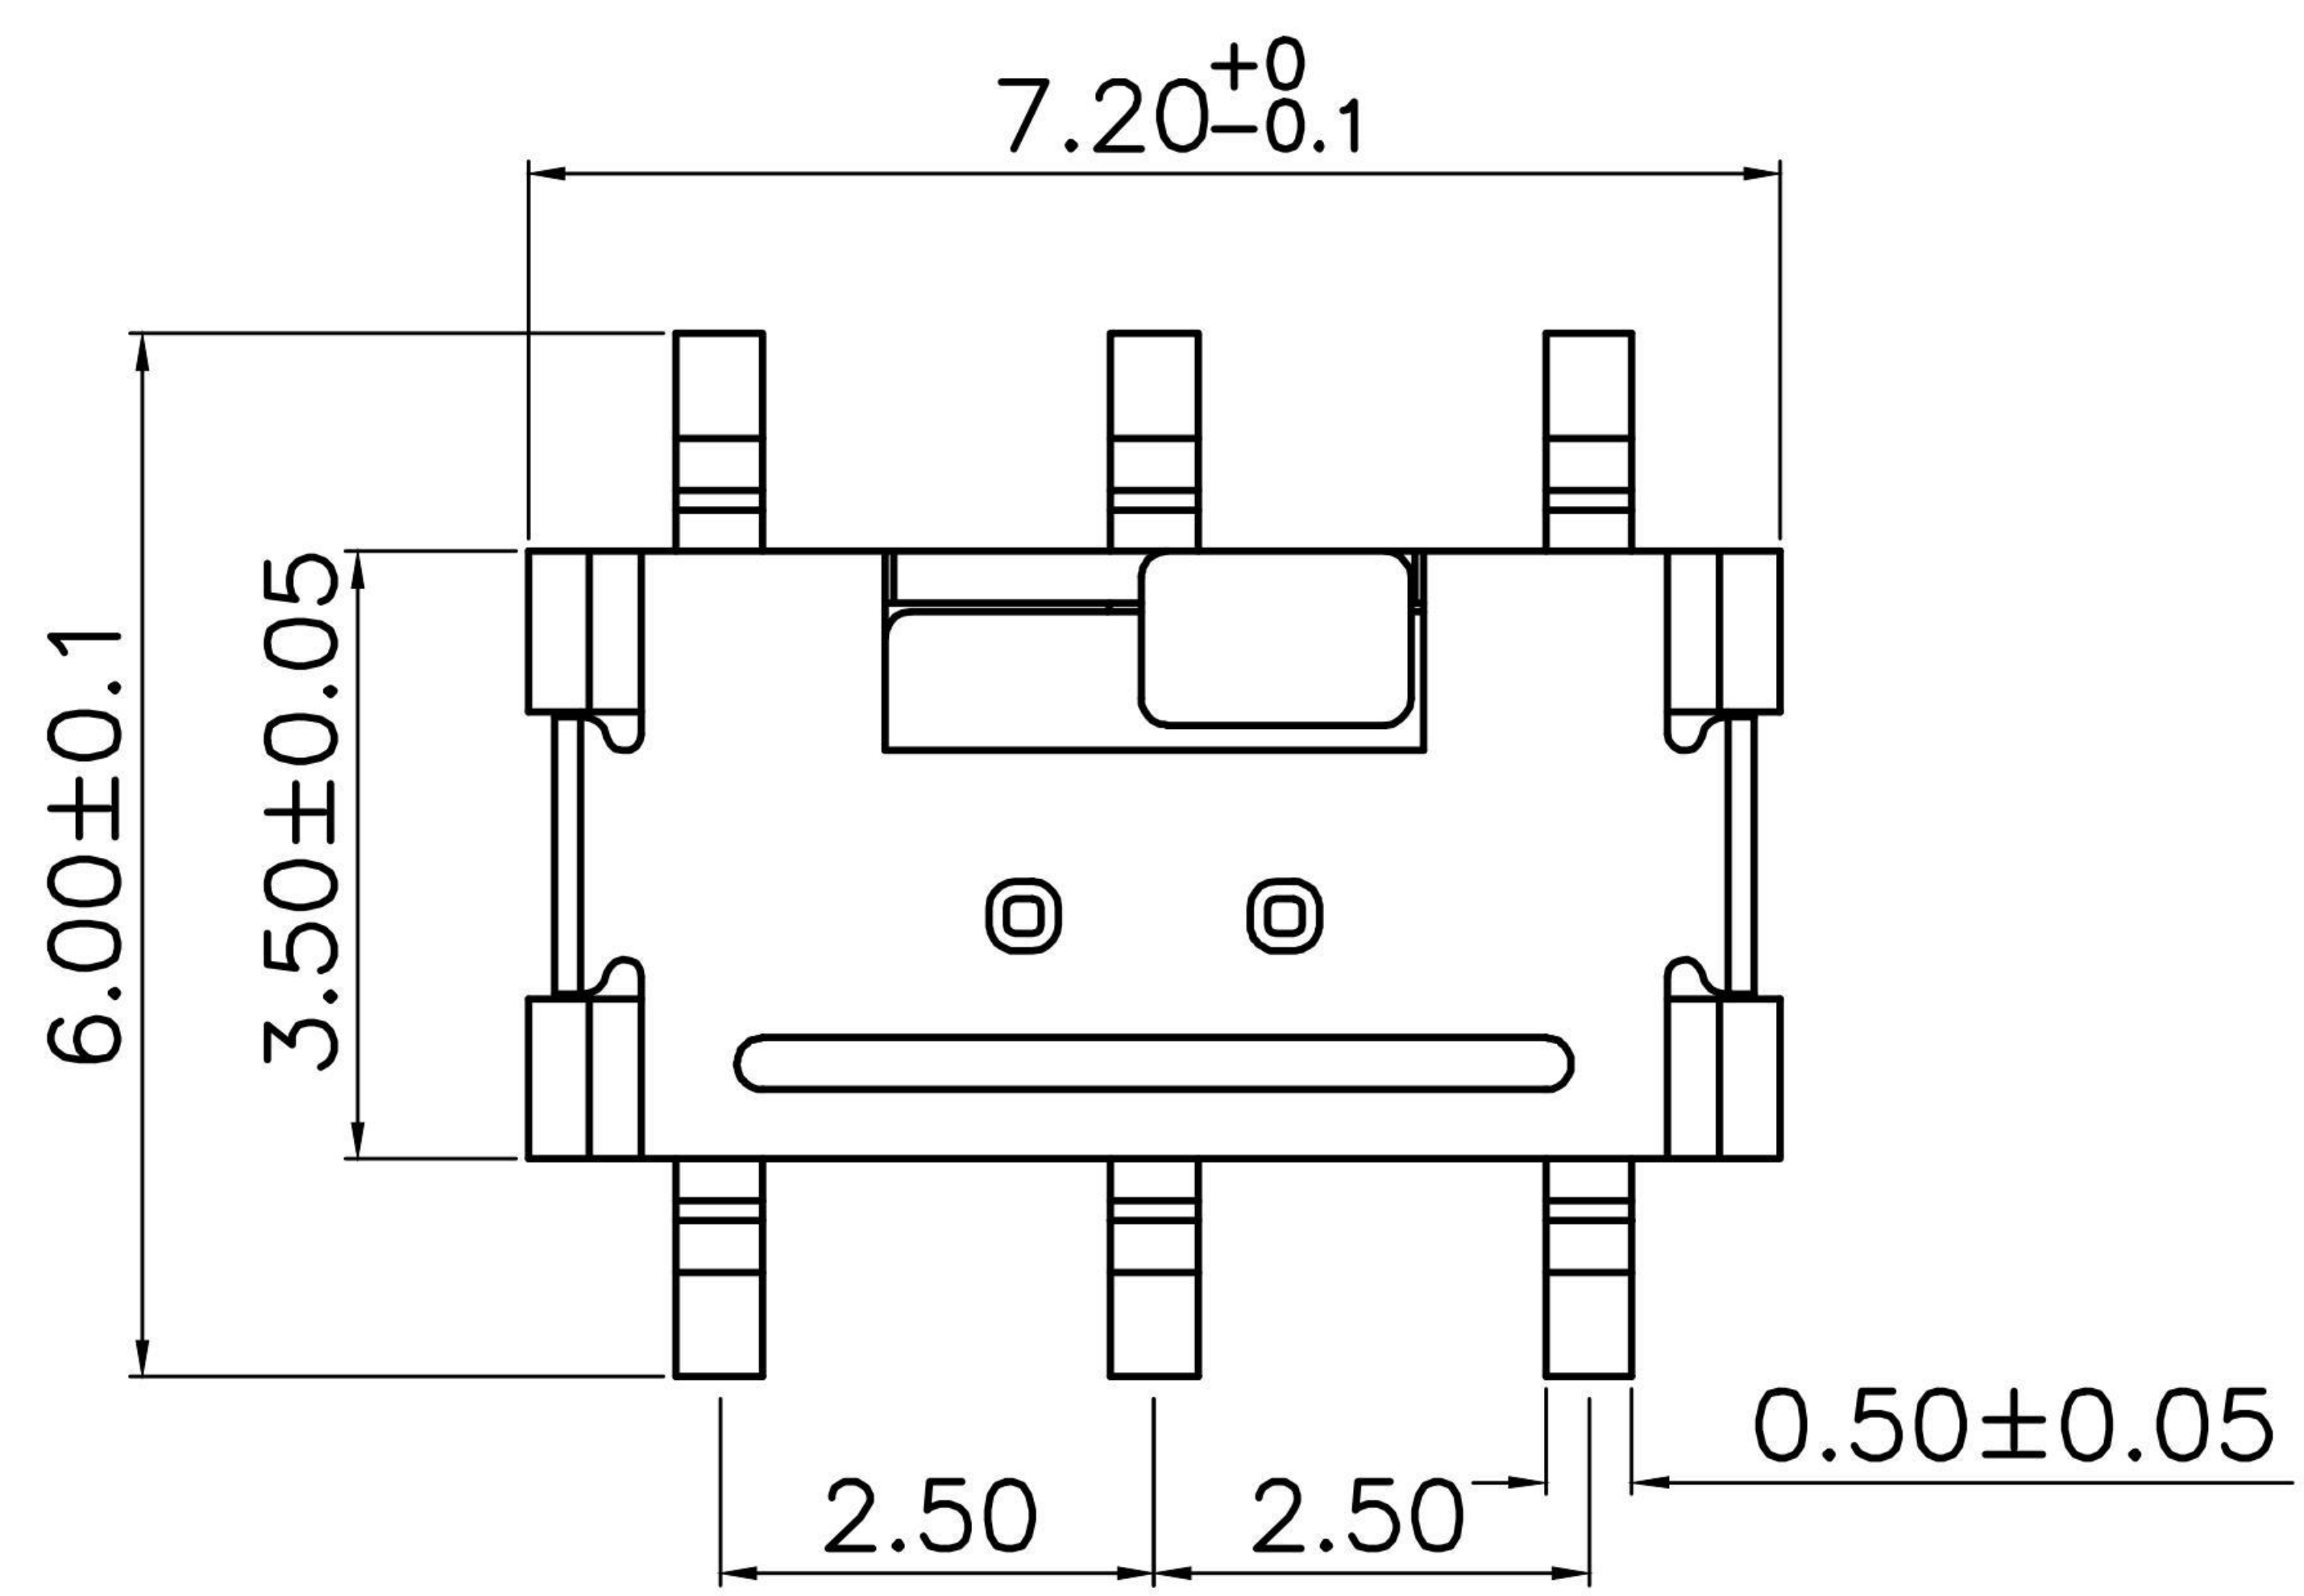


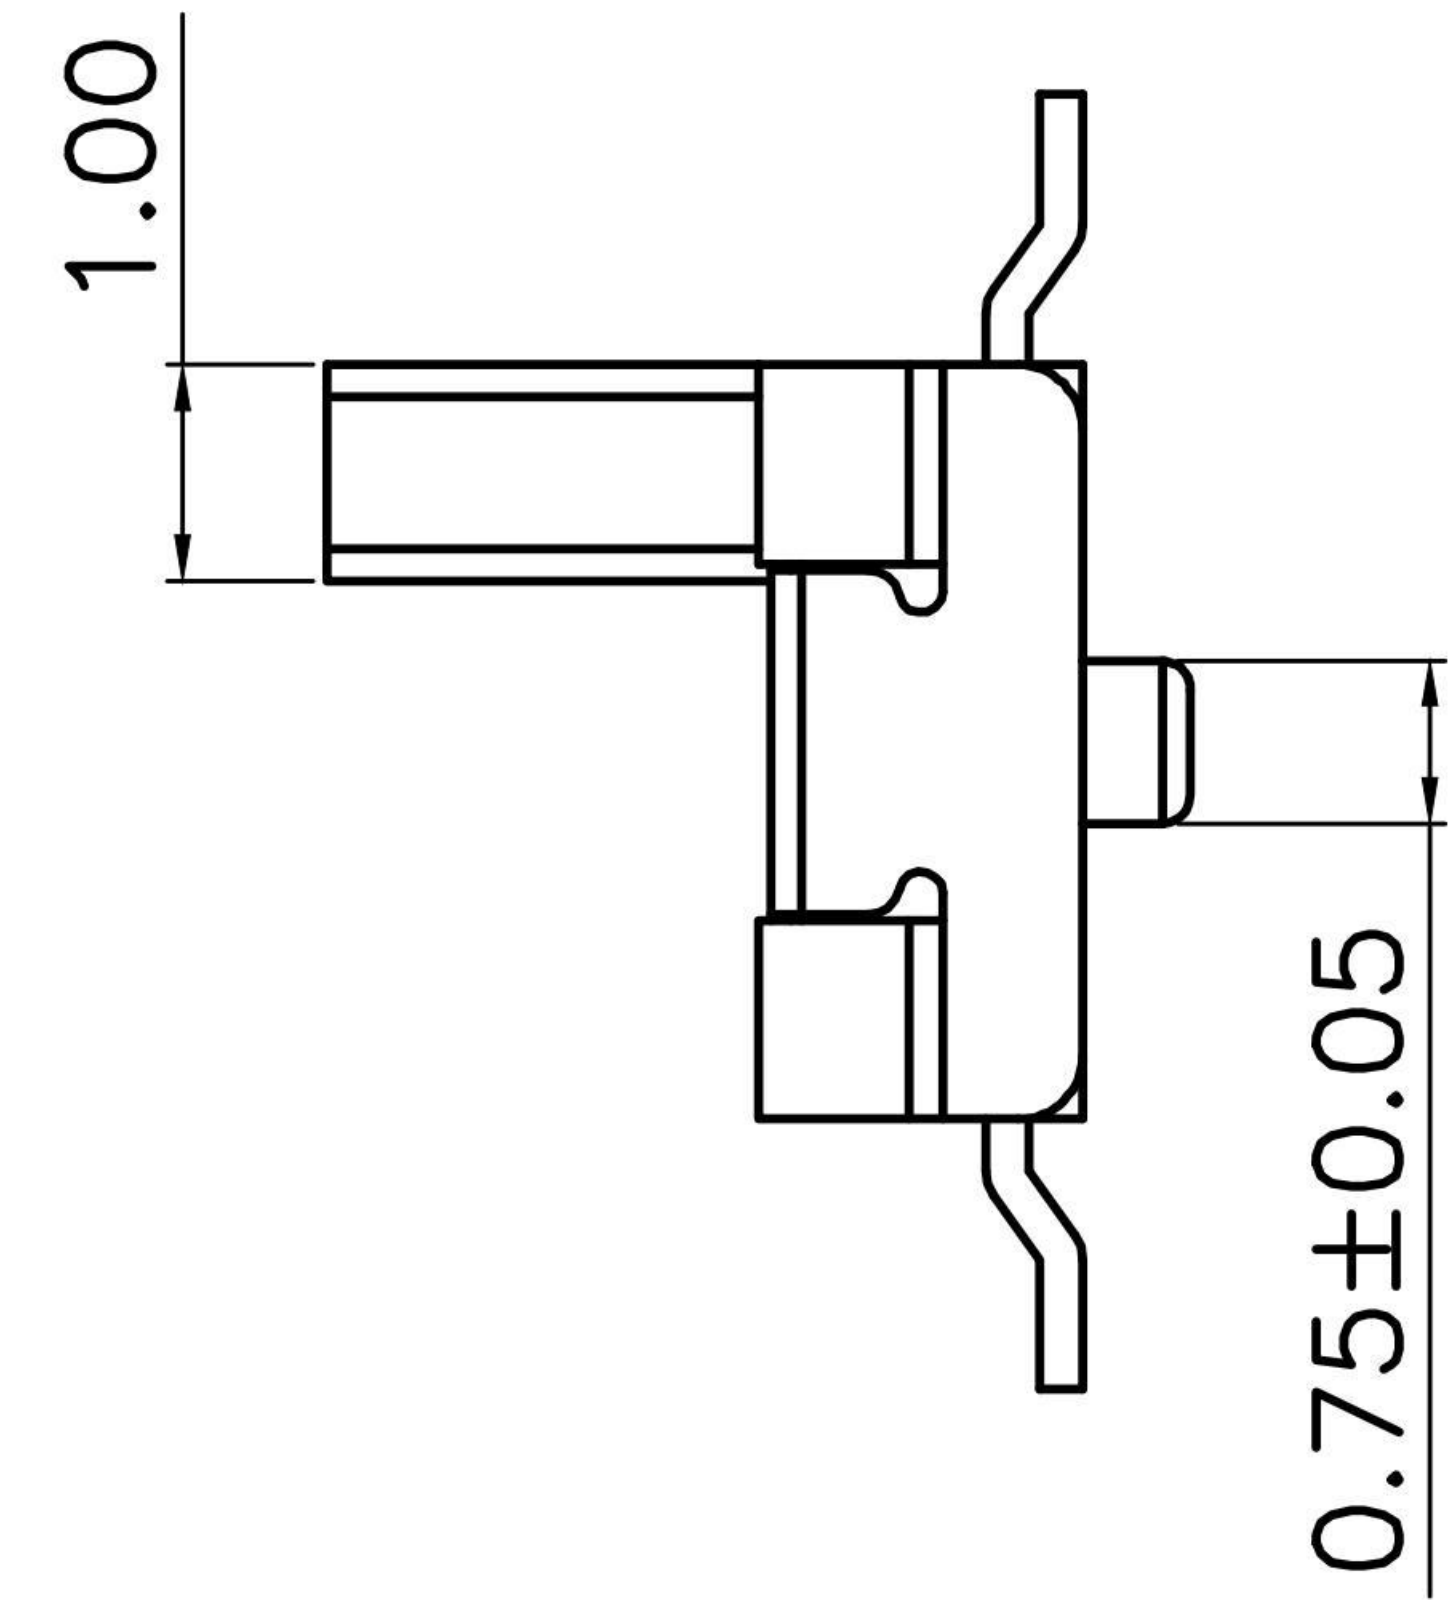


MS-22C01-GXXX


直拨形式

G-Switch P/N

Switch Height (mm)
G010=1.0
G015=1.5
G020=2.0

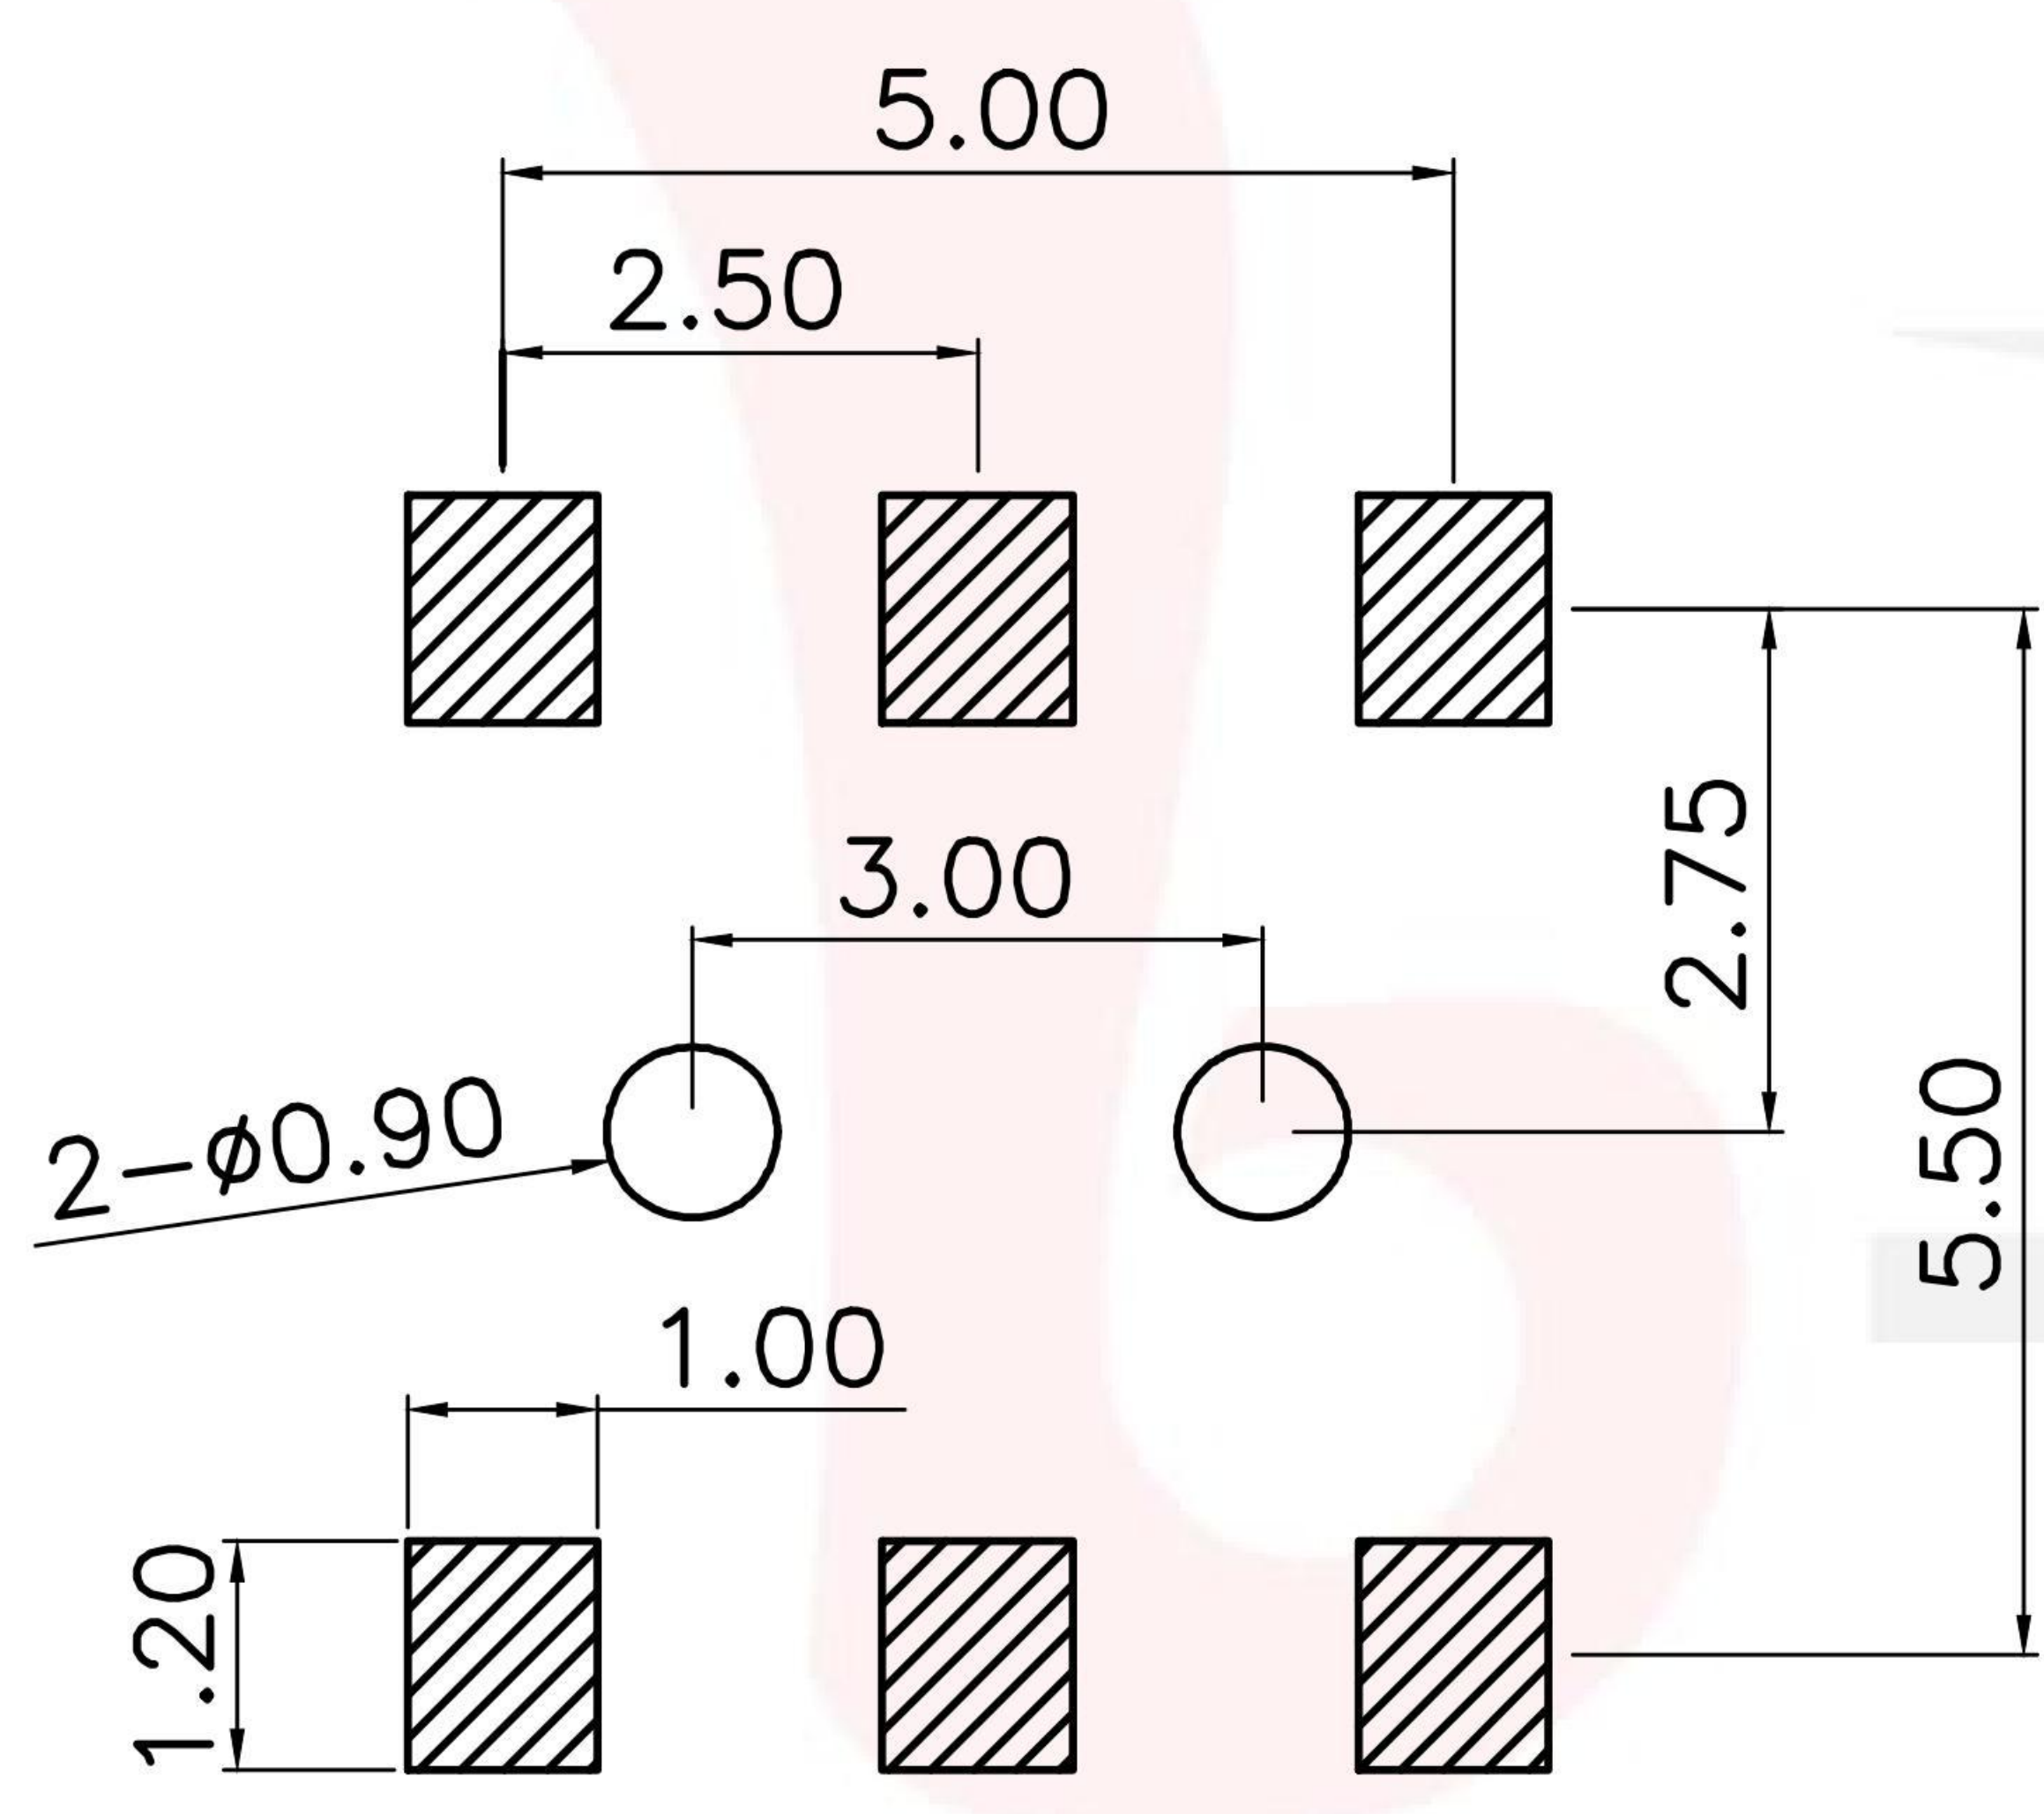


PCB PLERTING PLAN

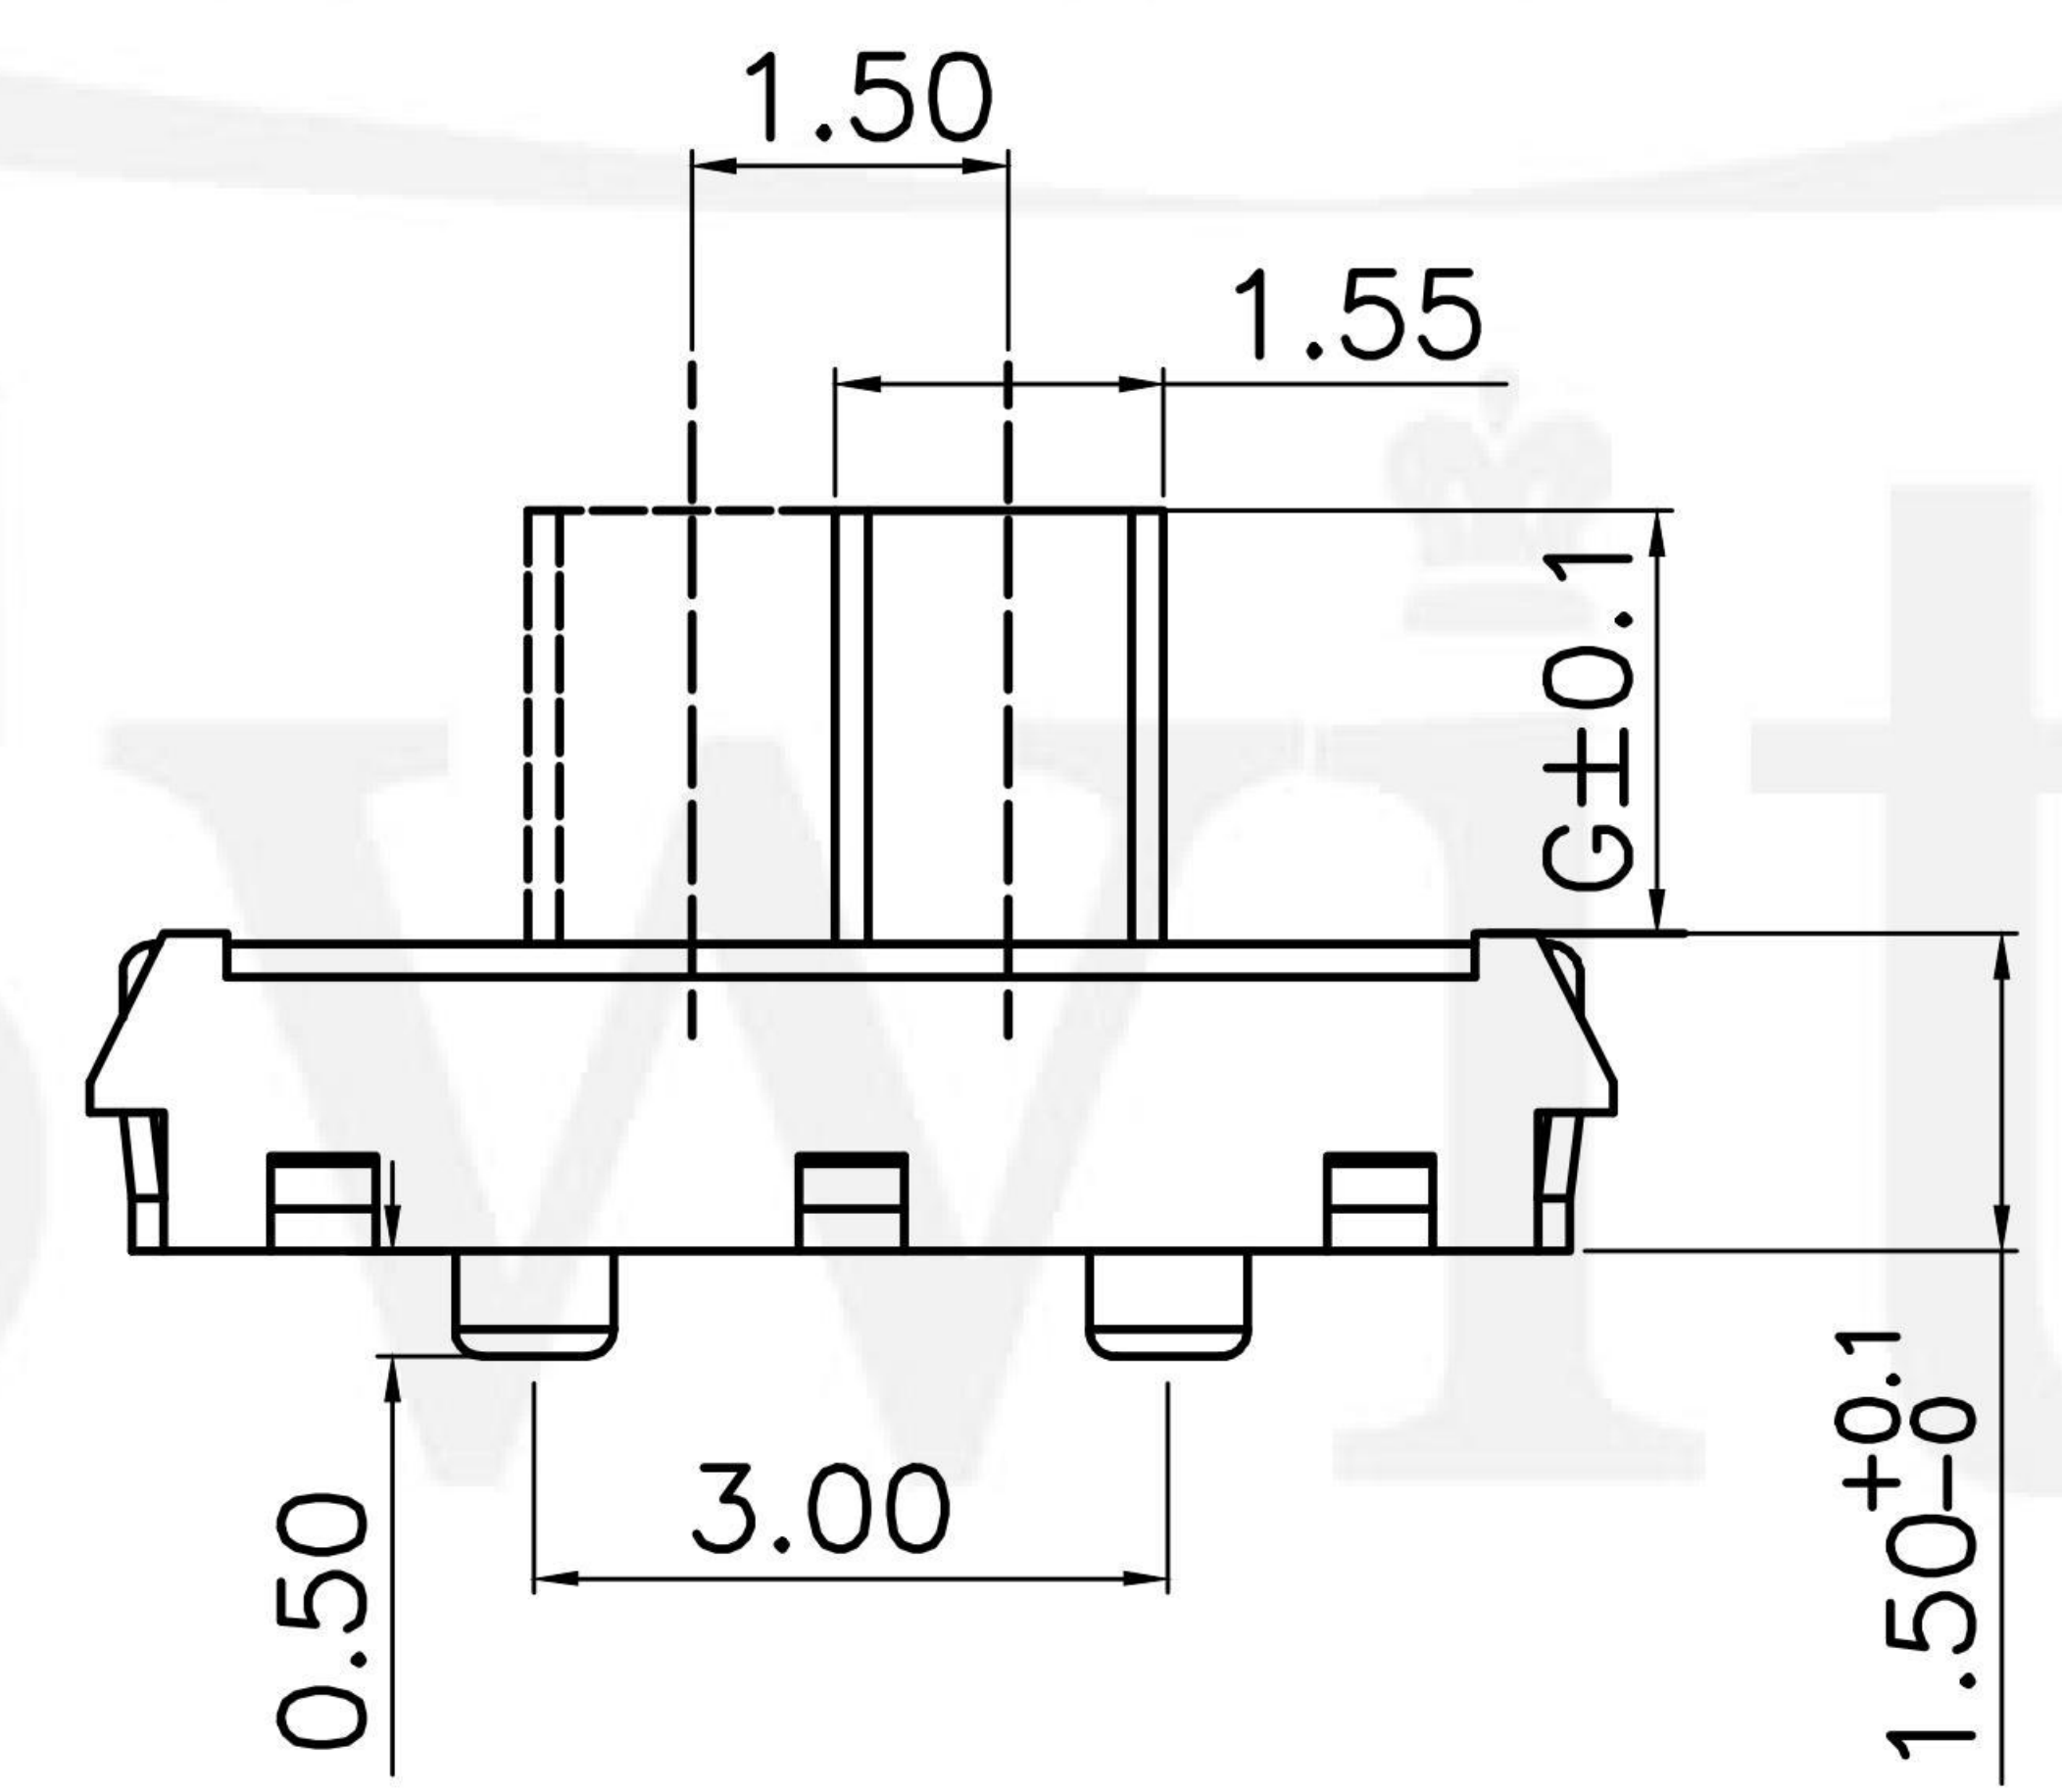

G-Switch Specification:

Electrical Specifications: DC 12V 0.5A DC 6V 1.0A
Contact Resistance : 100mΩMAX
Insulation Resistance: 100M ohm 100V DC
Withstand Voltage: AC 250V for 1 min
Ambient Temperature: -20°C~+70°C
Relative Humidity: (40°C)≤85%
Reflow soldering: 250°C MAX
Life: 10,000 times

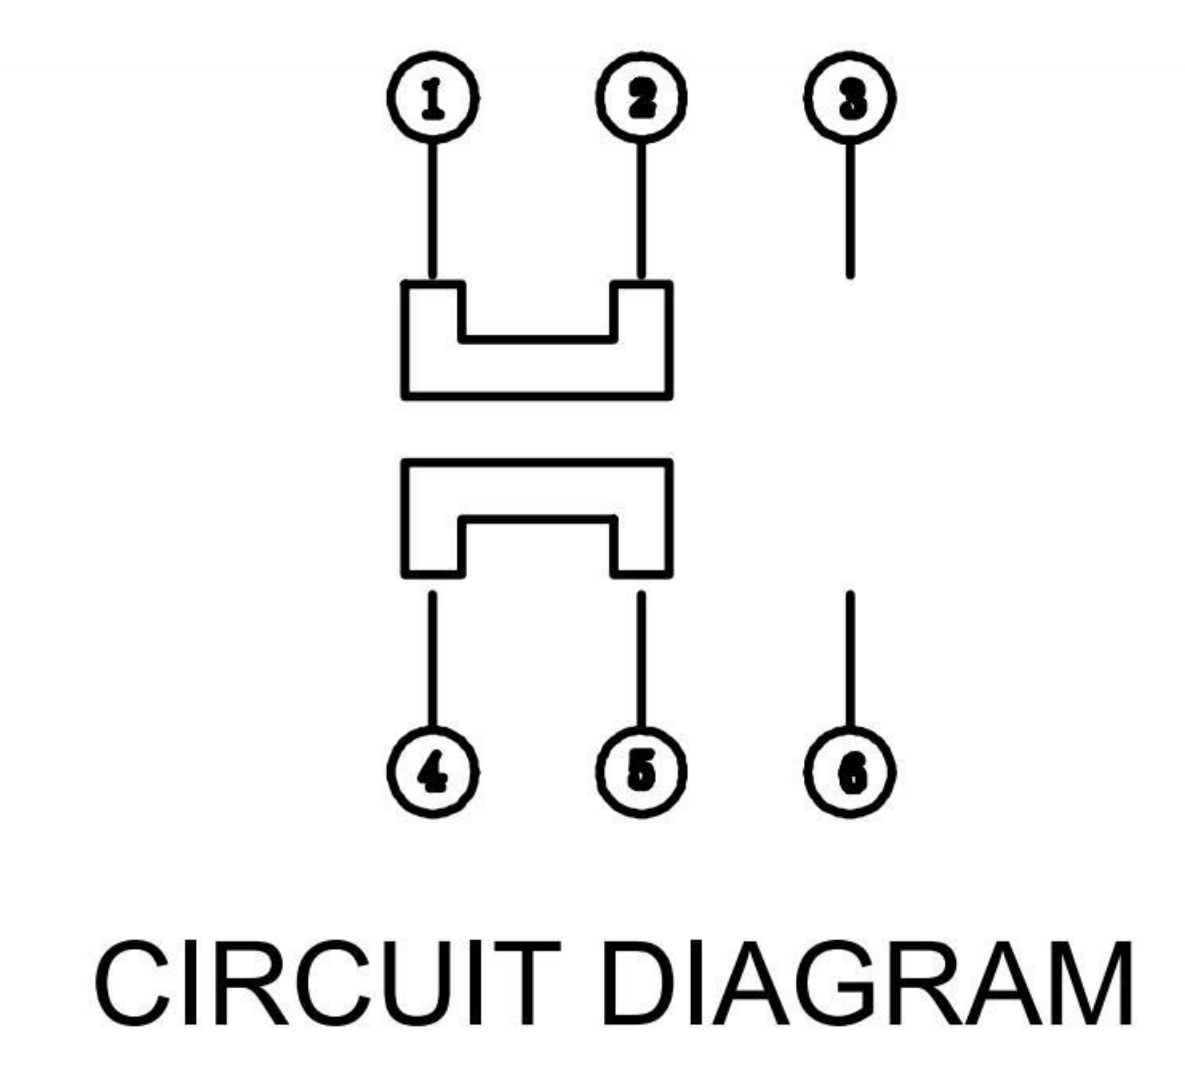

CIRCUIT DIAGRAM



		G-Switch Electronic (HongKong) CO.,Ltd.			
Unless otherwise specified, Tolerance: X. ±0.30 X.x ±0.20 X.xx ±0.15 X.xxx ±0.10 Angles ±3°		DESIGN FengFengChen	DATE 2019.05.29	Molde code:	
		CHECKED	DATE	MS-22C01-GXXX	
		APPROVED	DATE		
		http://www.dg-switch.com		REV.: X1	SCALE: 4:1
		TEL:0769-82388879		SIZE: A4	SHEET: 1/1