
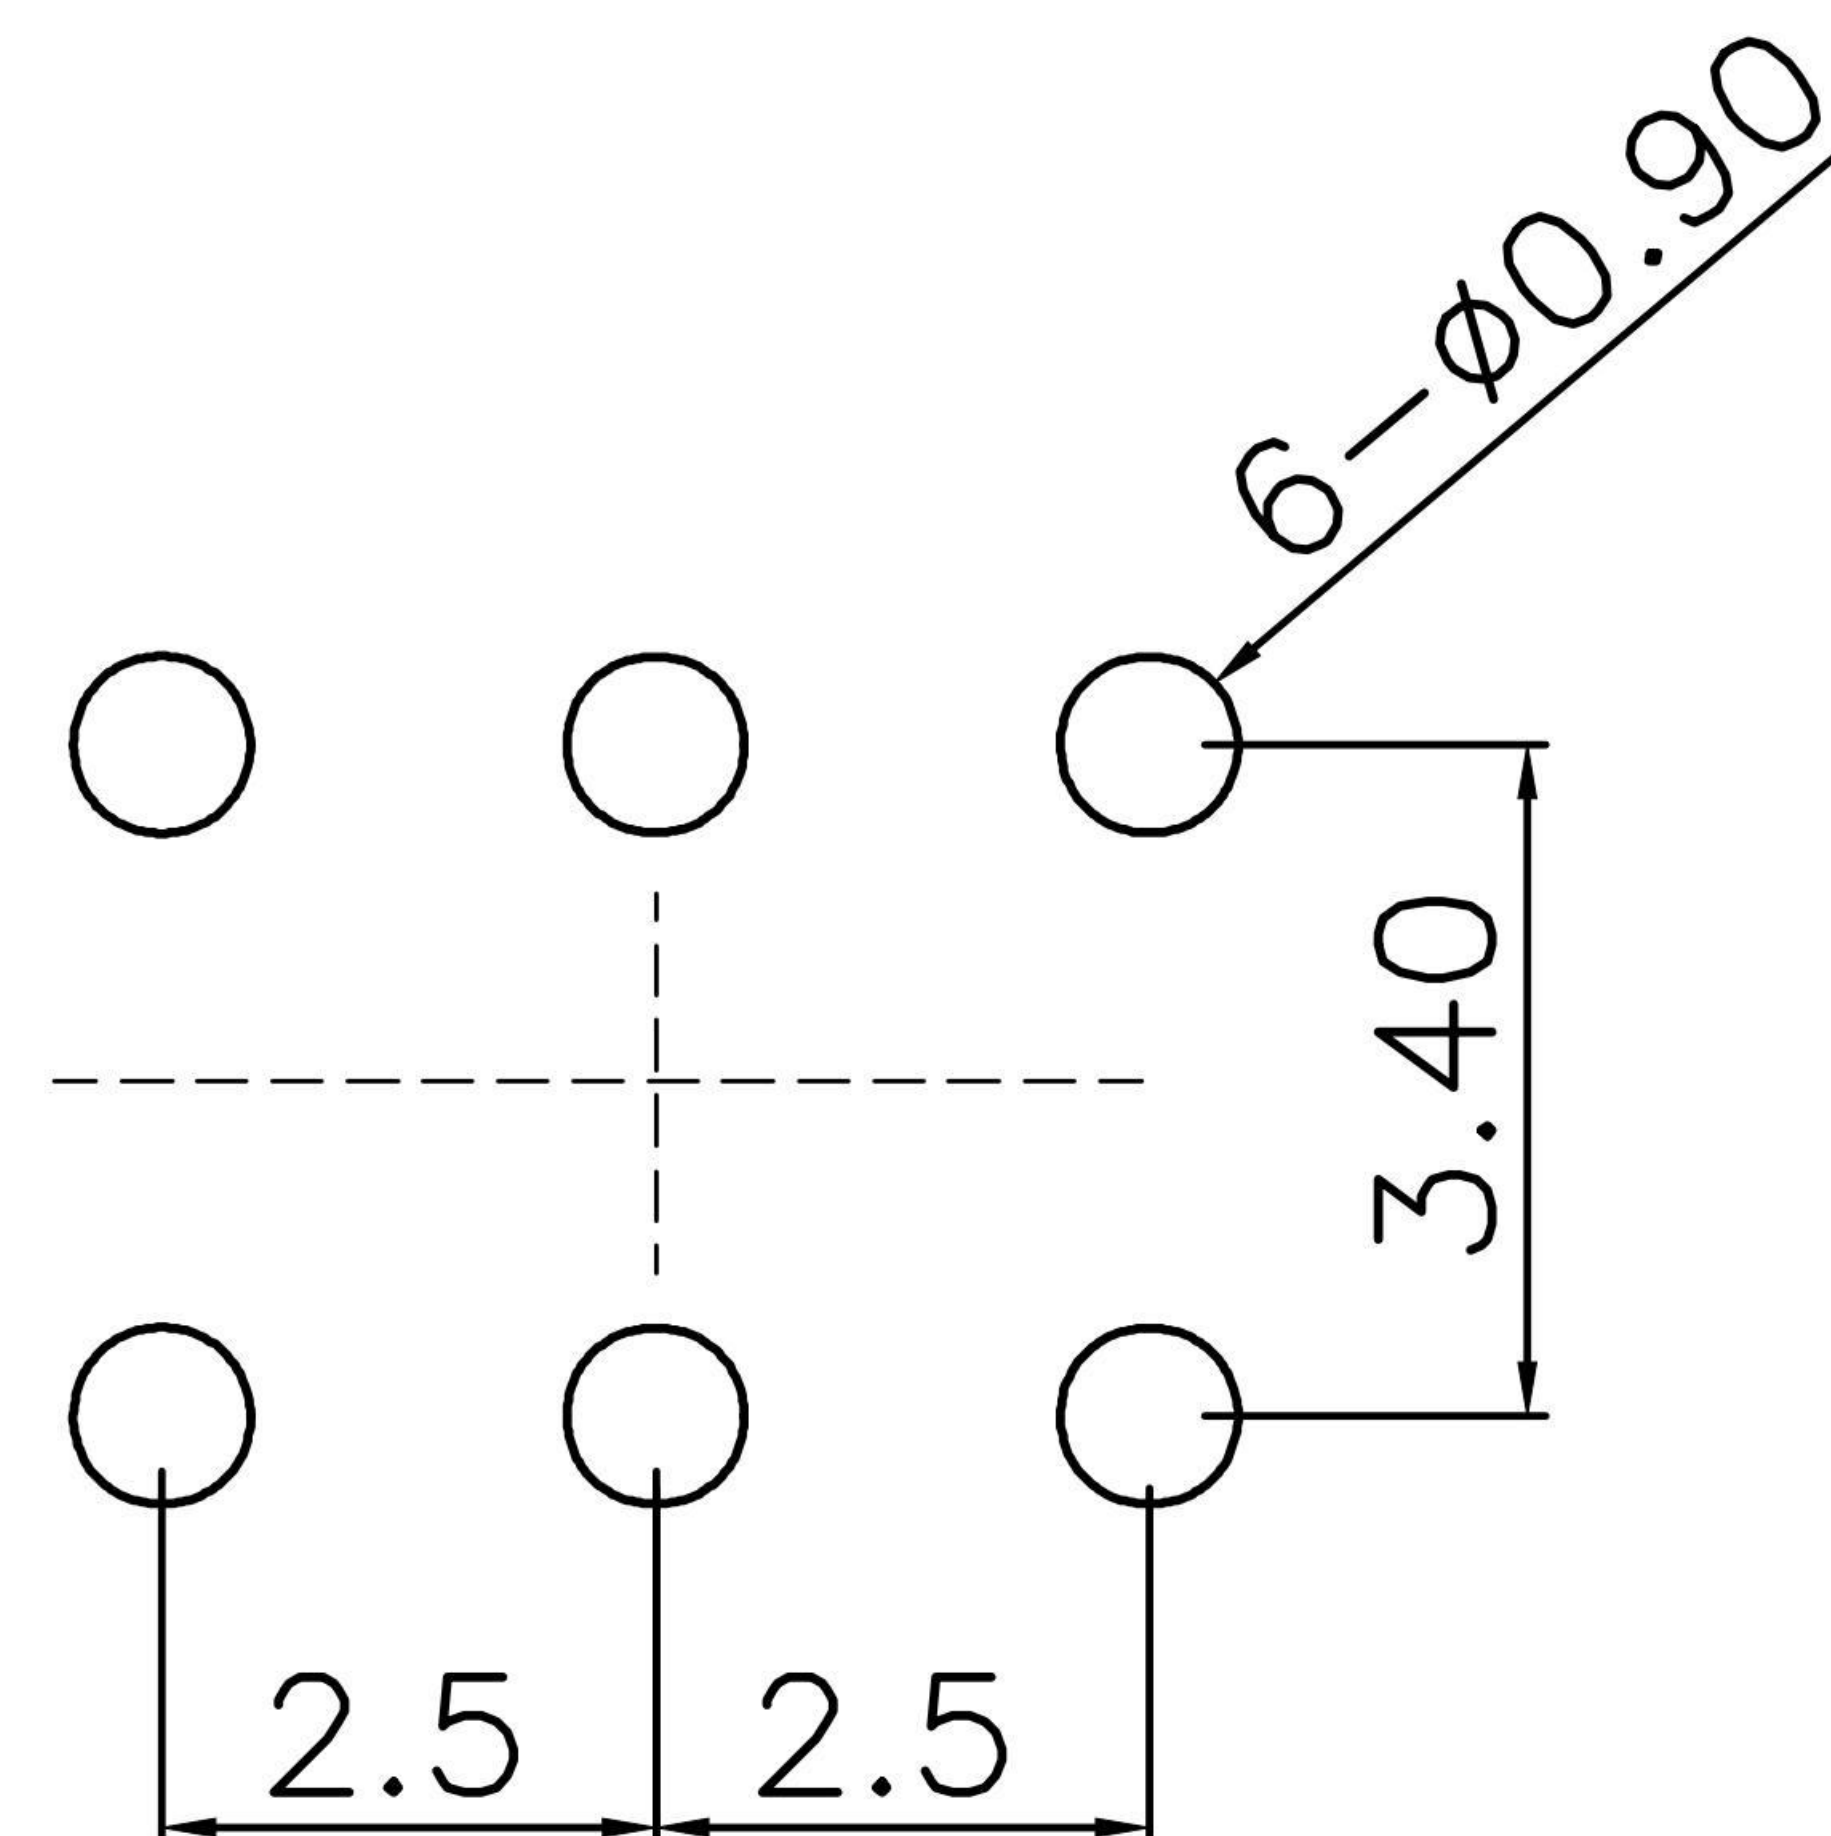


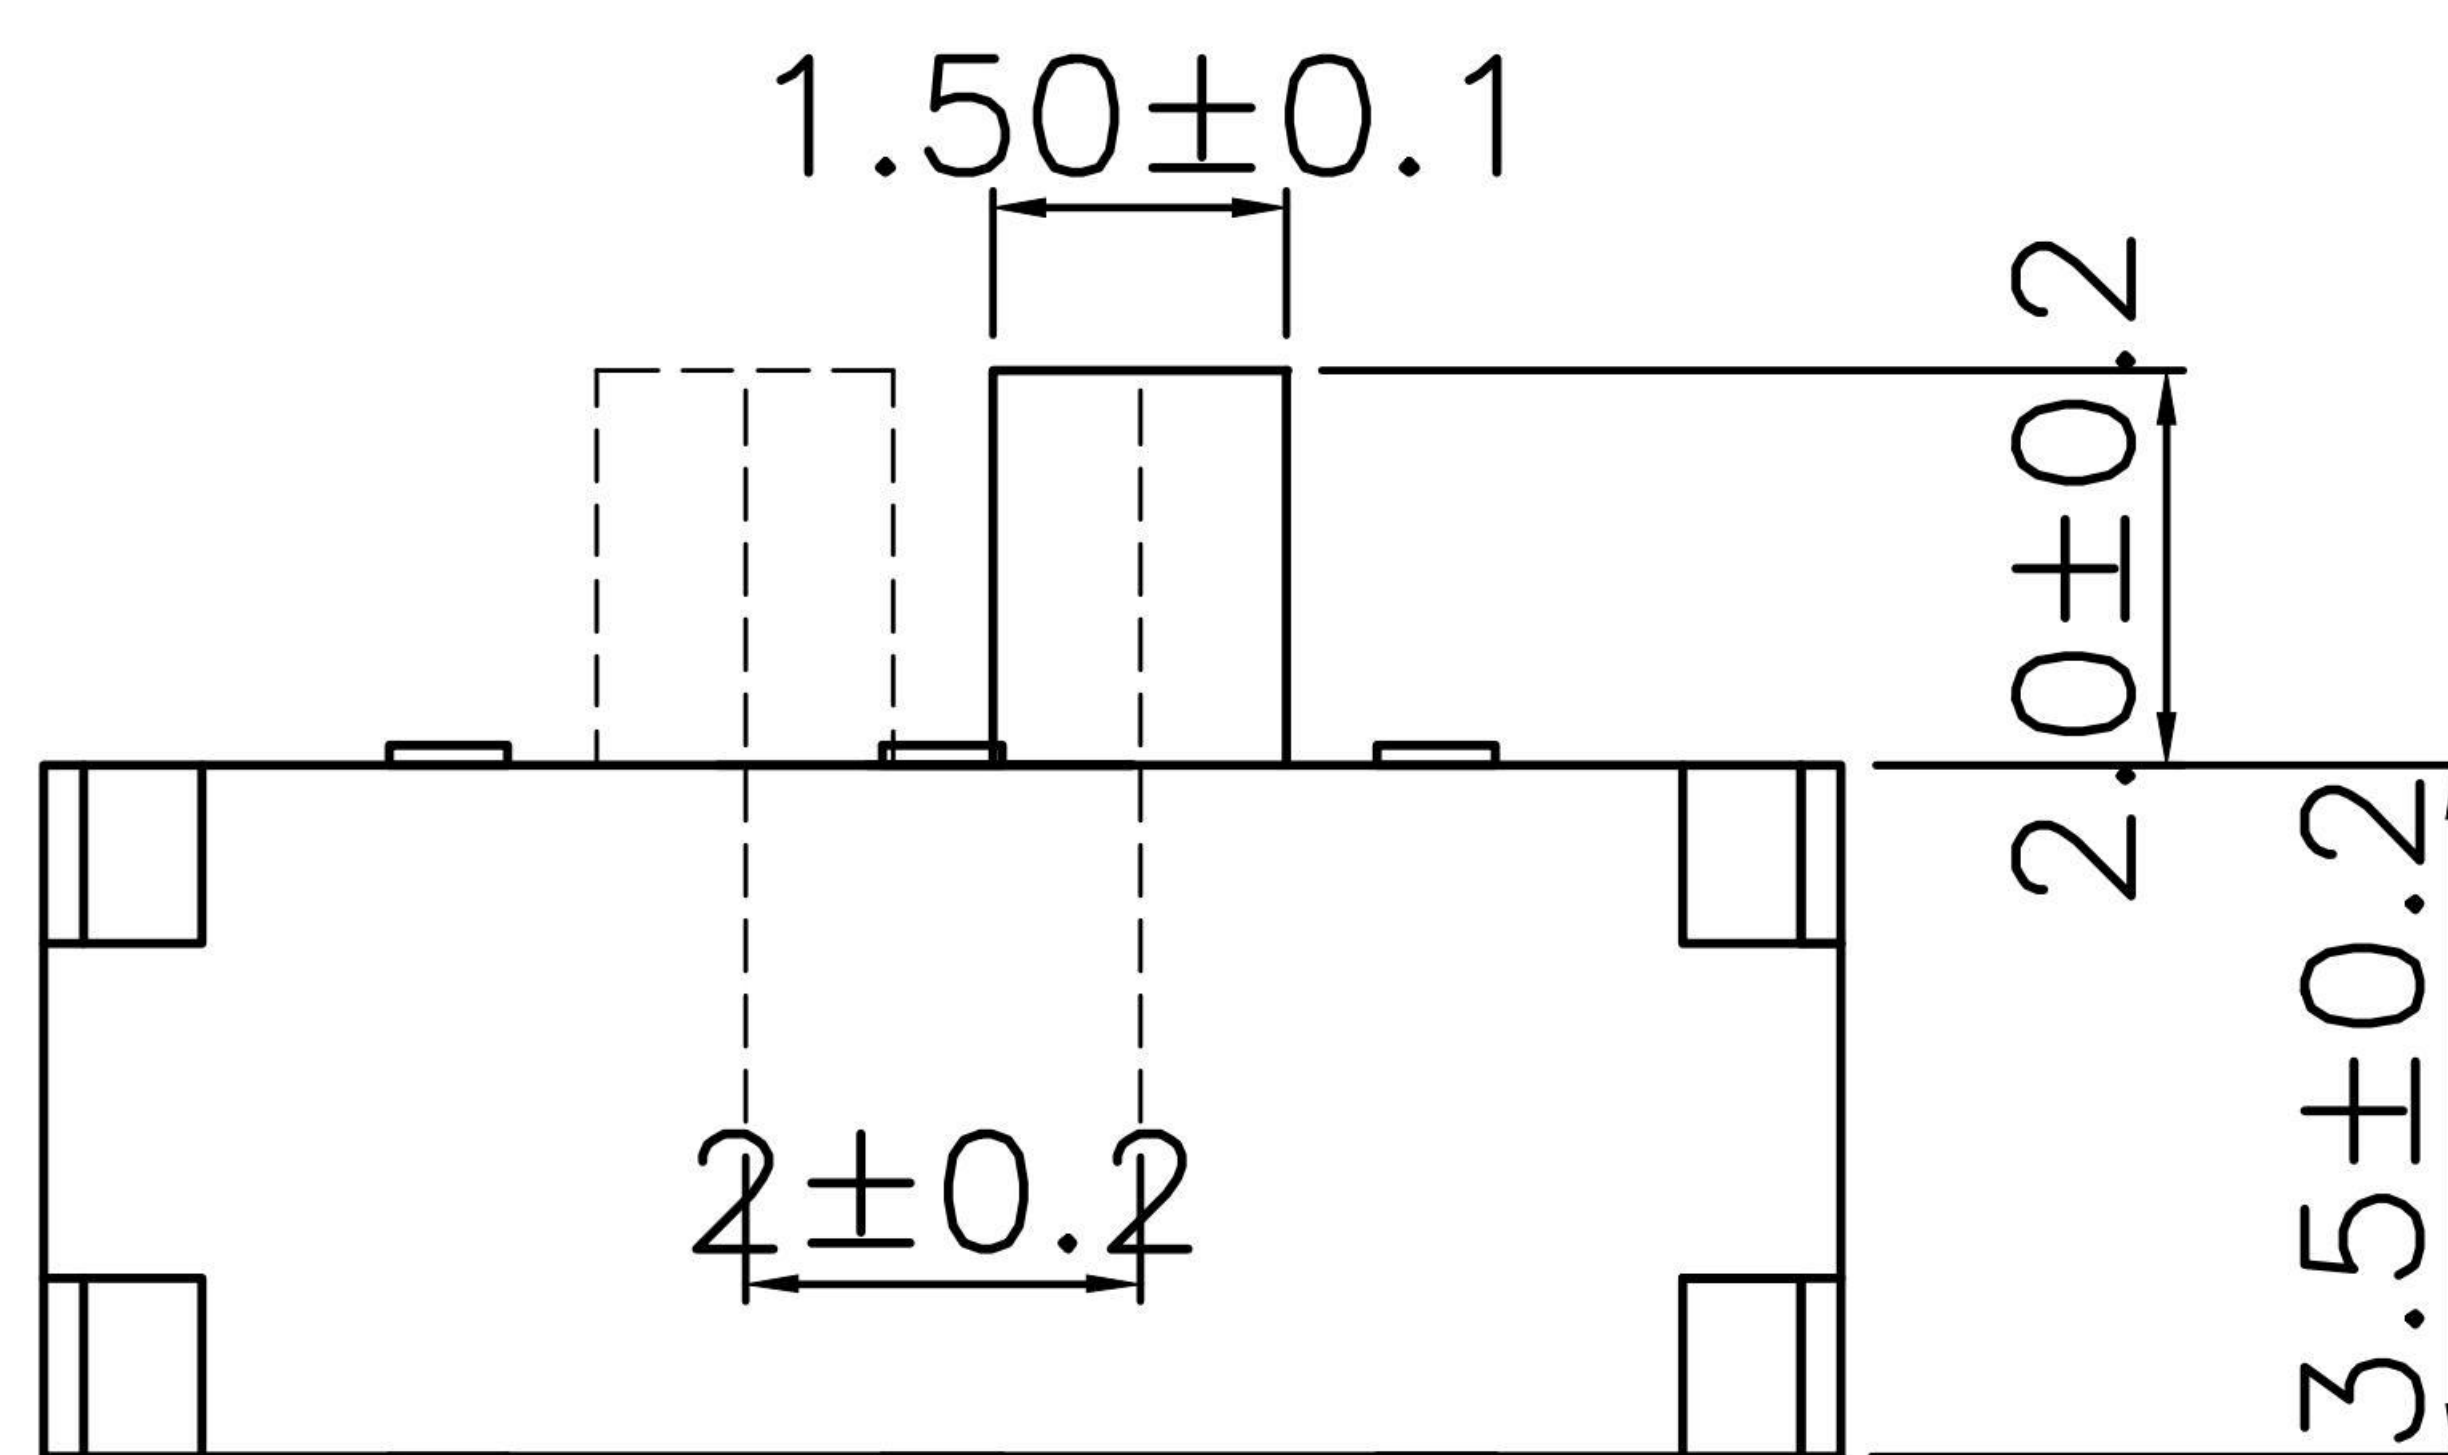

MK-22D10-GXXX

侧拨形式

G-Switch P/N




Switch Height (mm)

G020=2.0

G030=3.0

G040=4.0

PCB PLERING PLAN

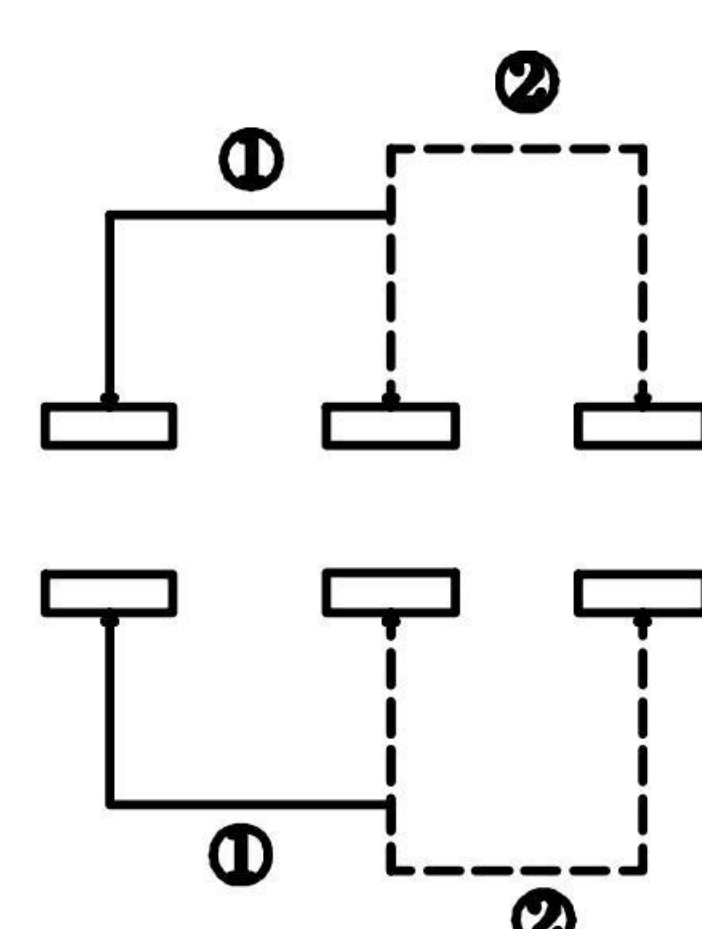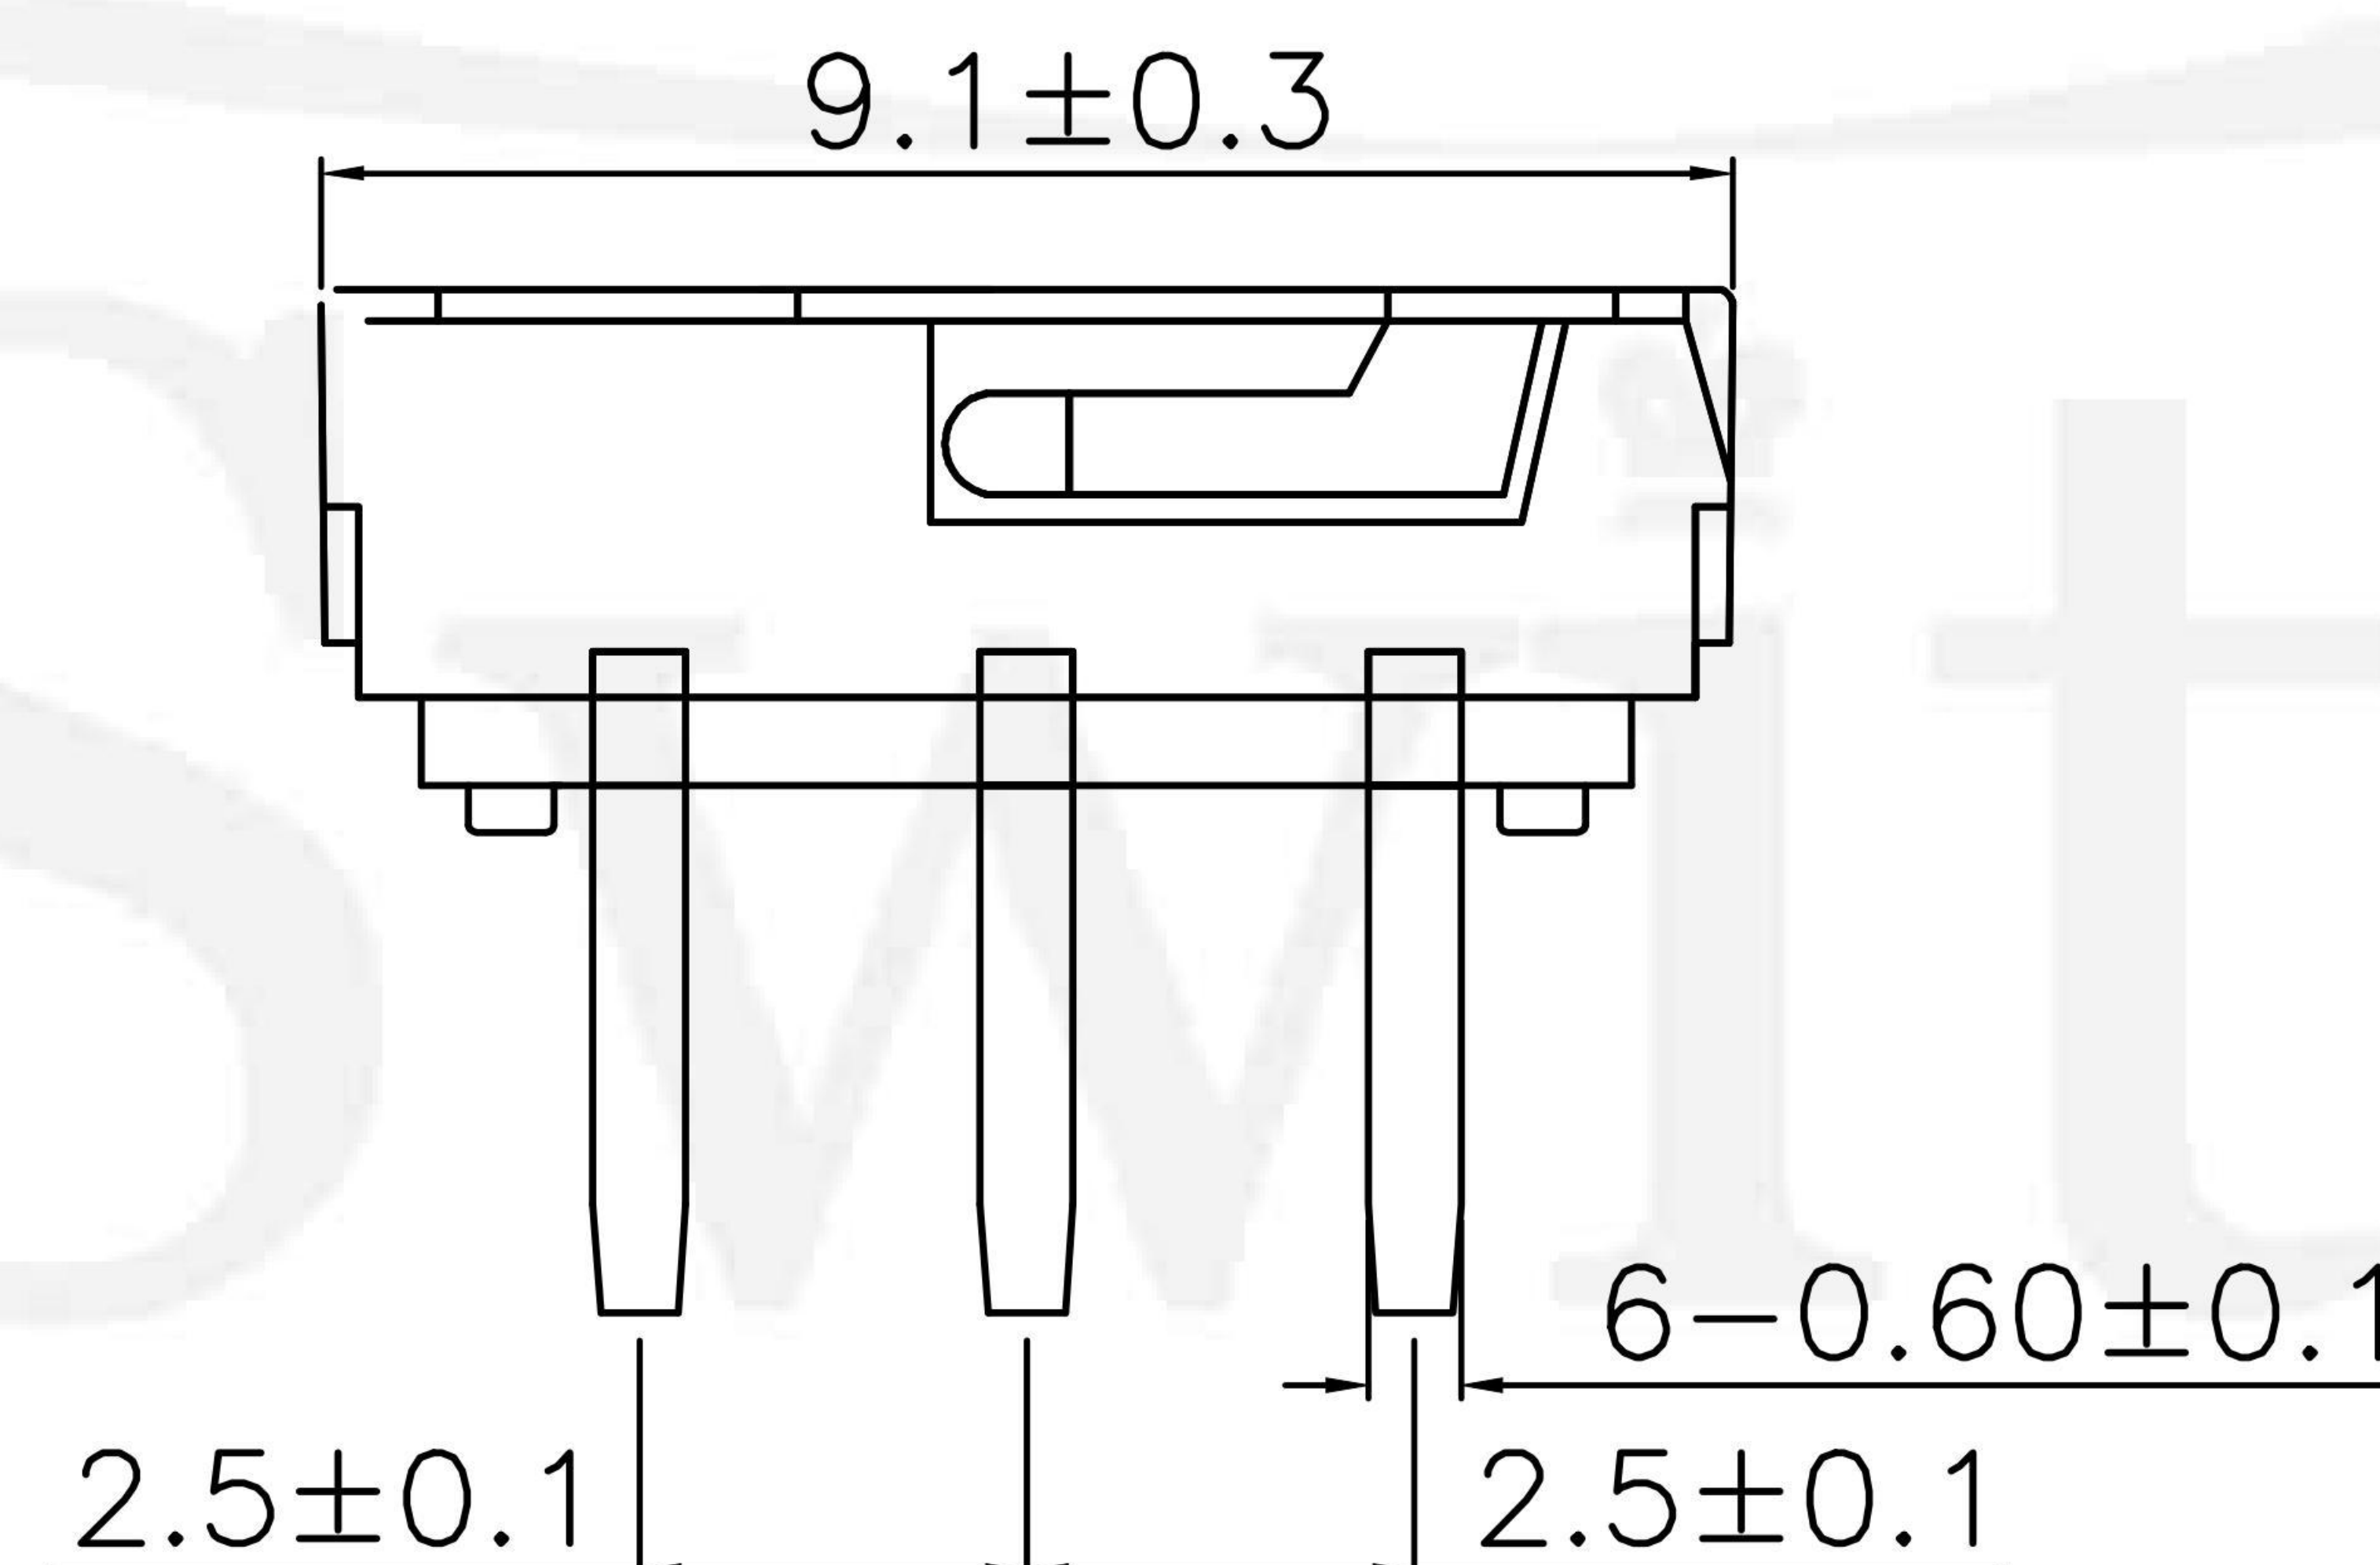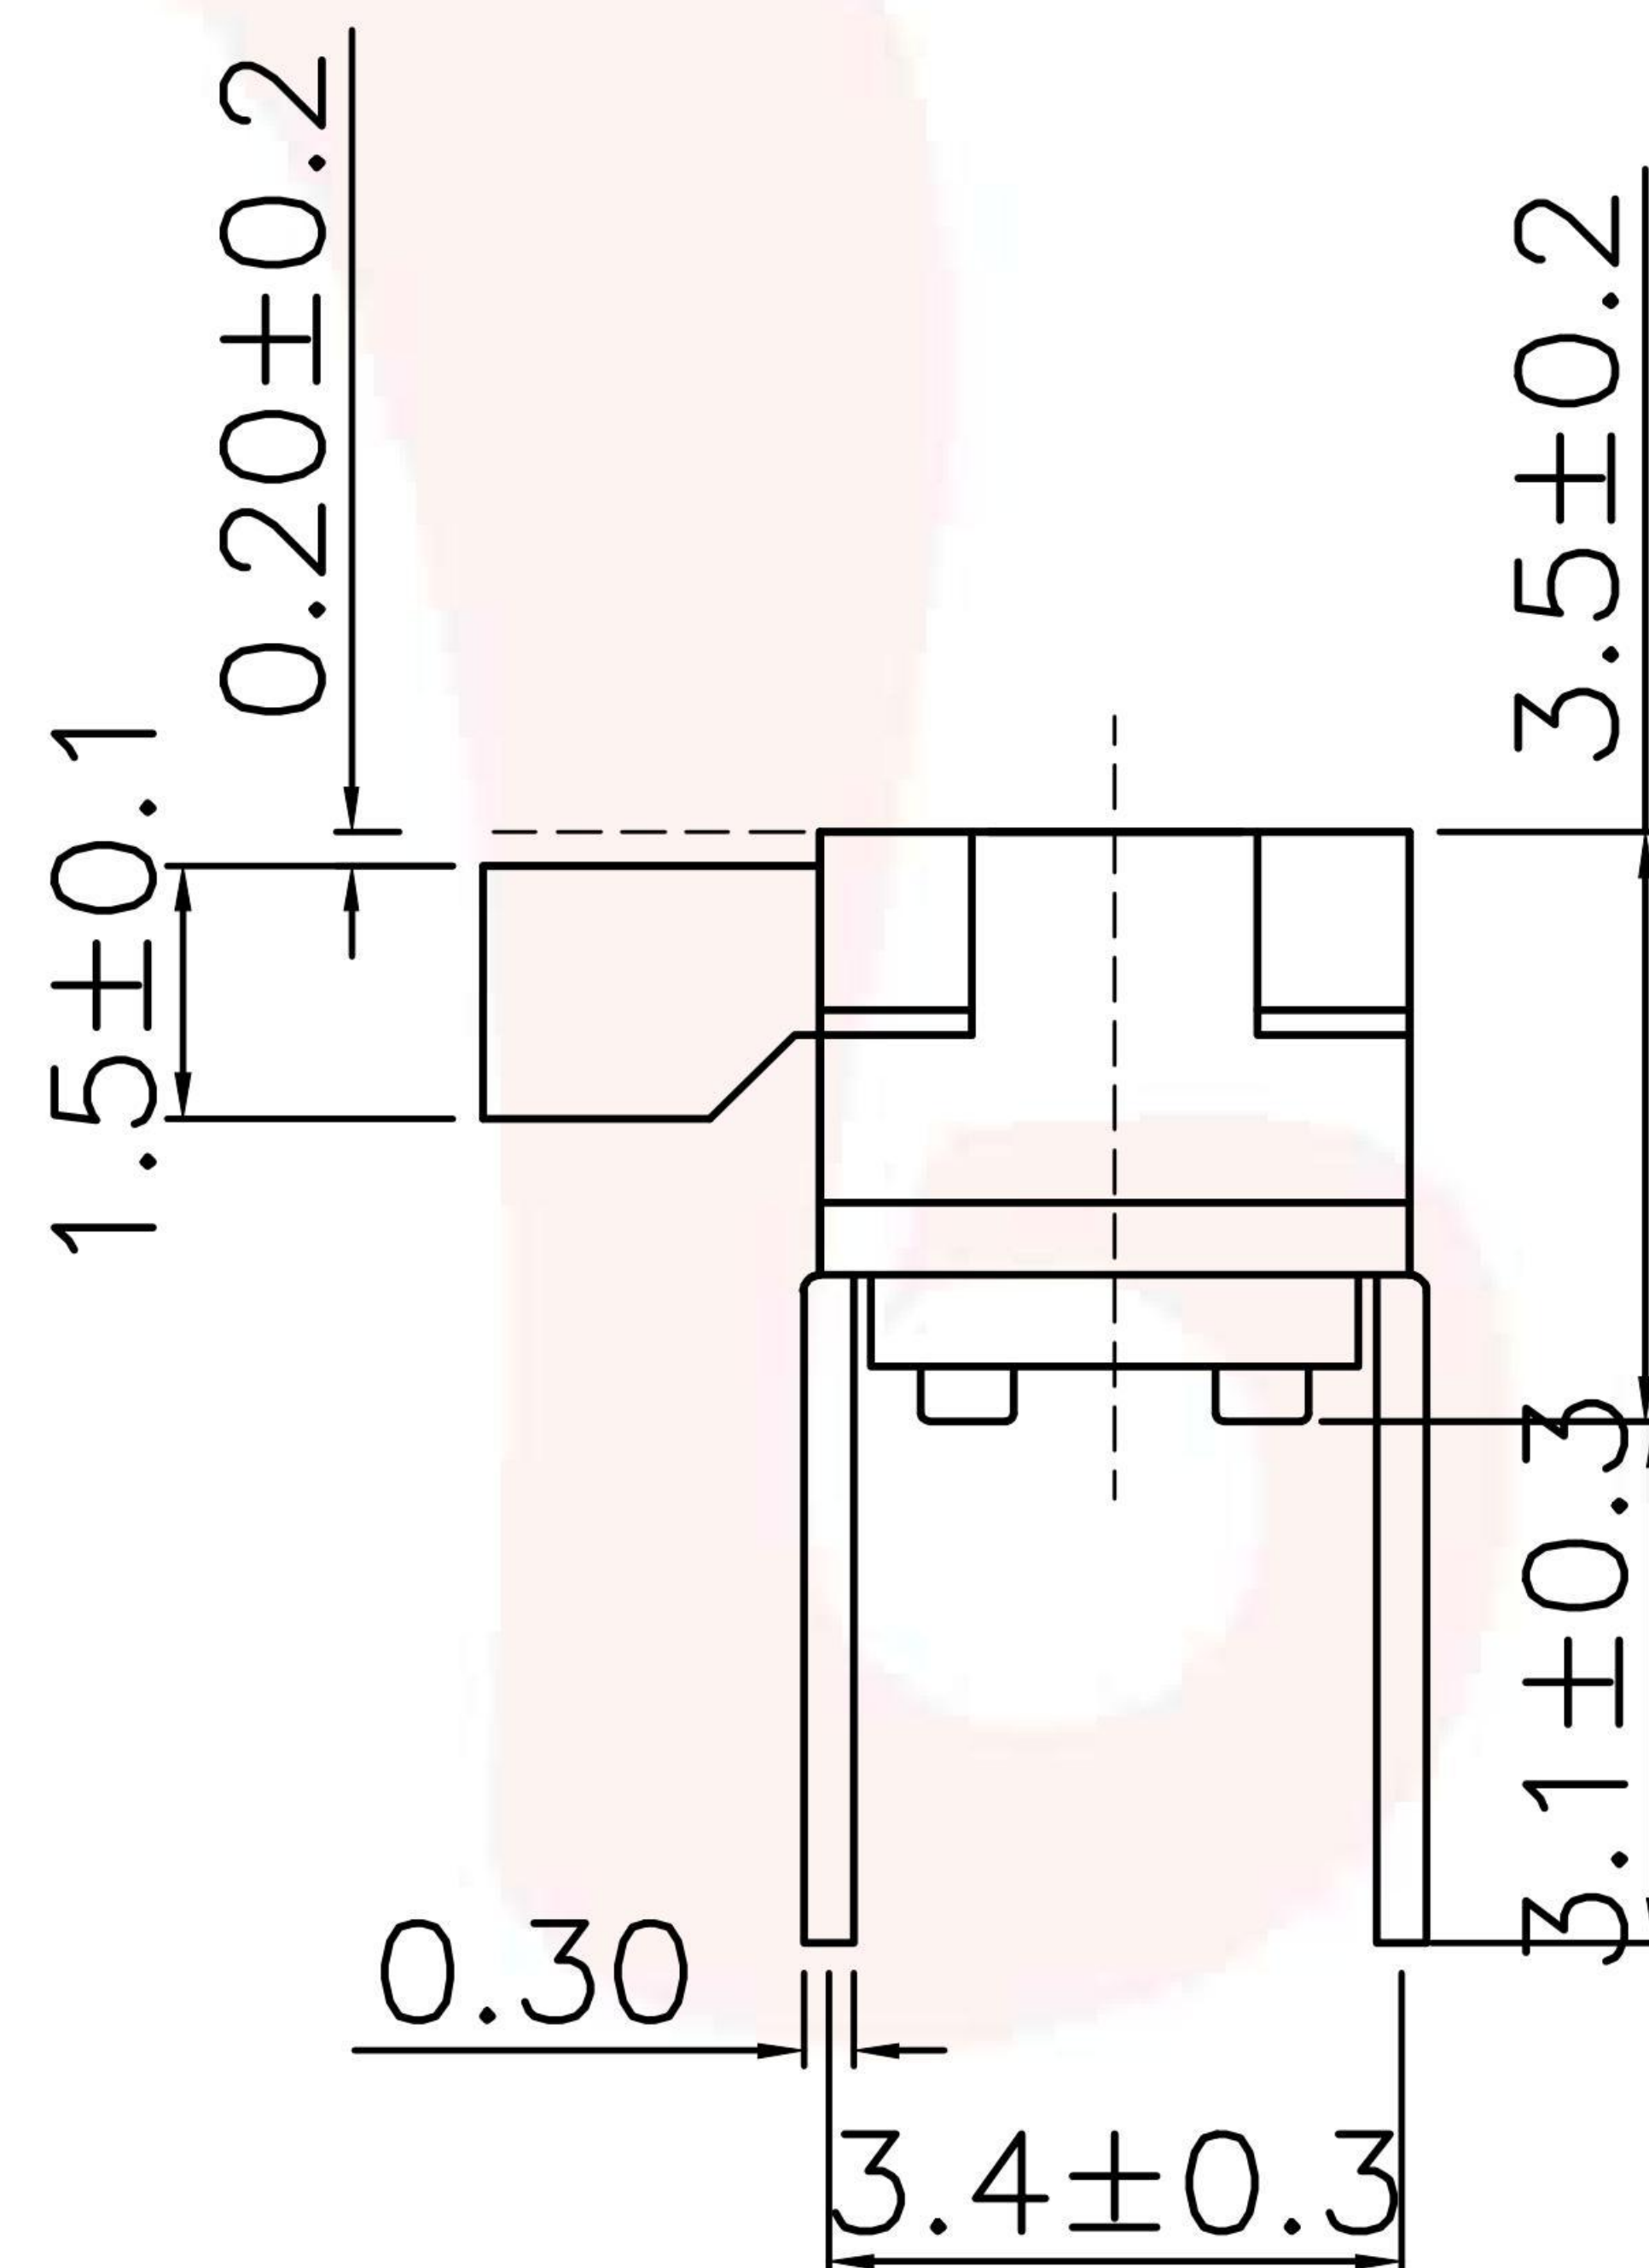

CIRCUIT DIAGRAM

G-Switch Specification:

Electrical Specifications: DC 12V 0.5A DC 6V 1.0A

Contact Resistance : 100mΩMAX

Insulation Resistance: 100M ohm 100V DC


Withstand Voltage: AC 250V for 1 min

Ambient Temperature: -20°C~+70°C

Relative Humidity: (40°C)≤85%

Reflow soldering: 250°C MAX

Life: 10,000 times

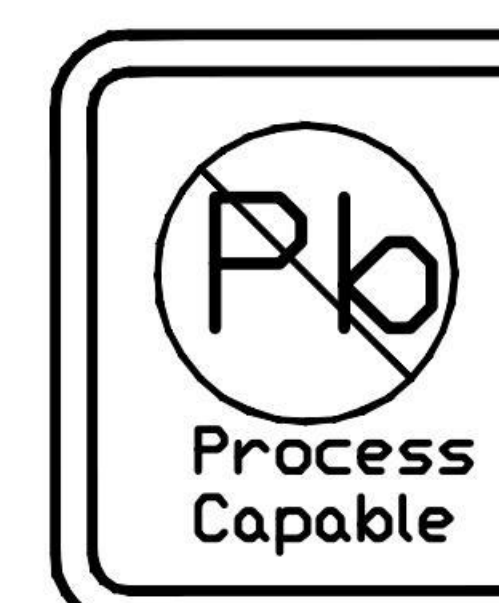

RoHS
Compliant
2002/95/EC



Unless otherwise
specified, Tolerance:

X. ±0.30
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
Angles ±3°

G-Switch Electronic (HongKong) CO.,Ltd.

DESIGN Yvette Chen	DATE 2019.05.29	Molde code:		
CHECKED	DATE	MK-22D10-GXXX		
APPROVED	DATE			
http://www.dg-switch.com		REV.: X1	SCALE: 4:1	UNIT: mm
TEL:0769-82388879		SIZE: A4	SHEET: 1/1	