

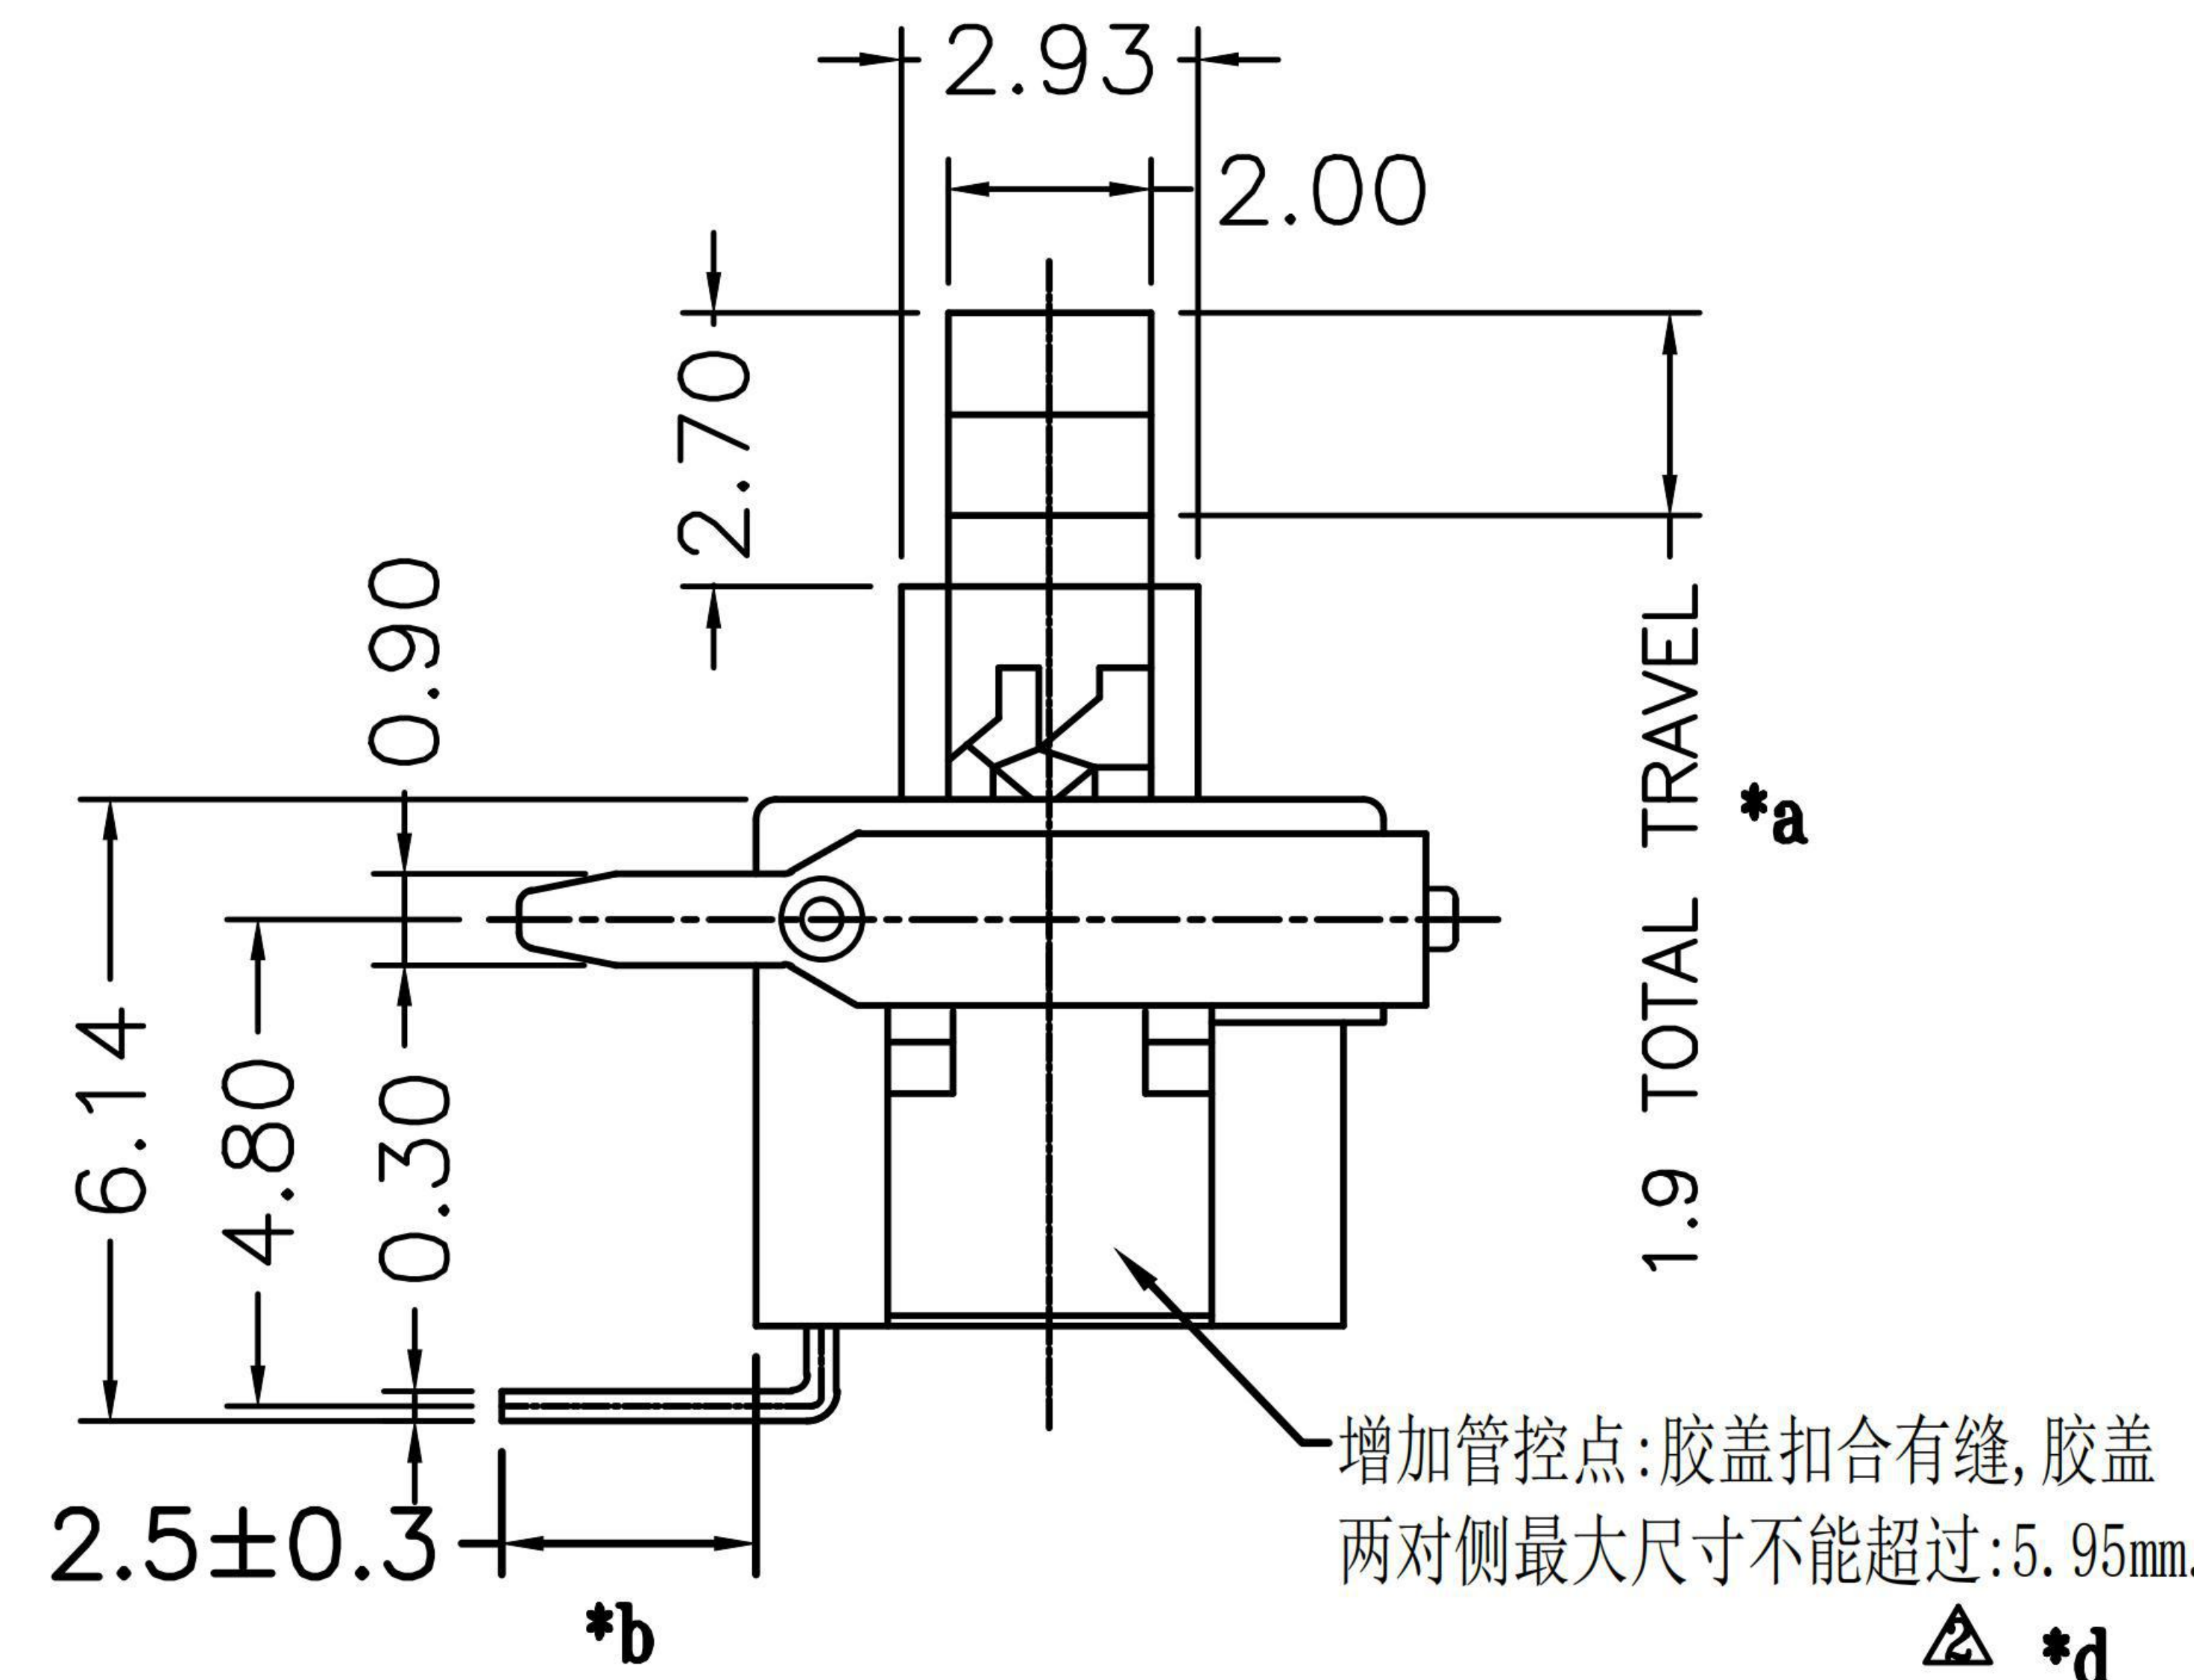
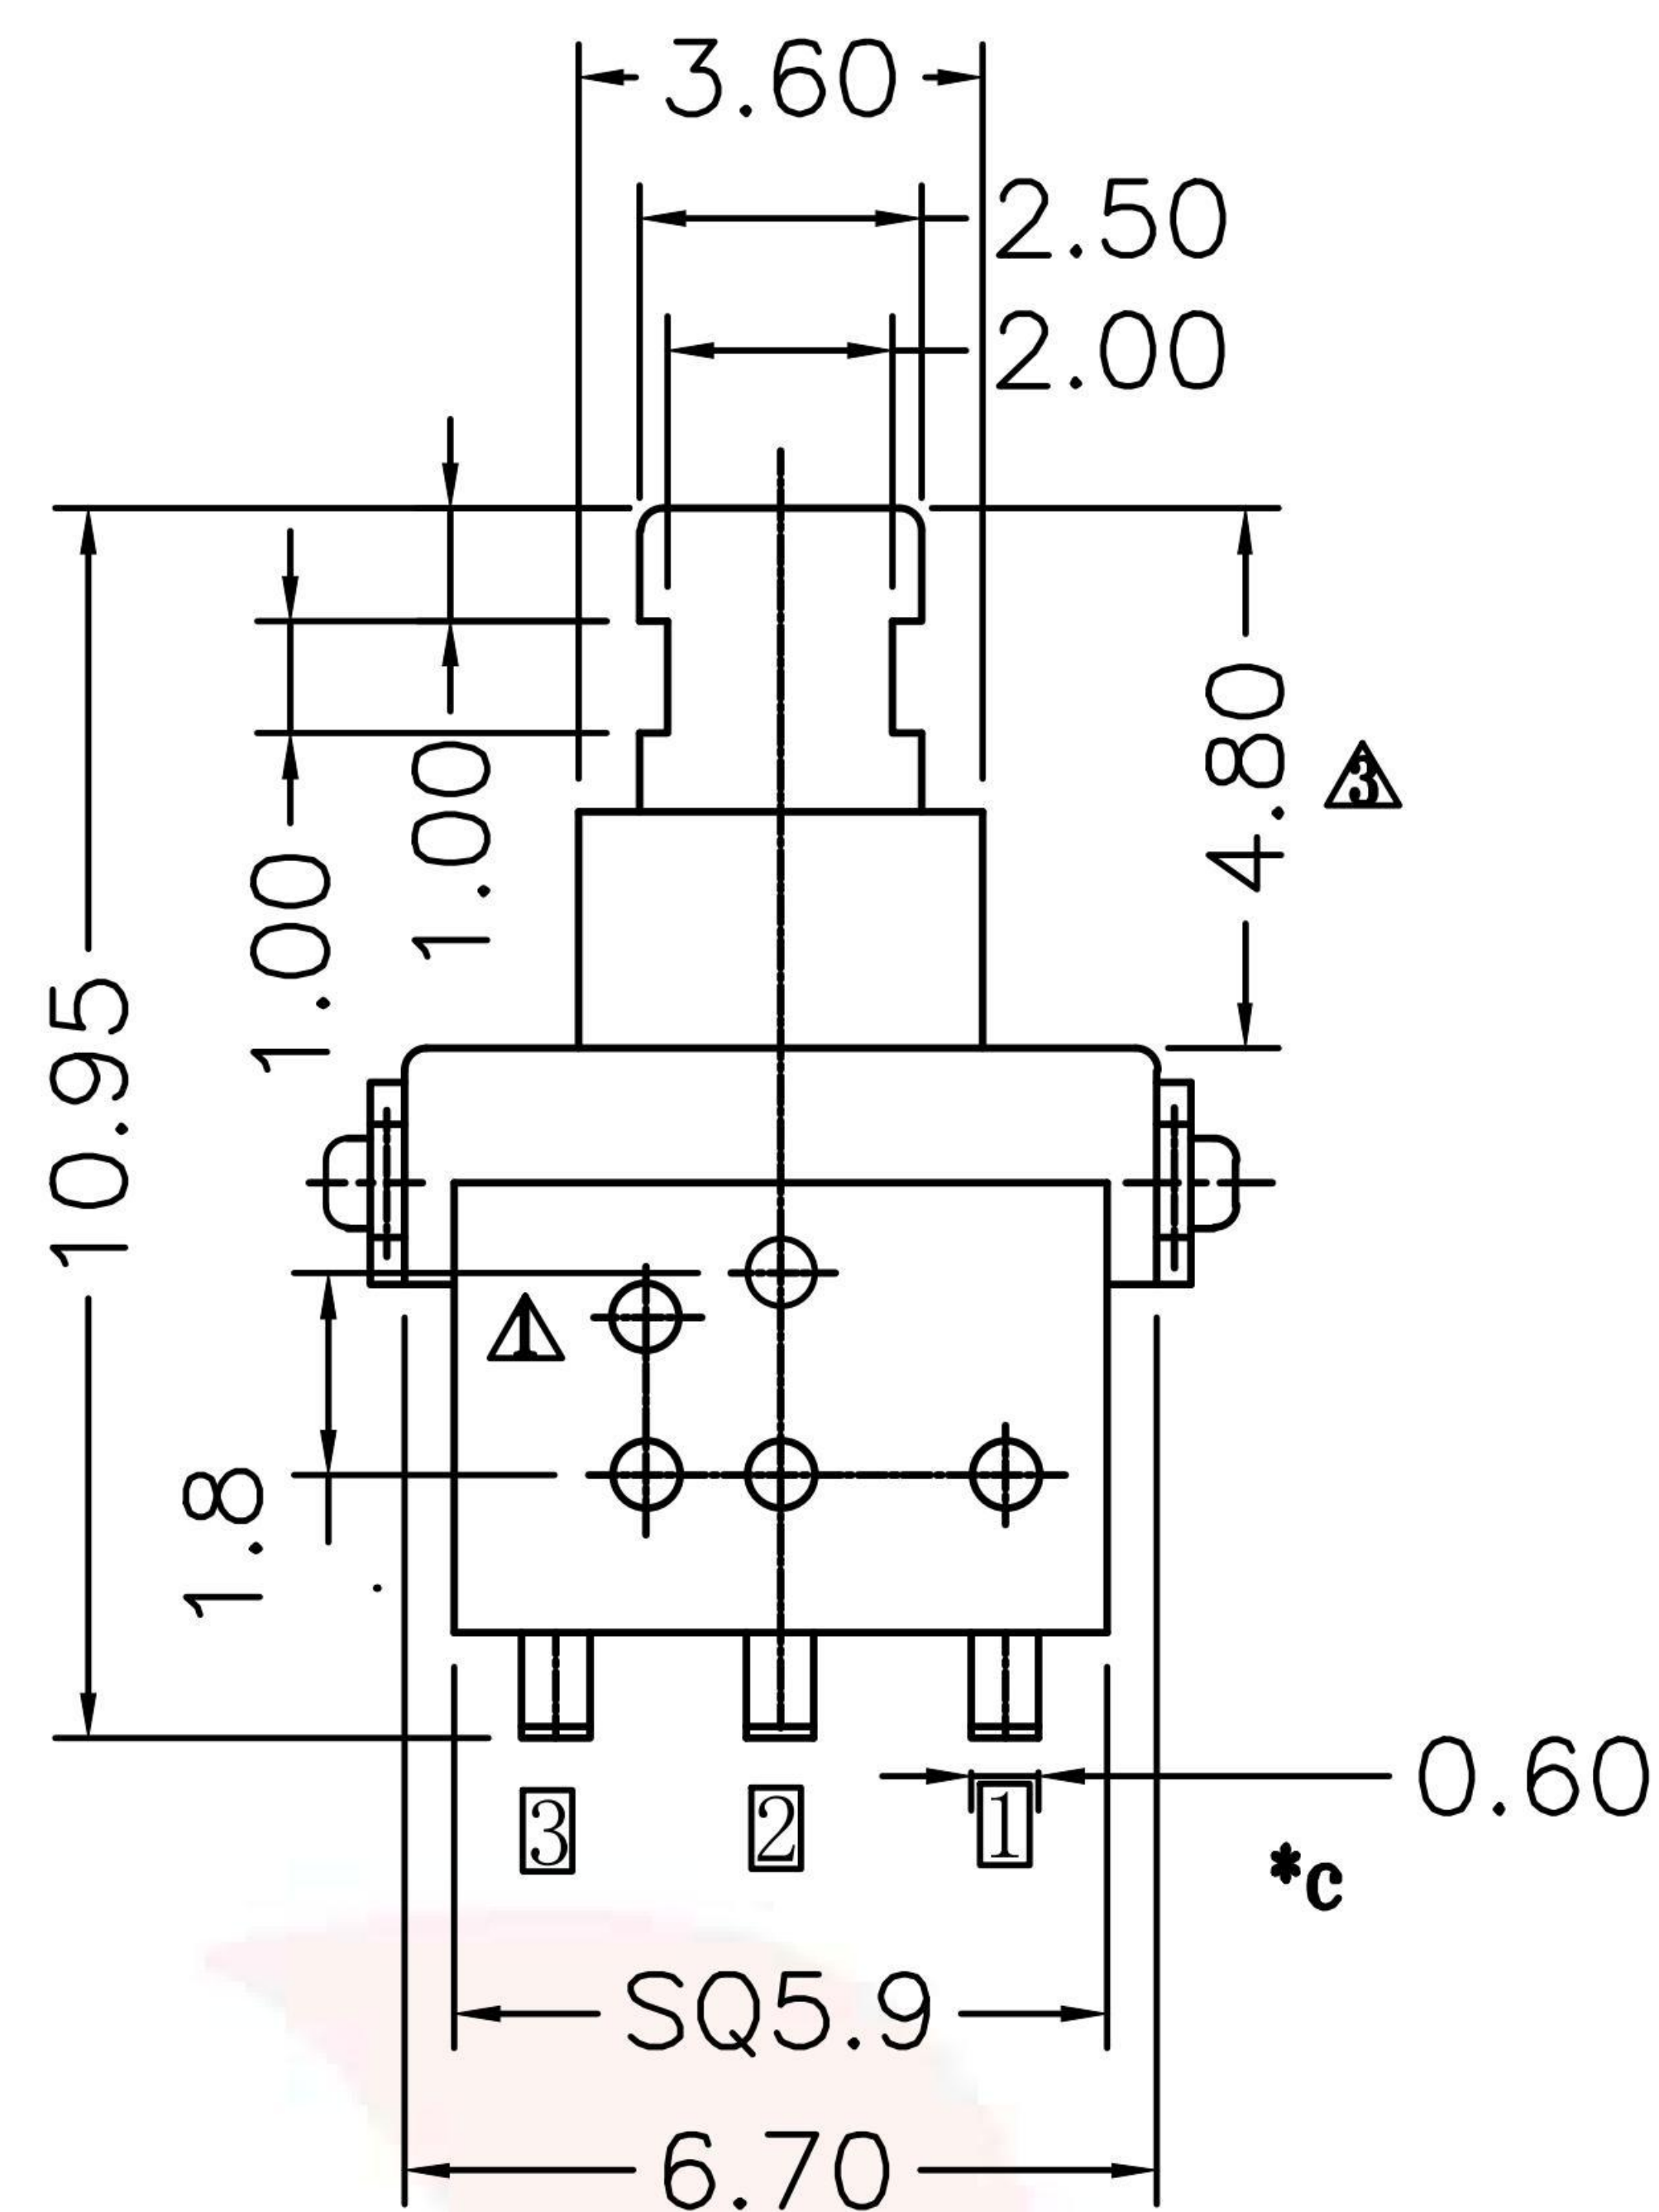


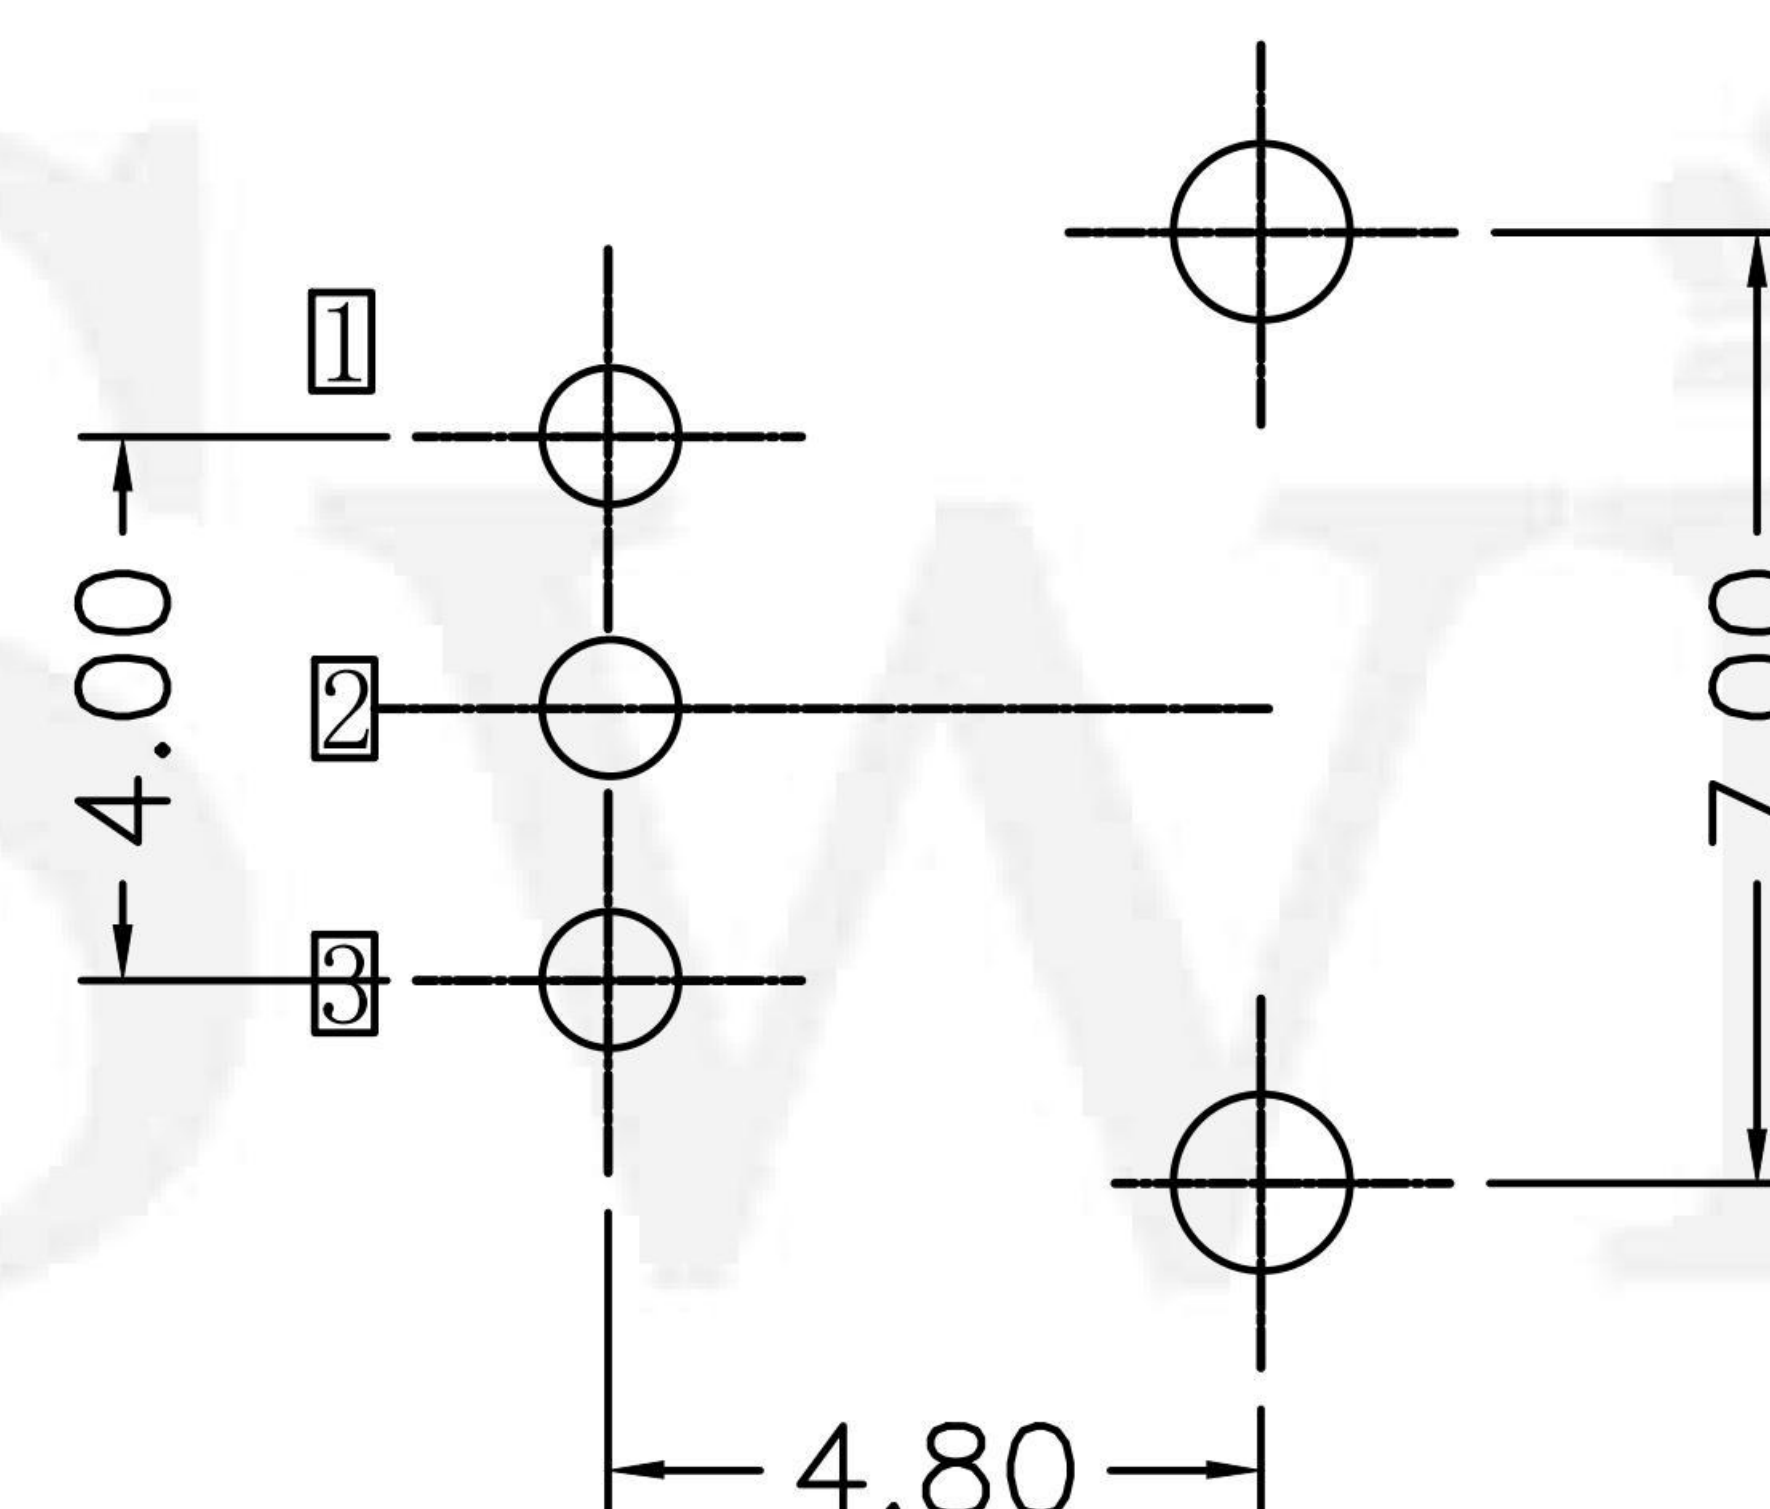

PS-5850C-5PX


X=NO LOCK
L=LOCK

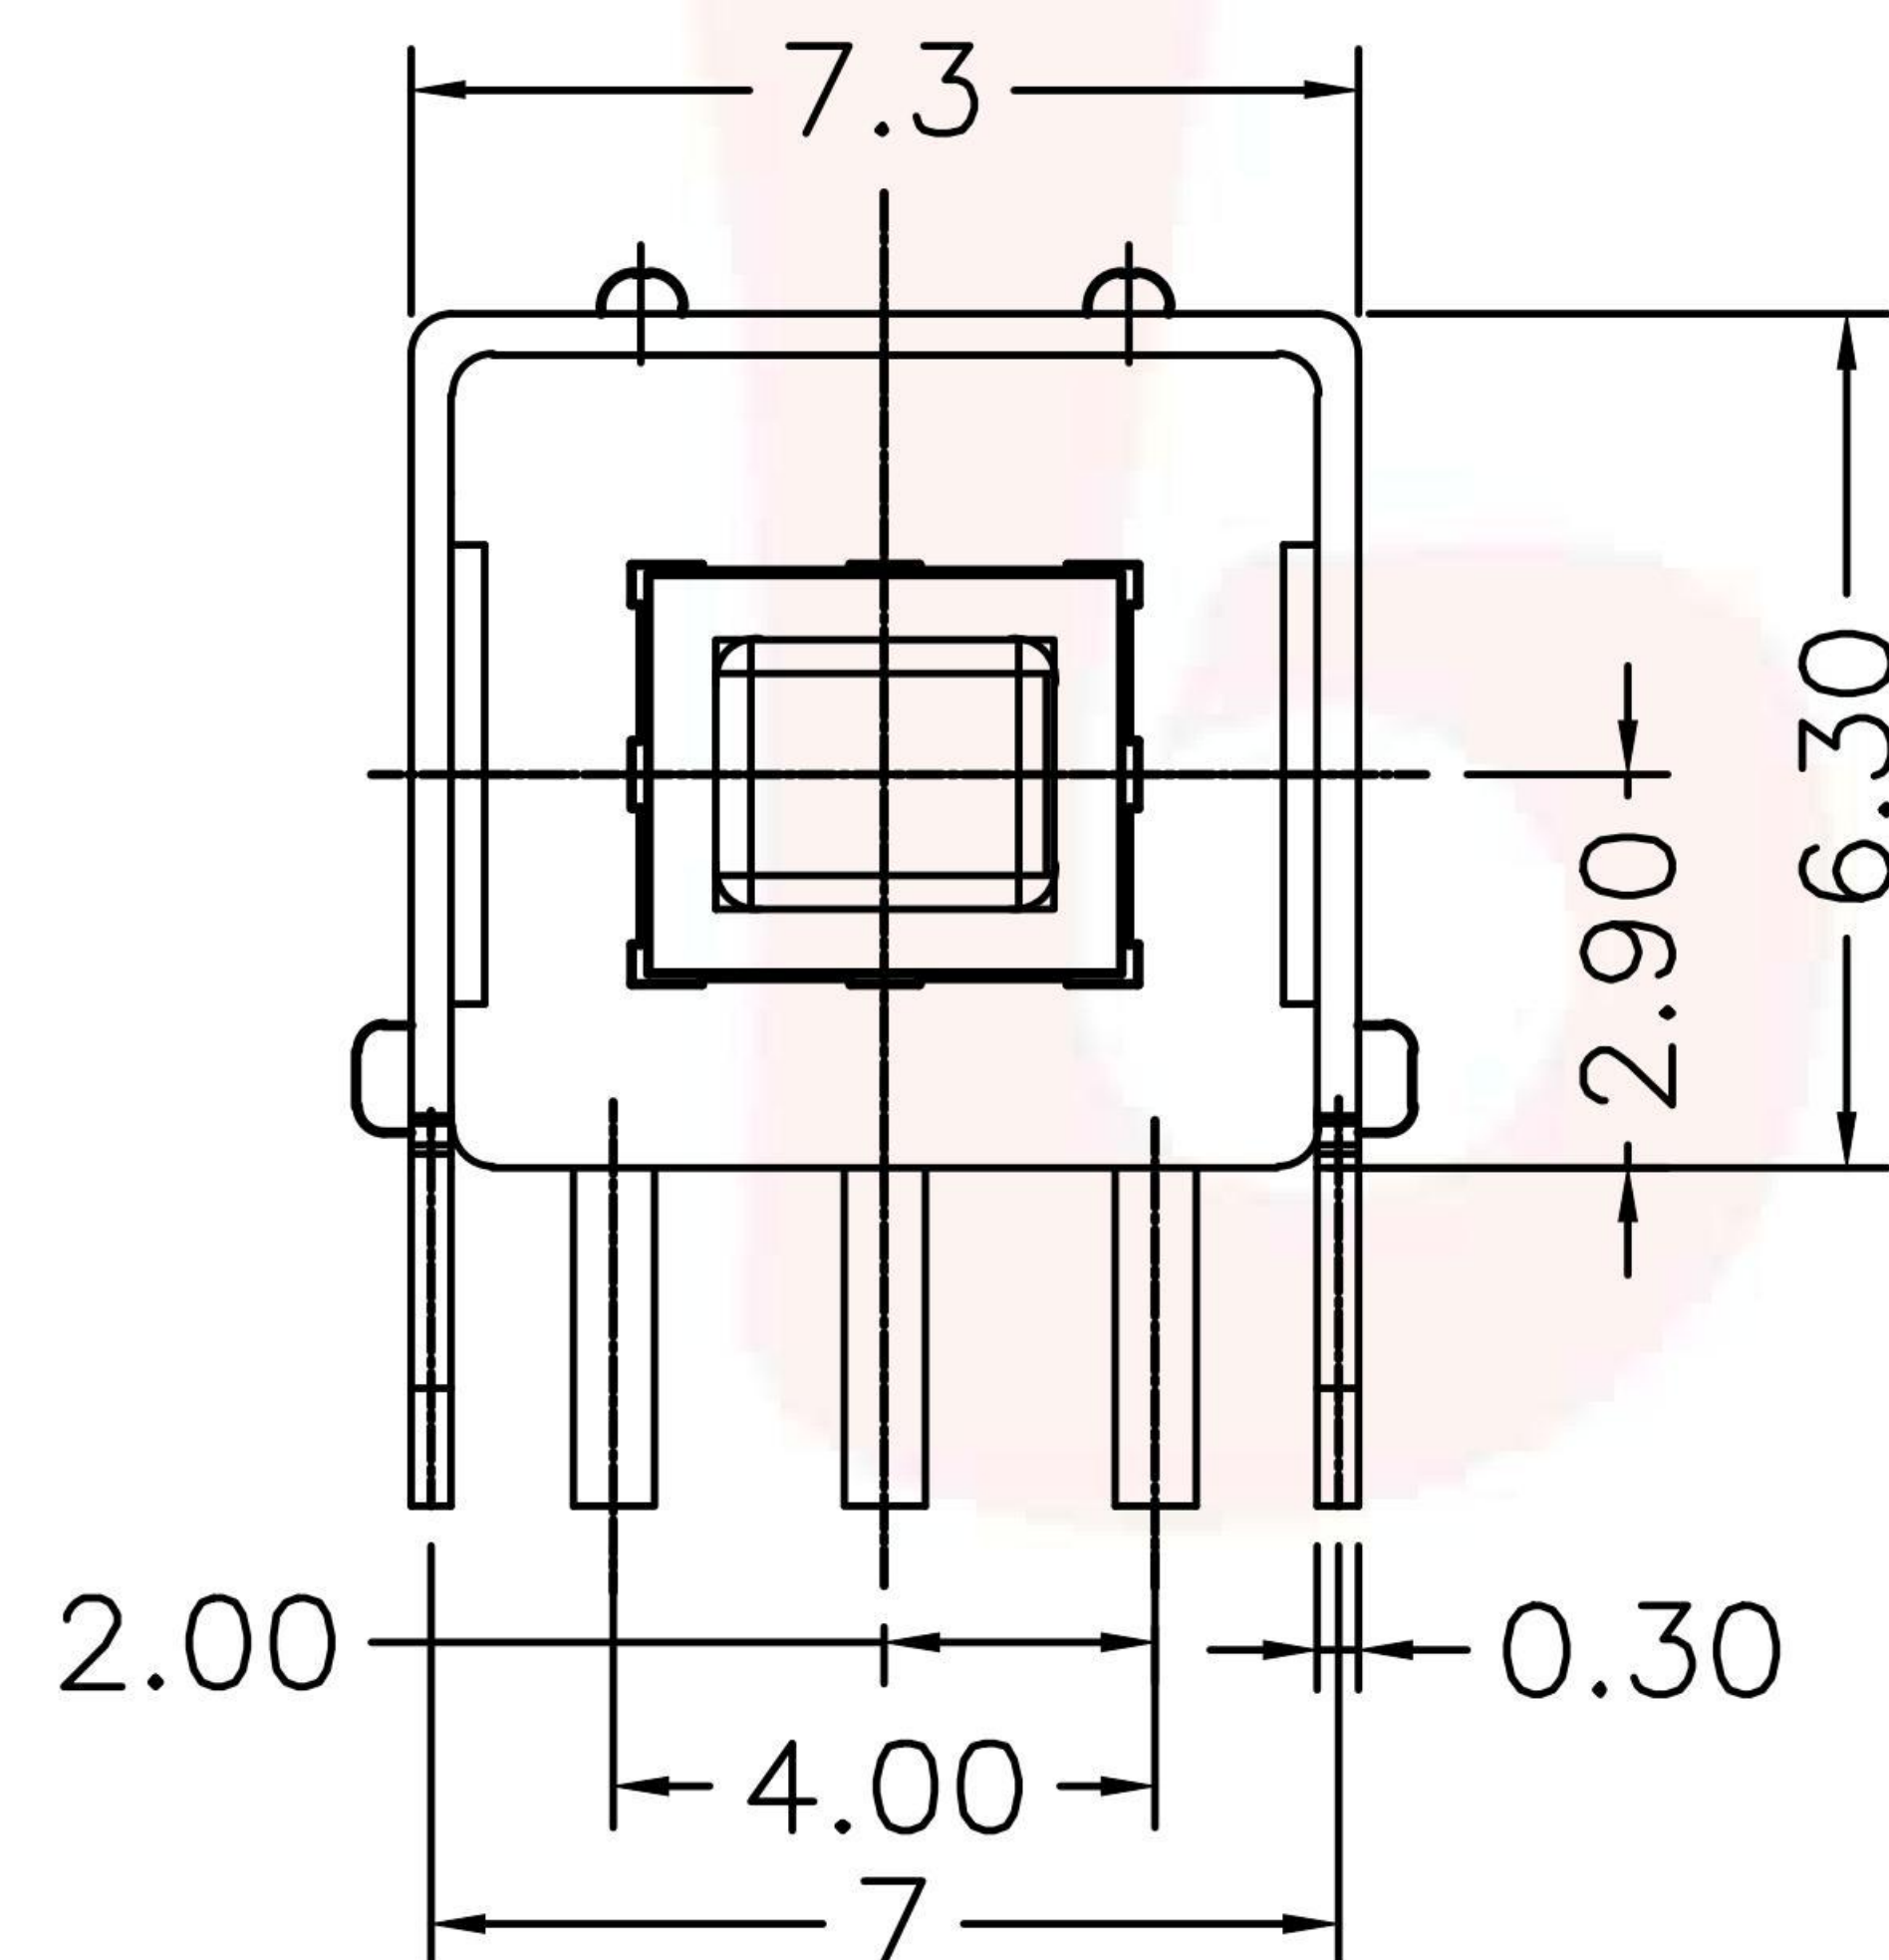


P.C.B LAYOUT

G-Switch Specification:

Electrical Specifications: 0.5A 30VDC
Contact Resistance : ≤100mΩ
Insulation Resistance: ≥100MΩ DC125V
Withstand Voltage: AC125V 1 minute
Operating Temperature: -25°C~+65°C
Storage Humidity: ≤85%RH
Electrical Life: 10,000
Mechanical Life: 100,000

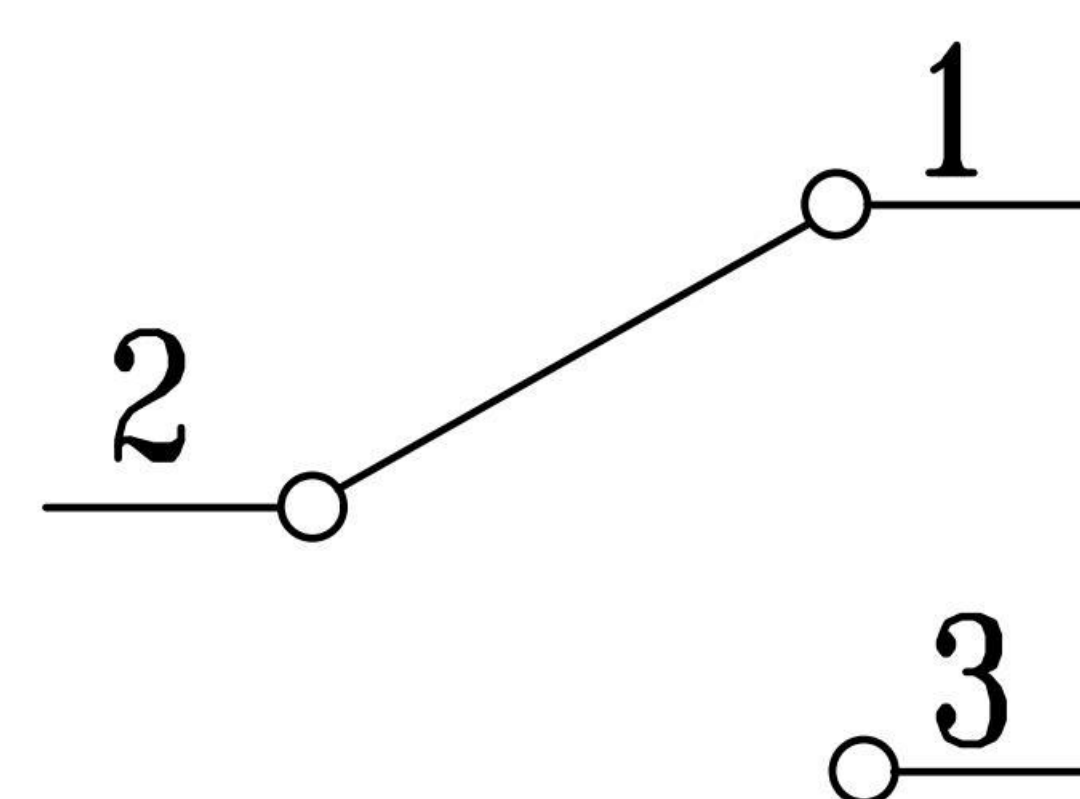

SCHEMATIC (SHORTING)

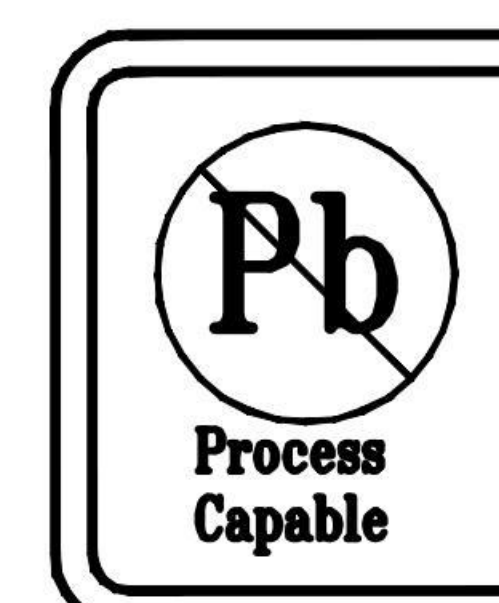

RoHS
Compliant
2002/95/EC



Unless otherwise specified, Tolerance:
X. ±0.30
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
Angles ±3°

G-Switch Electronic (HongKong) CO.,Ltd.

DESIGN Yvette Chen	DATE 2019.05.29	Molde code:		
CHECKED	DATE	PS-5850C-5PX		
APPROVED	DATE			
http://www.dg-switch.com		REV.: X1	SCALE: 4:1	UNIT: mm
TEL:0769-82388879		SIZE: A4	SHEET: 1/1	