
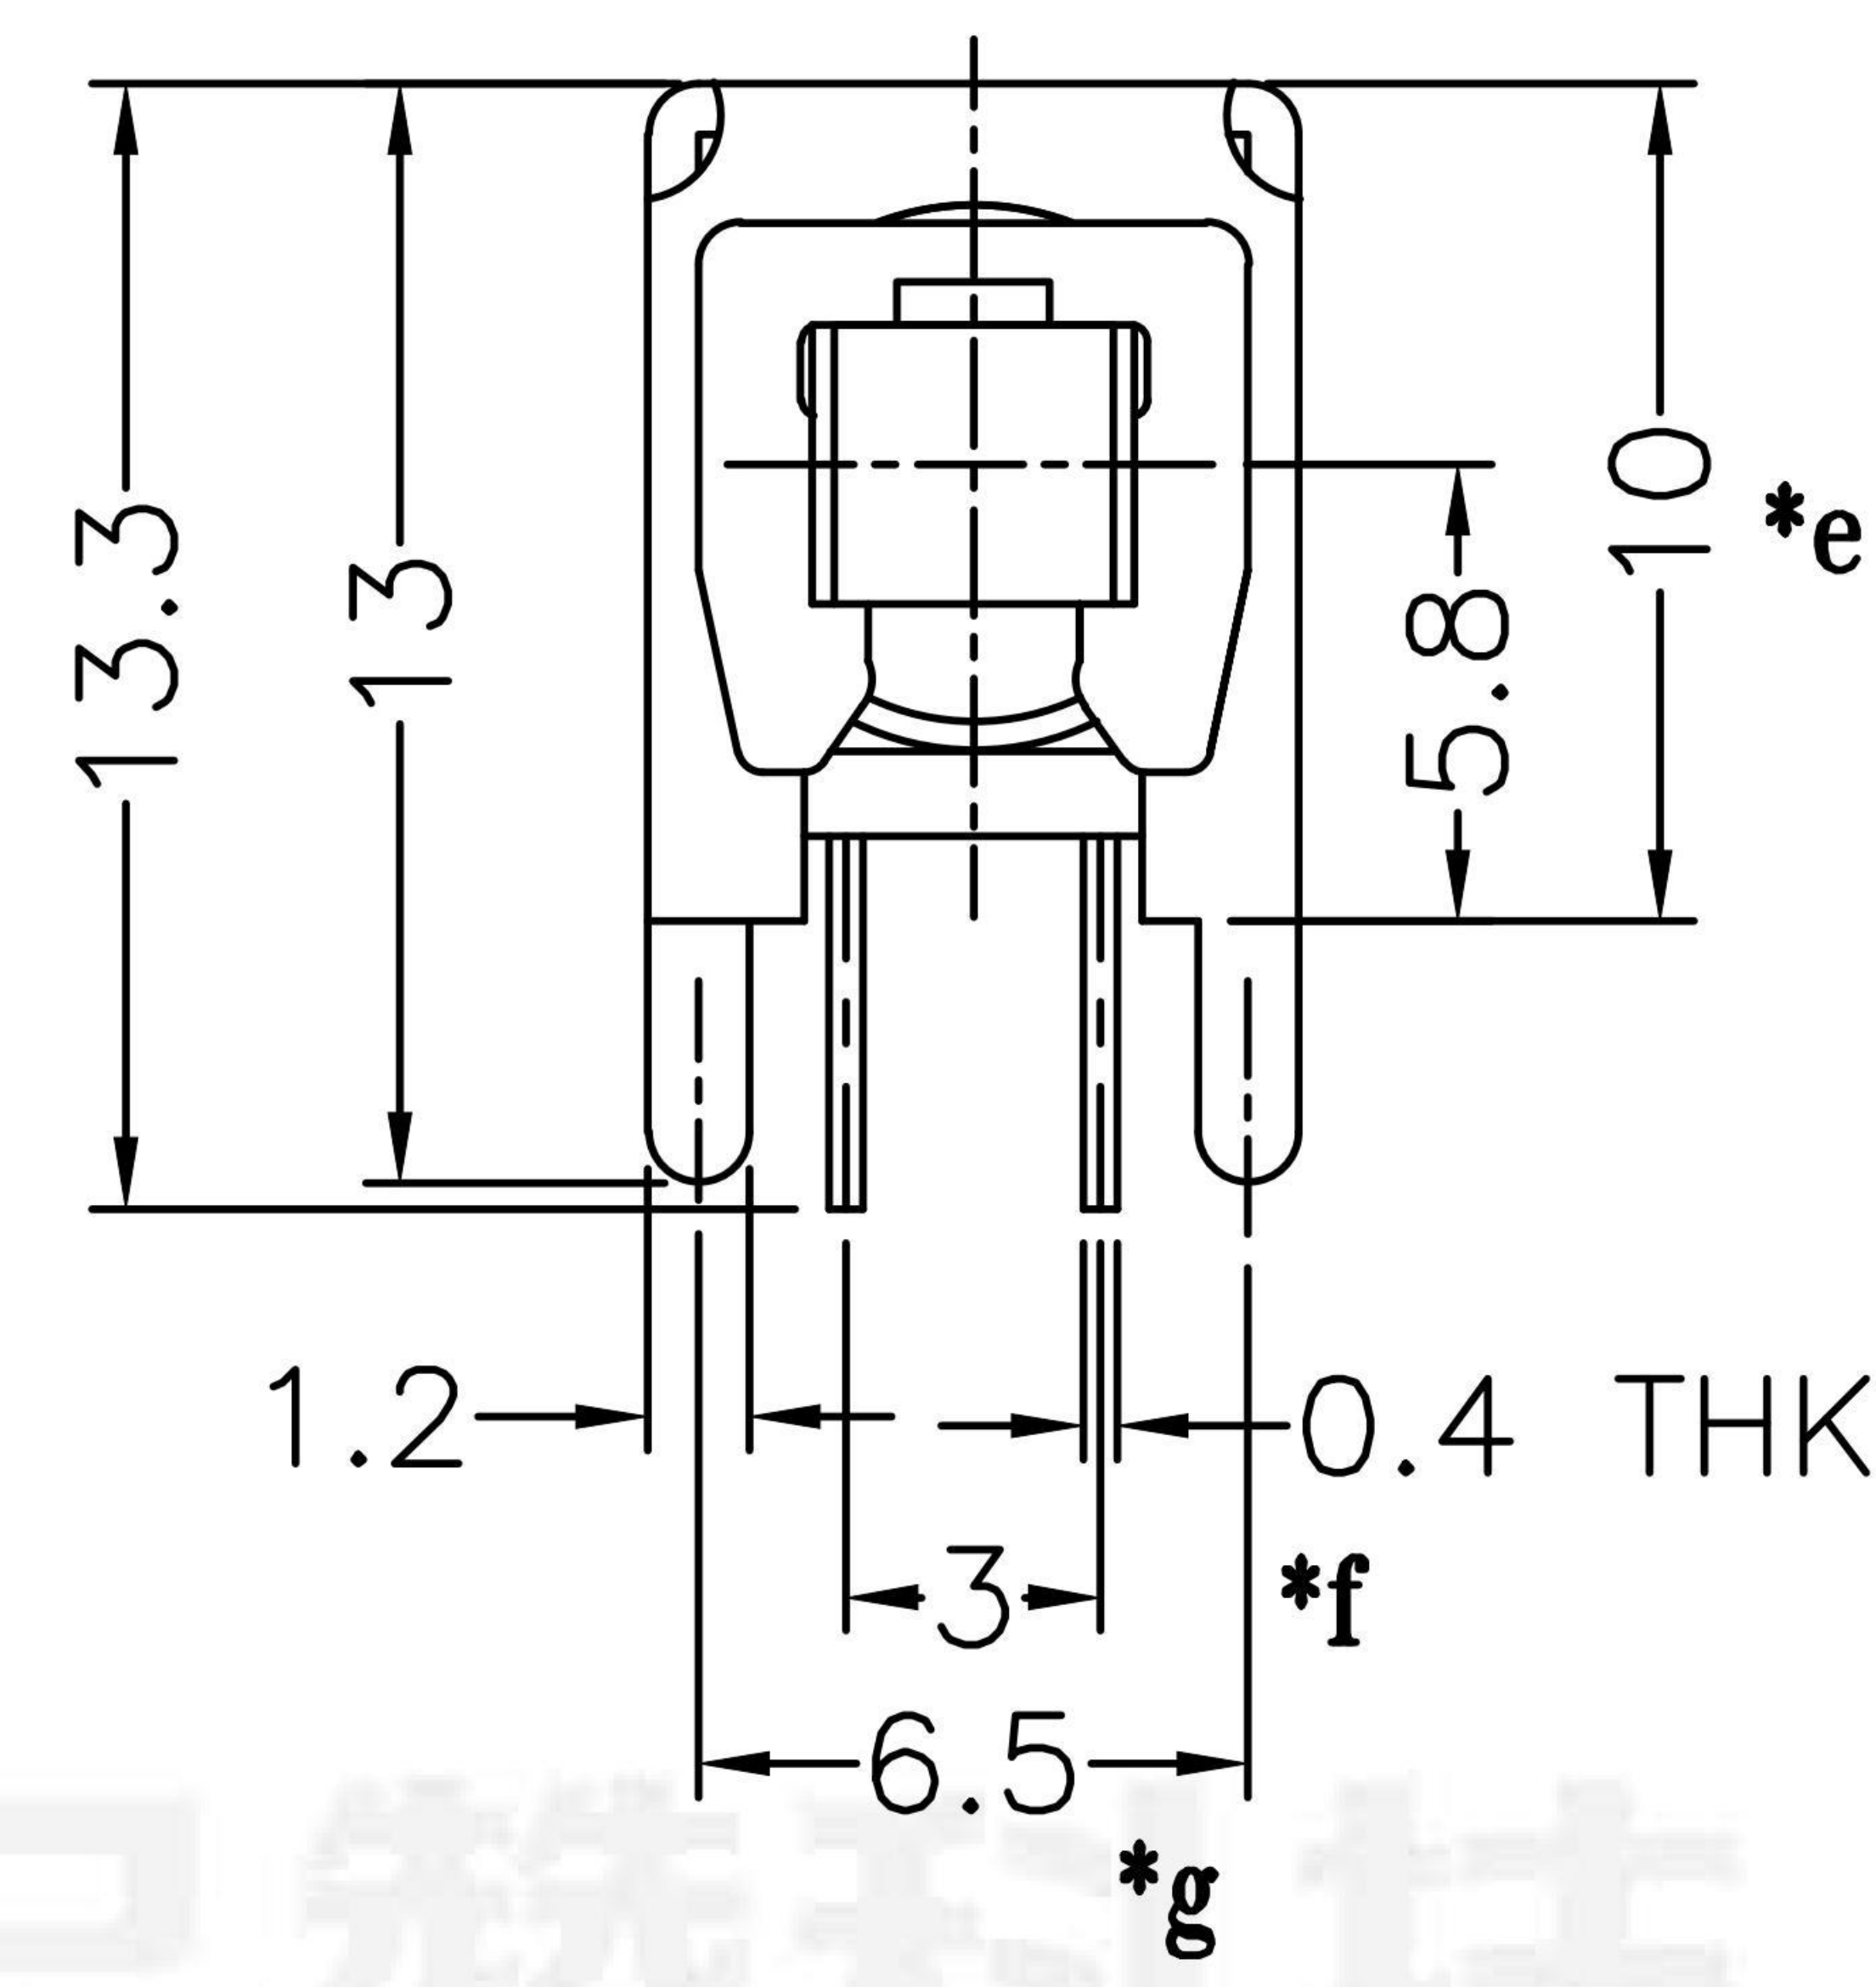


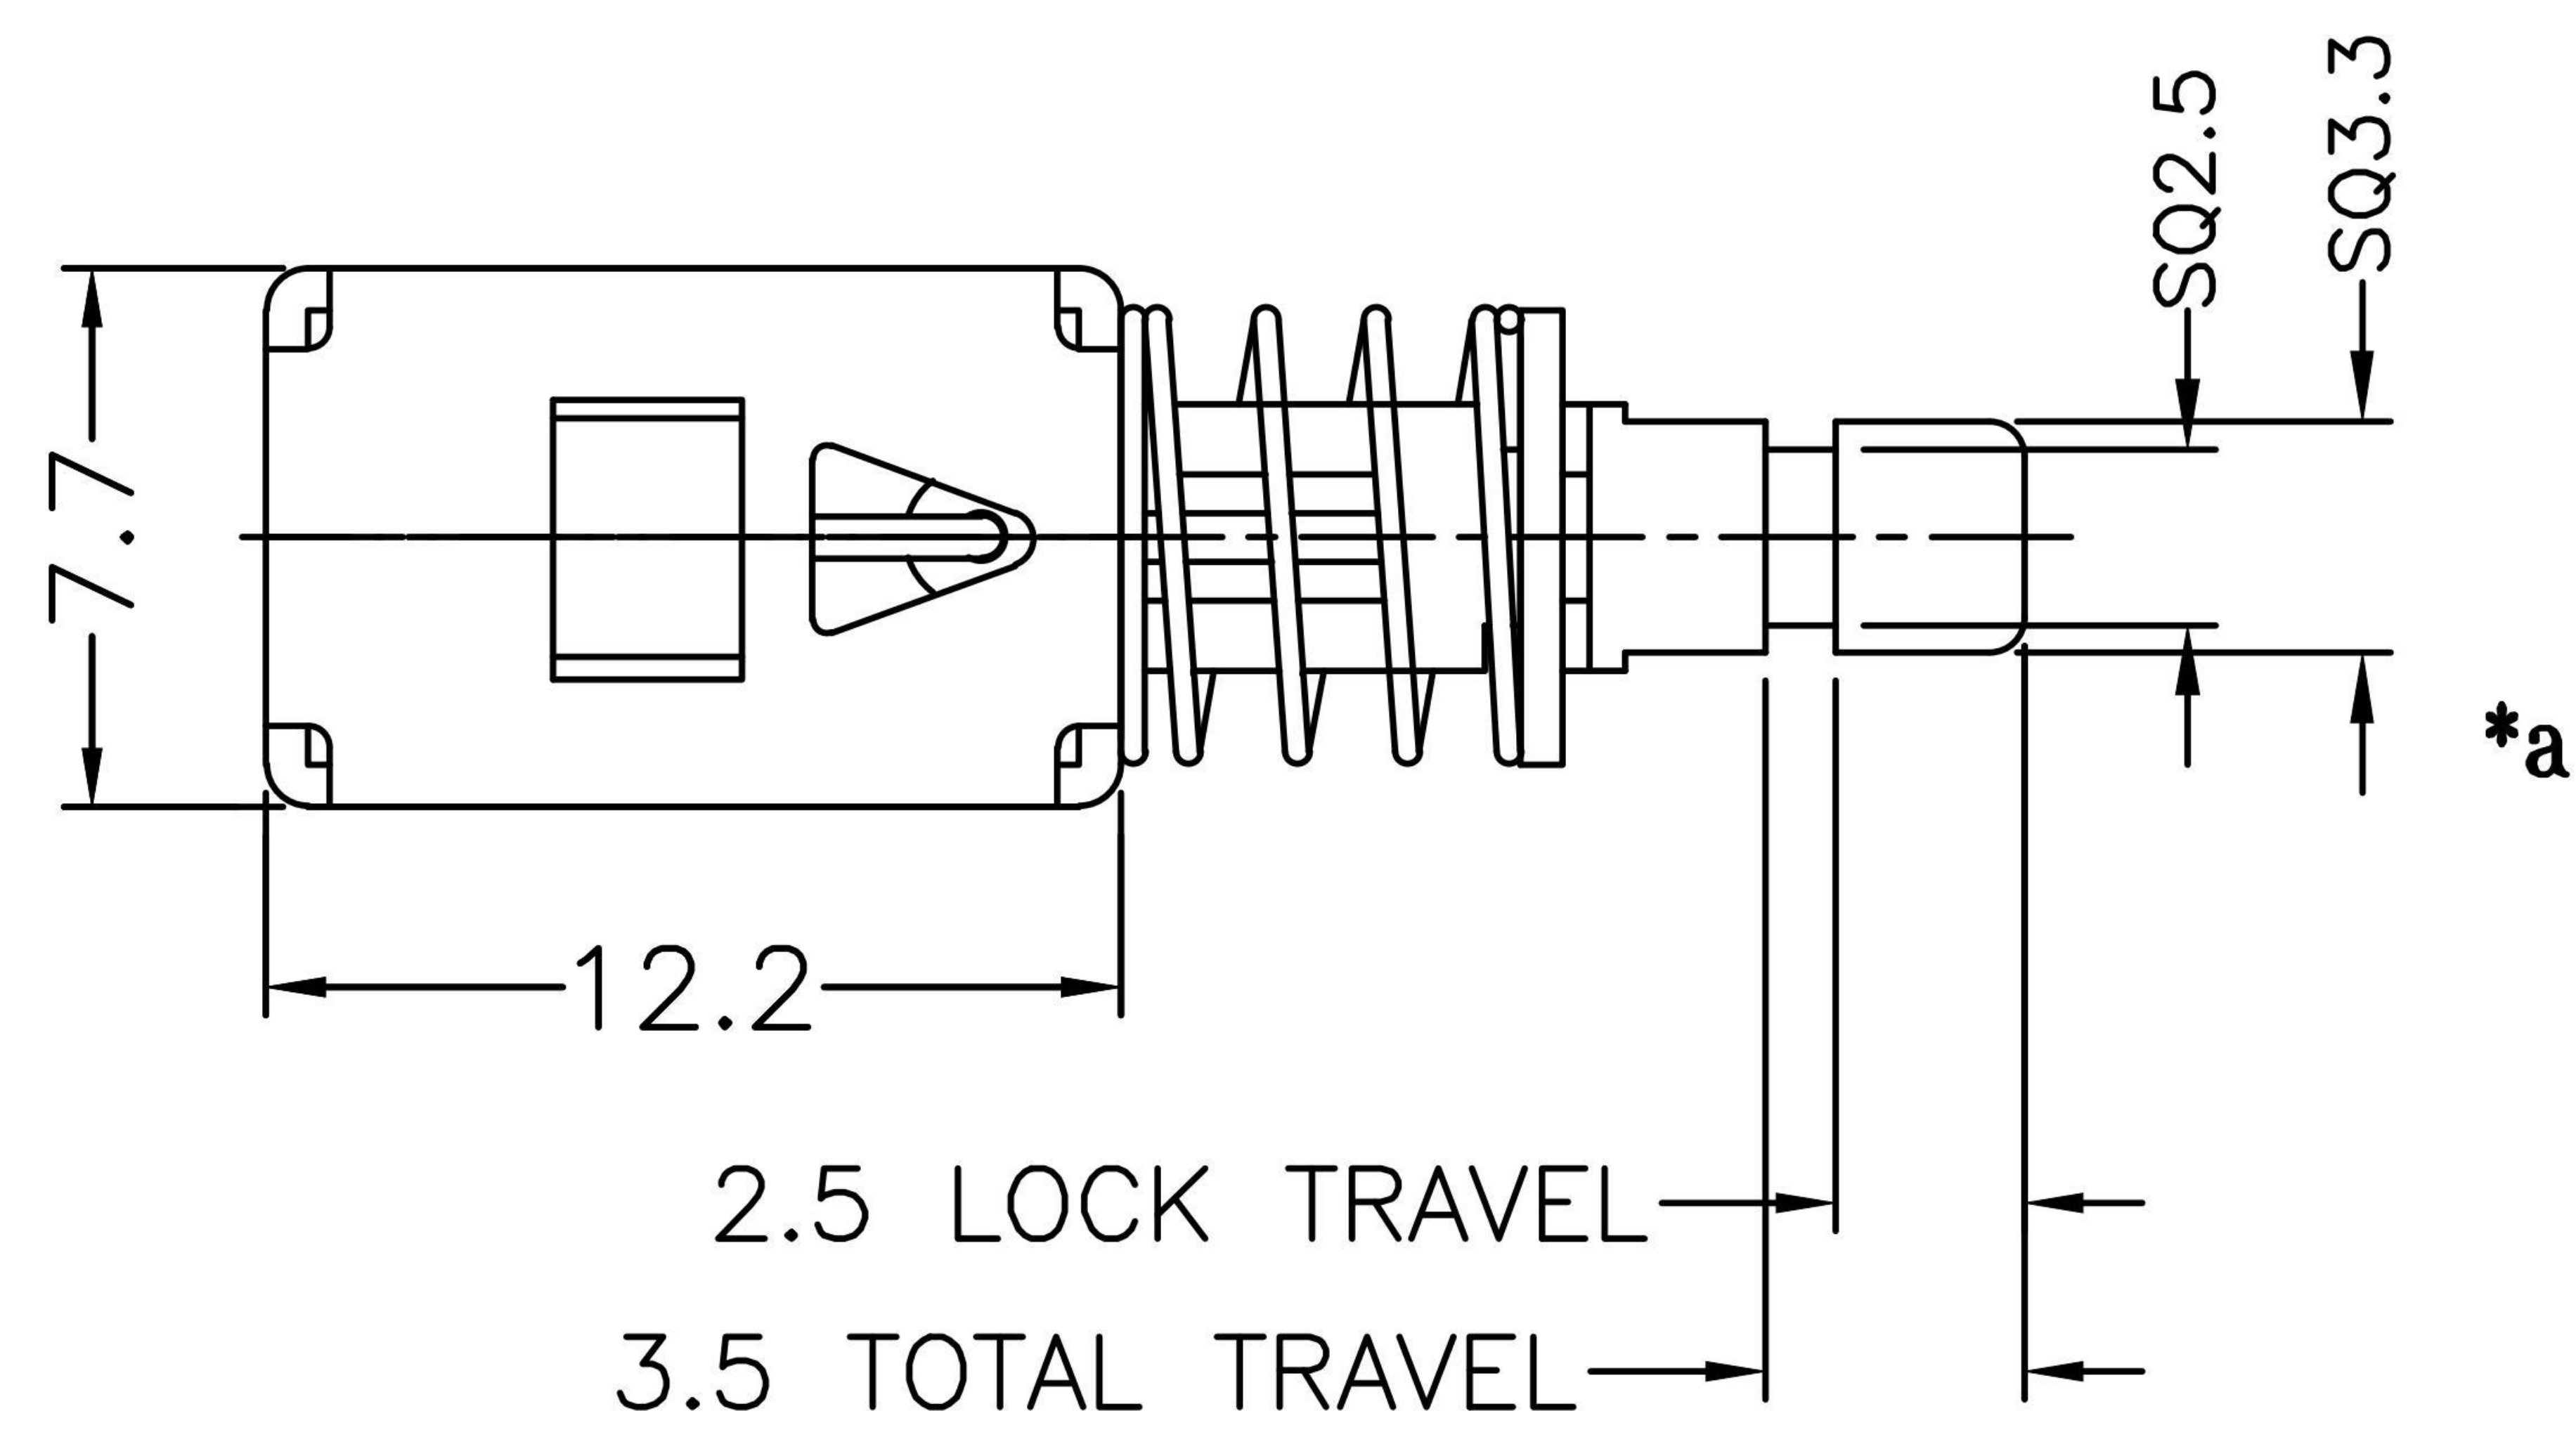



PS-22F02XX

PUSH SWITCH

G-Switch P/N

N=NO LOCK
L=LOCK




A=黑色
B=红色
C=蓝色
D=其它

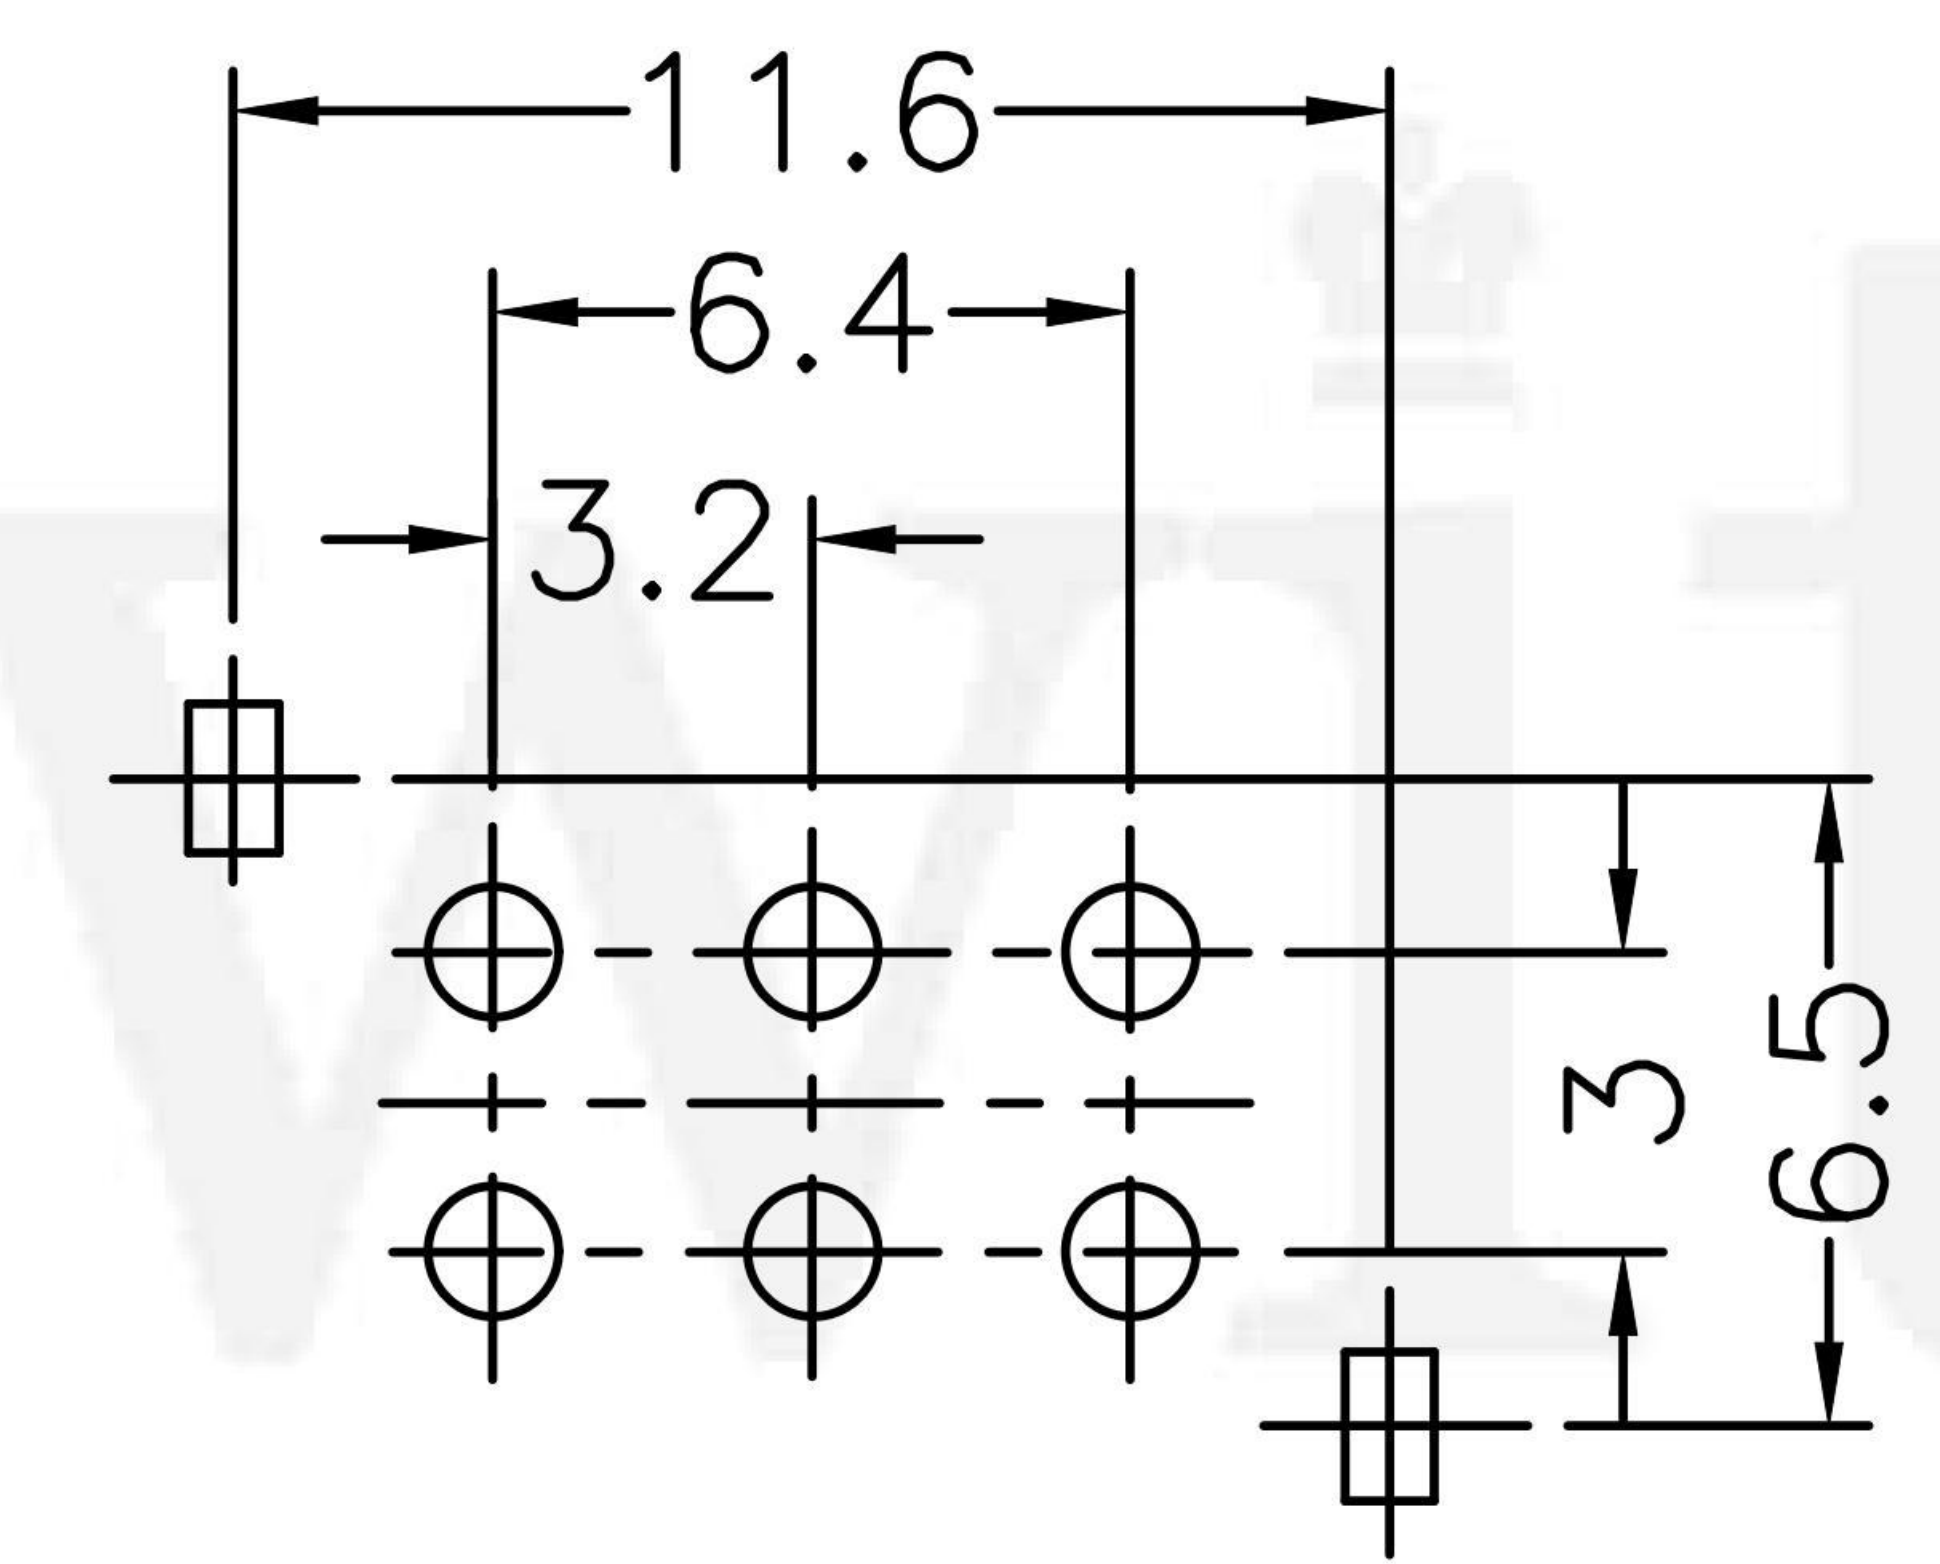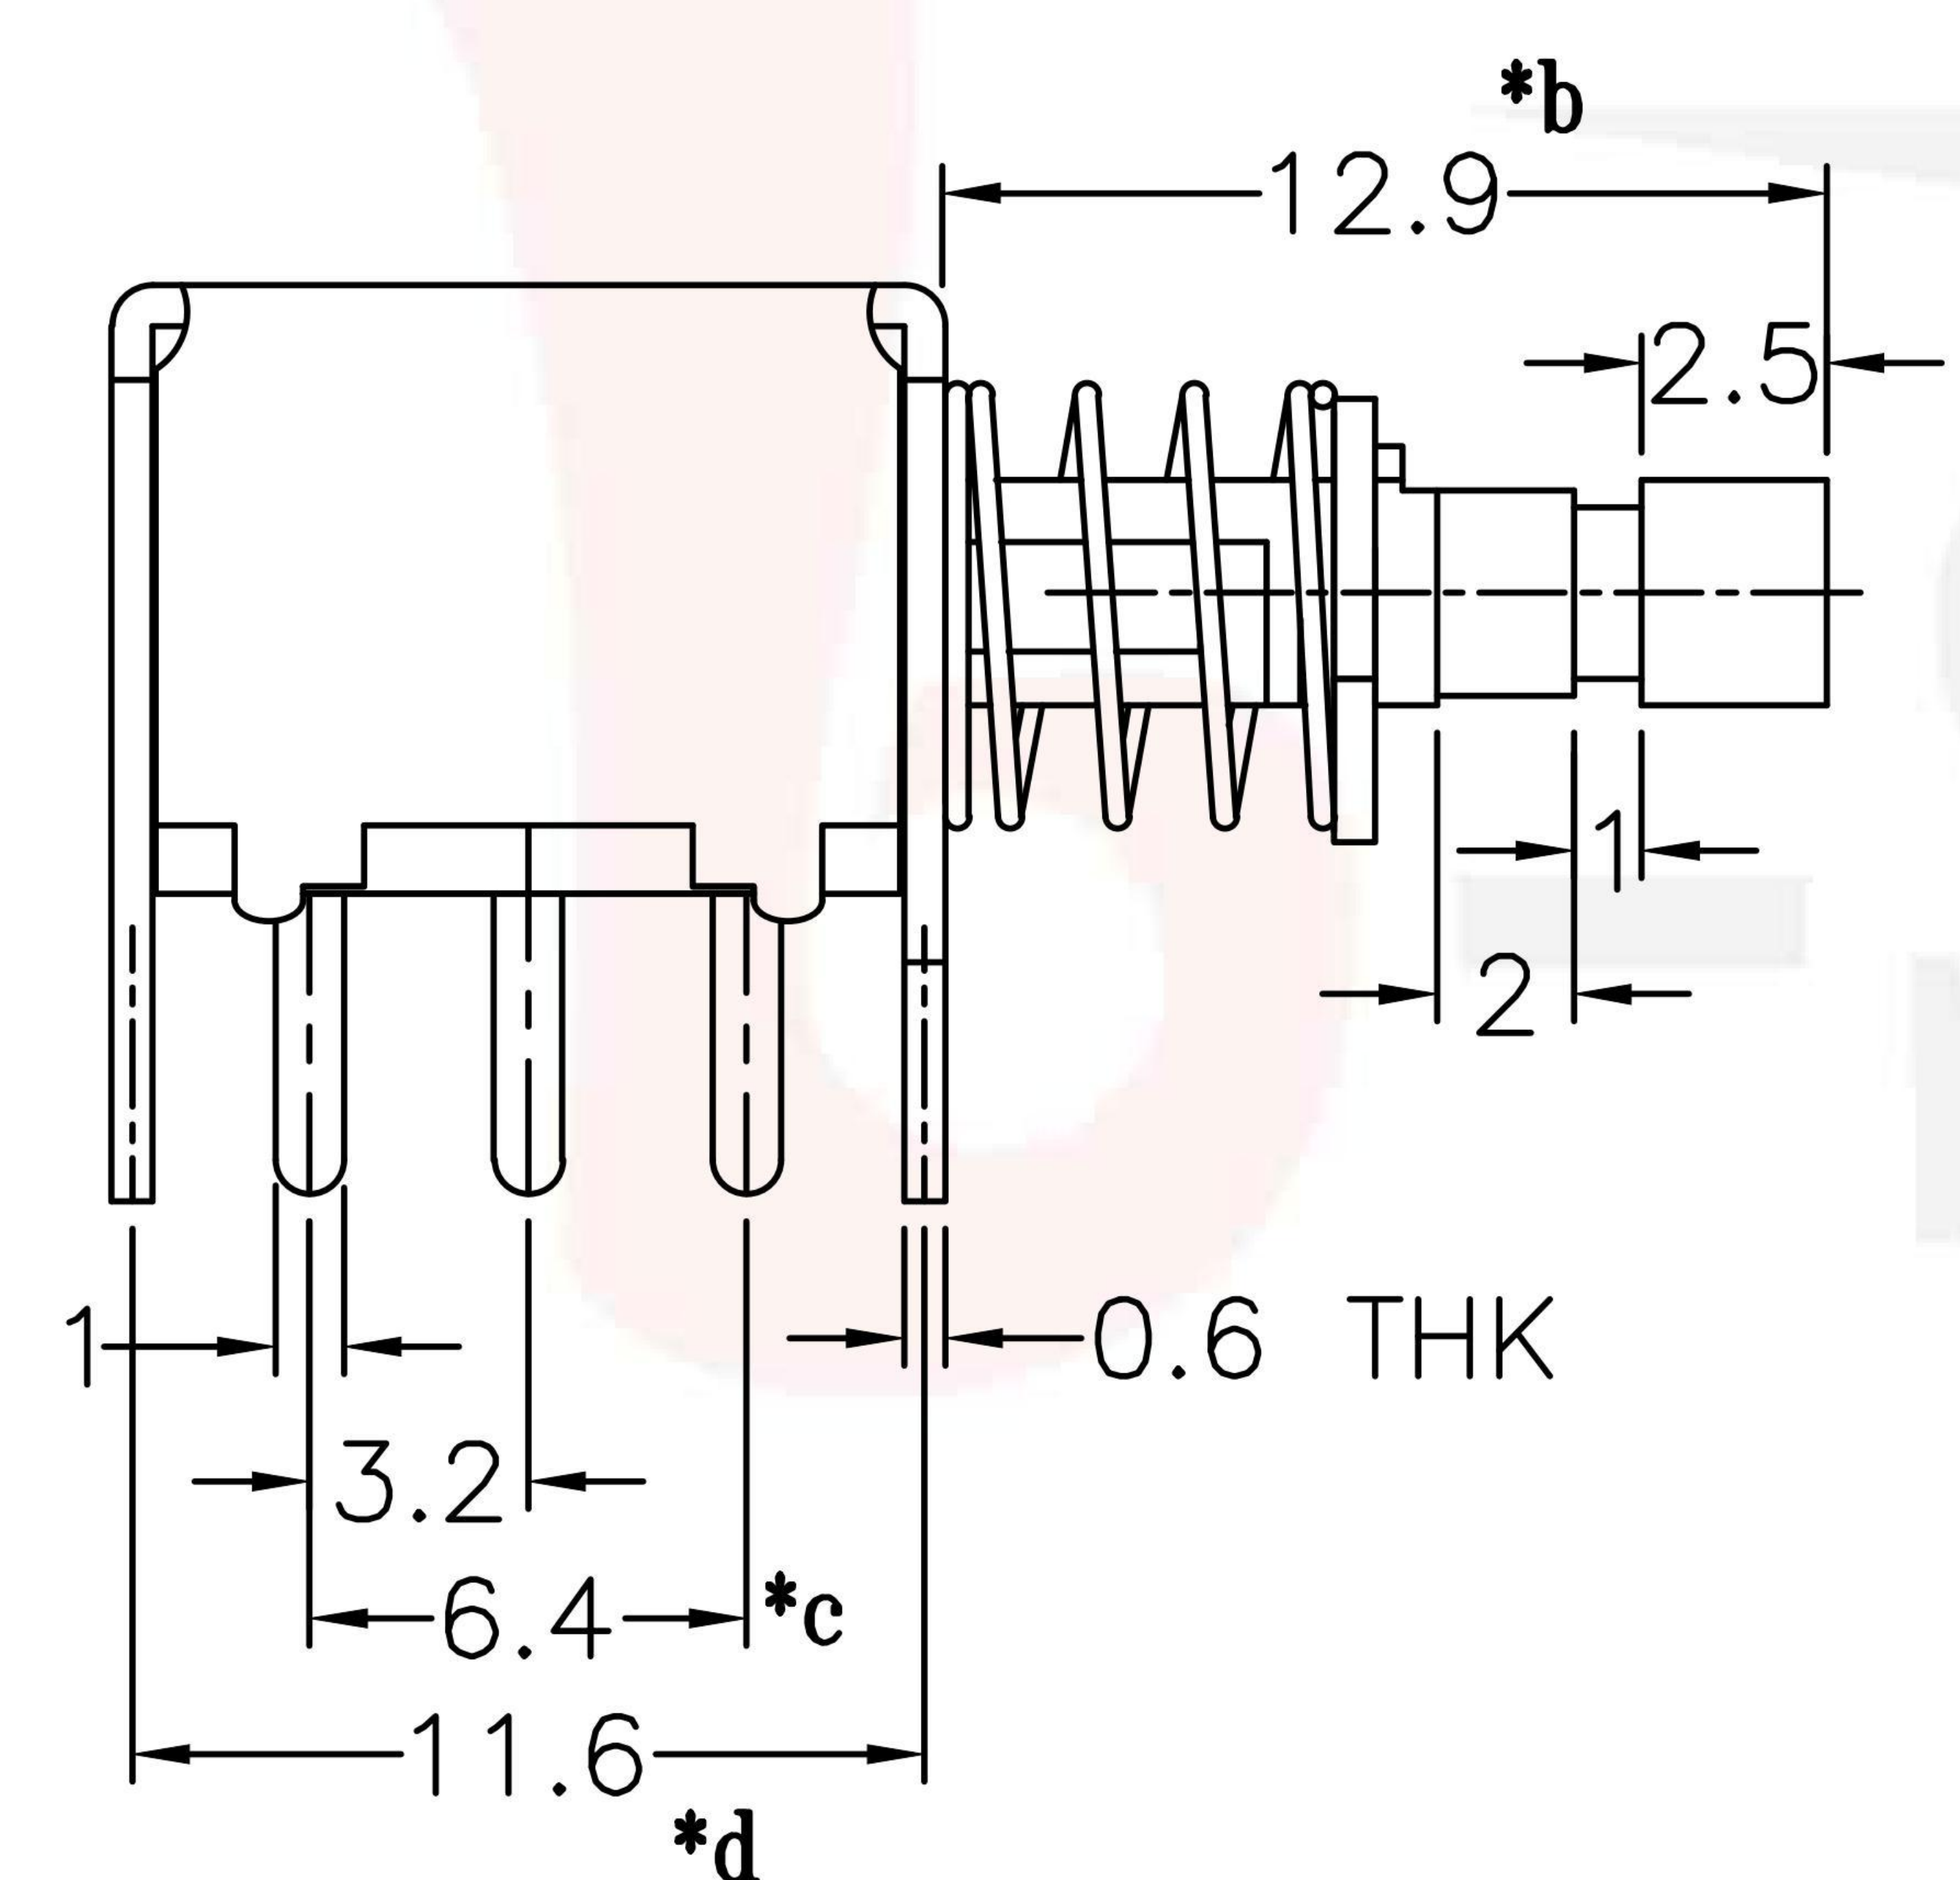

**P.C.B LAYOUT
BOTTOM VIEW**

G-Switch Specification:

Electrical Specifications: 0.5A 30VDC
Contact Resistance : $\leq 100m\Omega$
Insulation Resistance: $\geq 100M\Omega$ DC125V
Withstand Voltage: AC125V 1 minute
Operating Temperature: $-25^{\circ}C \sim +65^{\circ}C$
Storage Humidity: $\leq 85\%RH$
Electrical Life: 10,000
Mechanical Life: 100,000

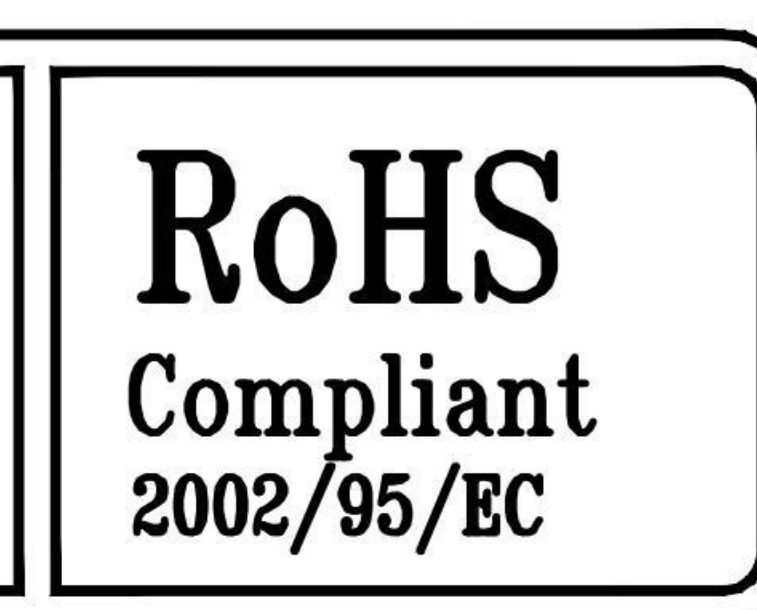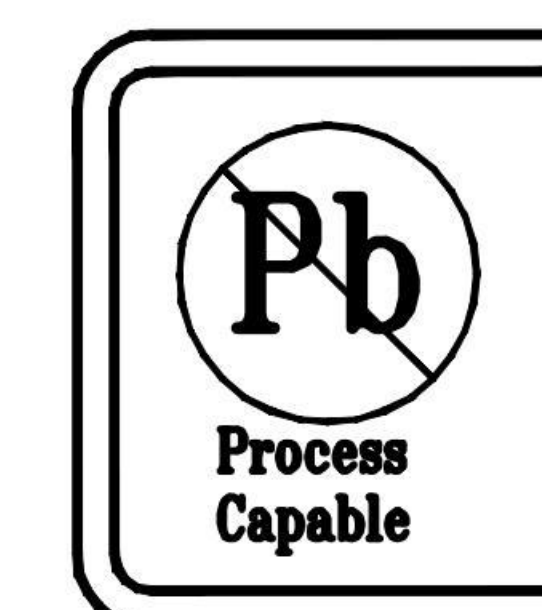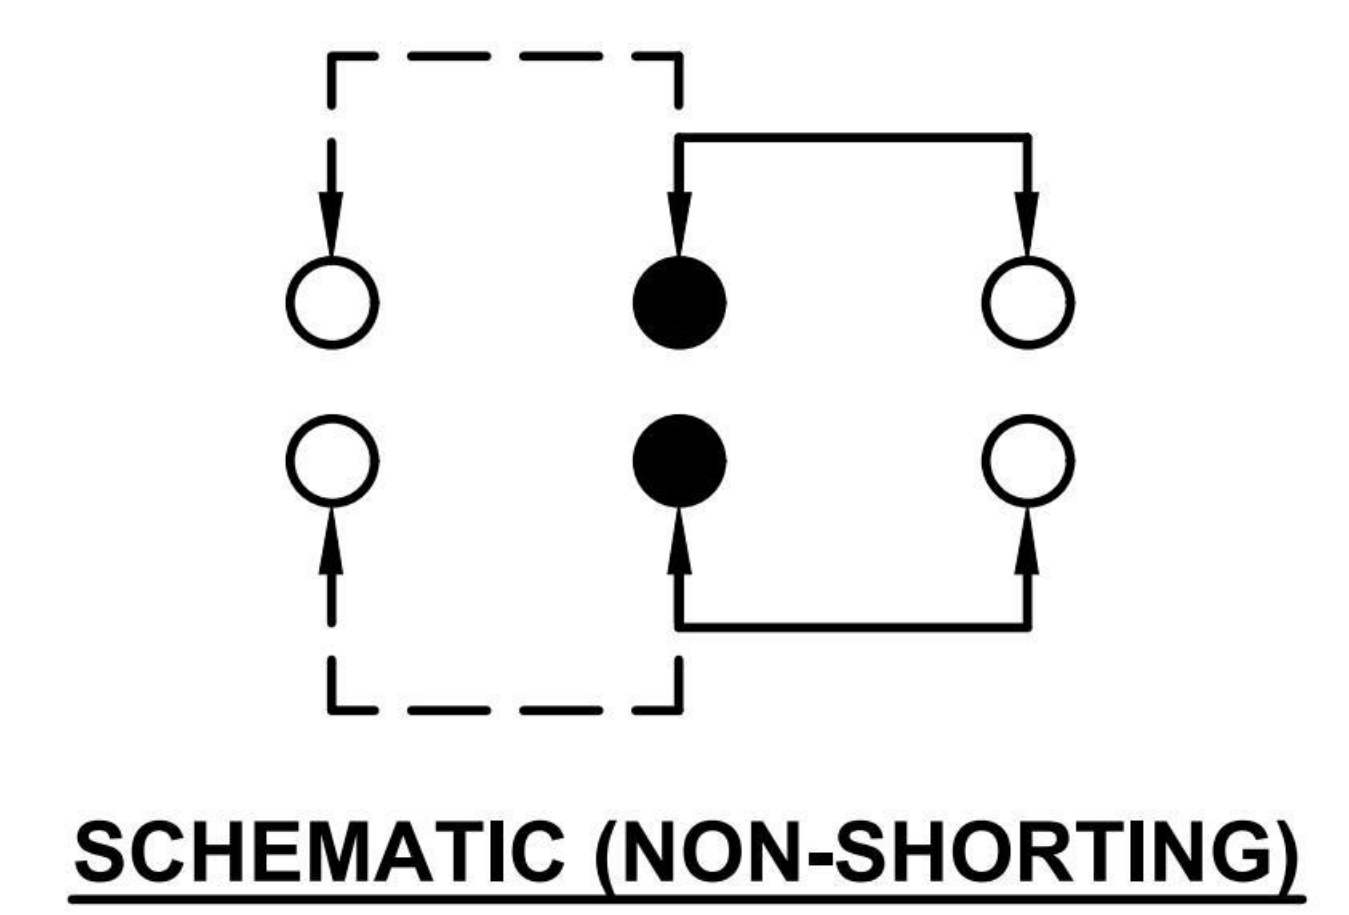

Unless otherwise specified, Tolerance:
X. ± 0.30
X.x ± 0.20
X.xx ± 0.15
X.xxx ± 0.10
Angles $\pm 3^{\circ}$

G-Switch Electronic (HongKong) CO.,Ltd.

DESIGN Yvette Chen	DATE 2019.05.29	Molde code:		
CHECKED	DATE	PS-22F02XX		
APPROVED	DATE			
http://www.dg-switch.com		REV.: X1	SCALE: 4:1	UNIT: mm
TEL:0769-82388879		SIZE: A4	SHEET: 1/1	