
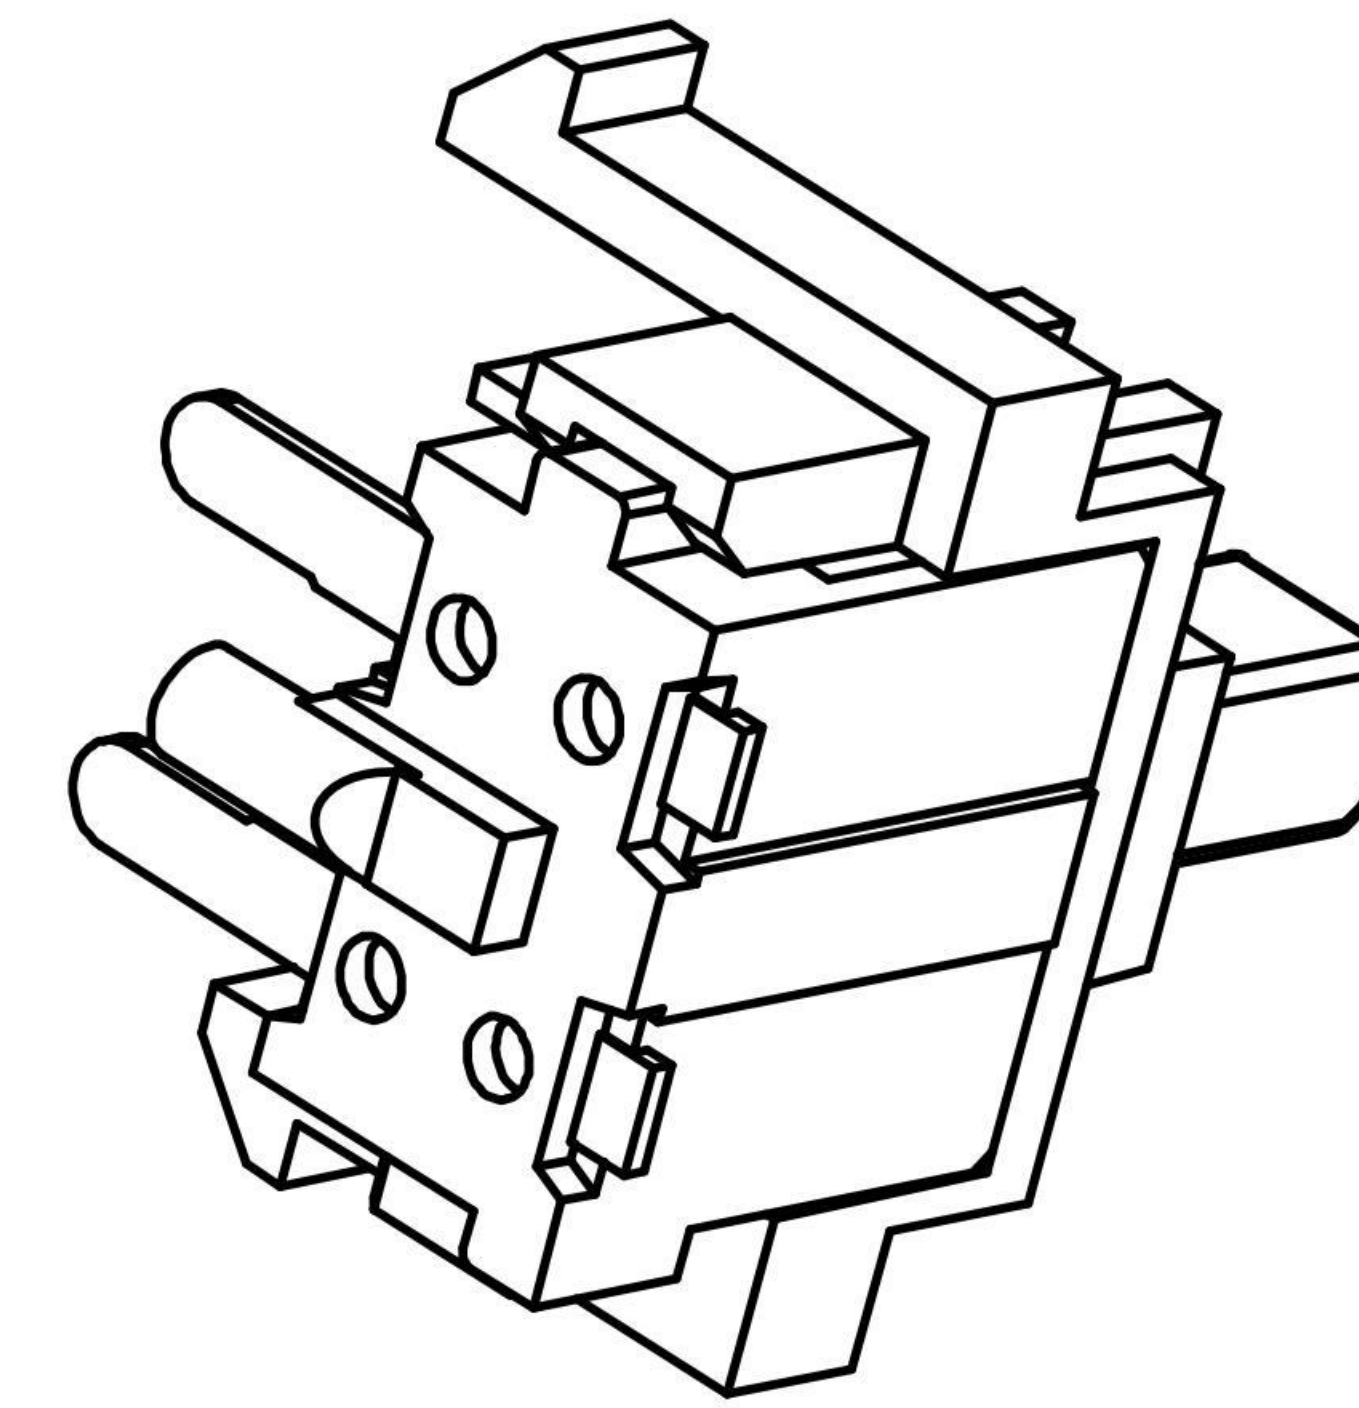
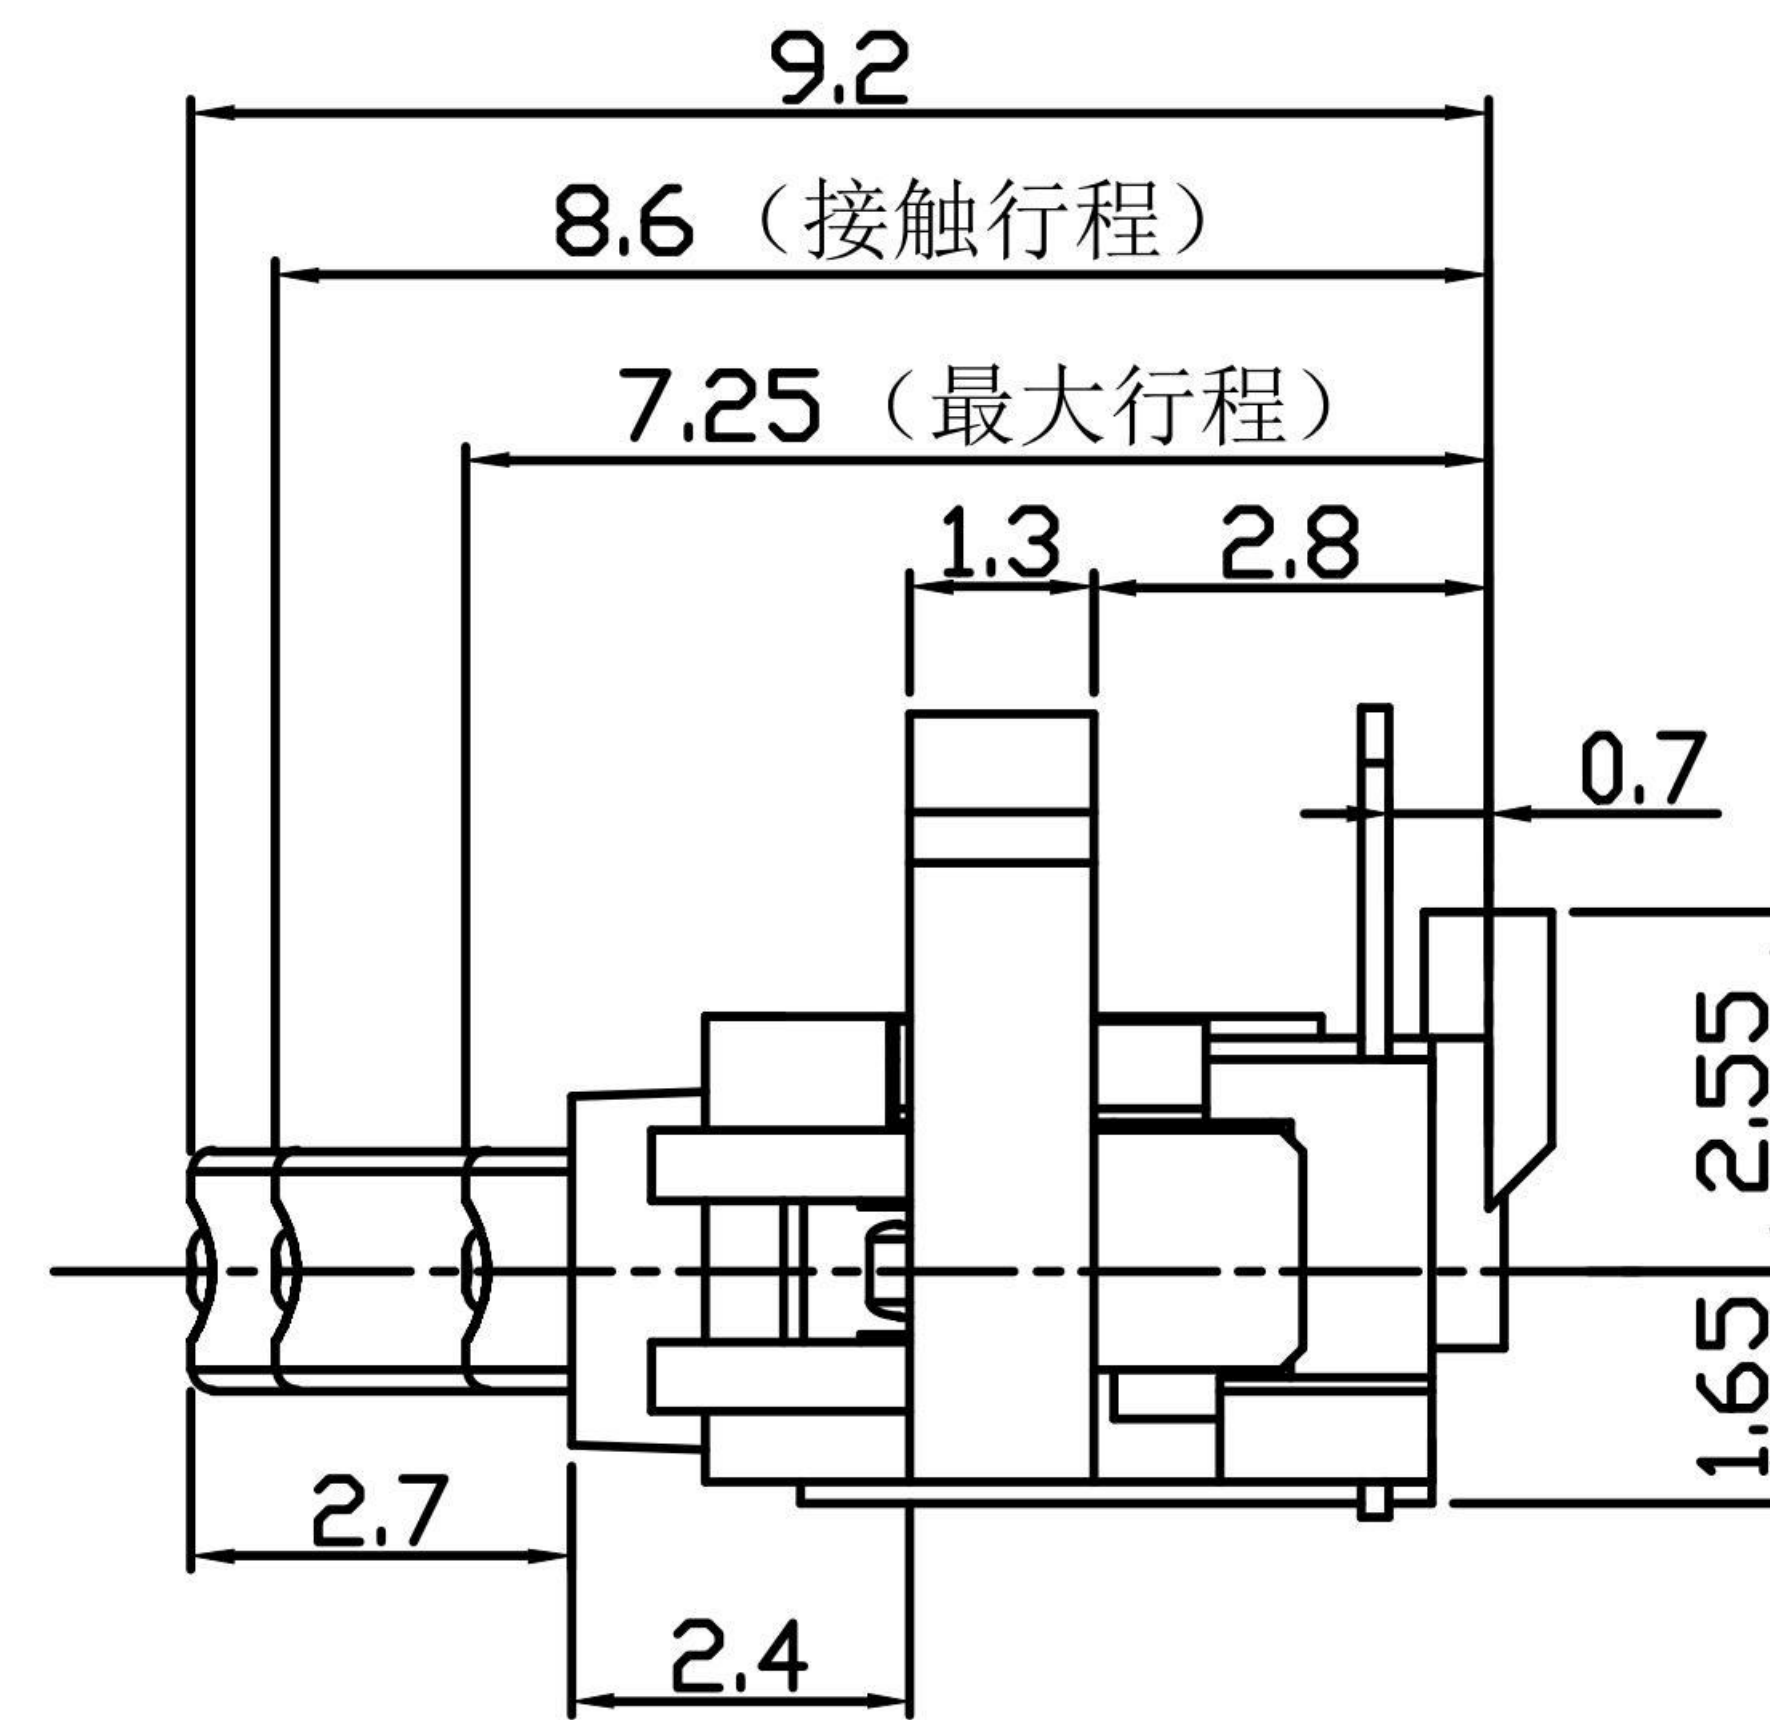


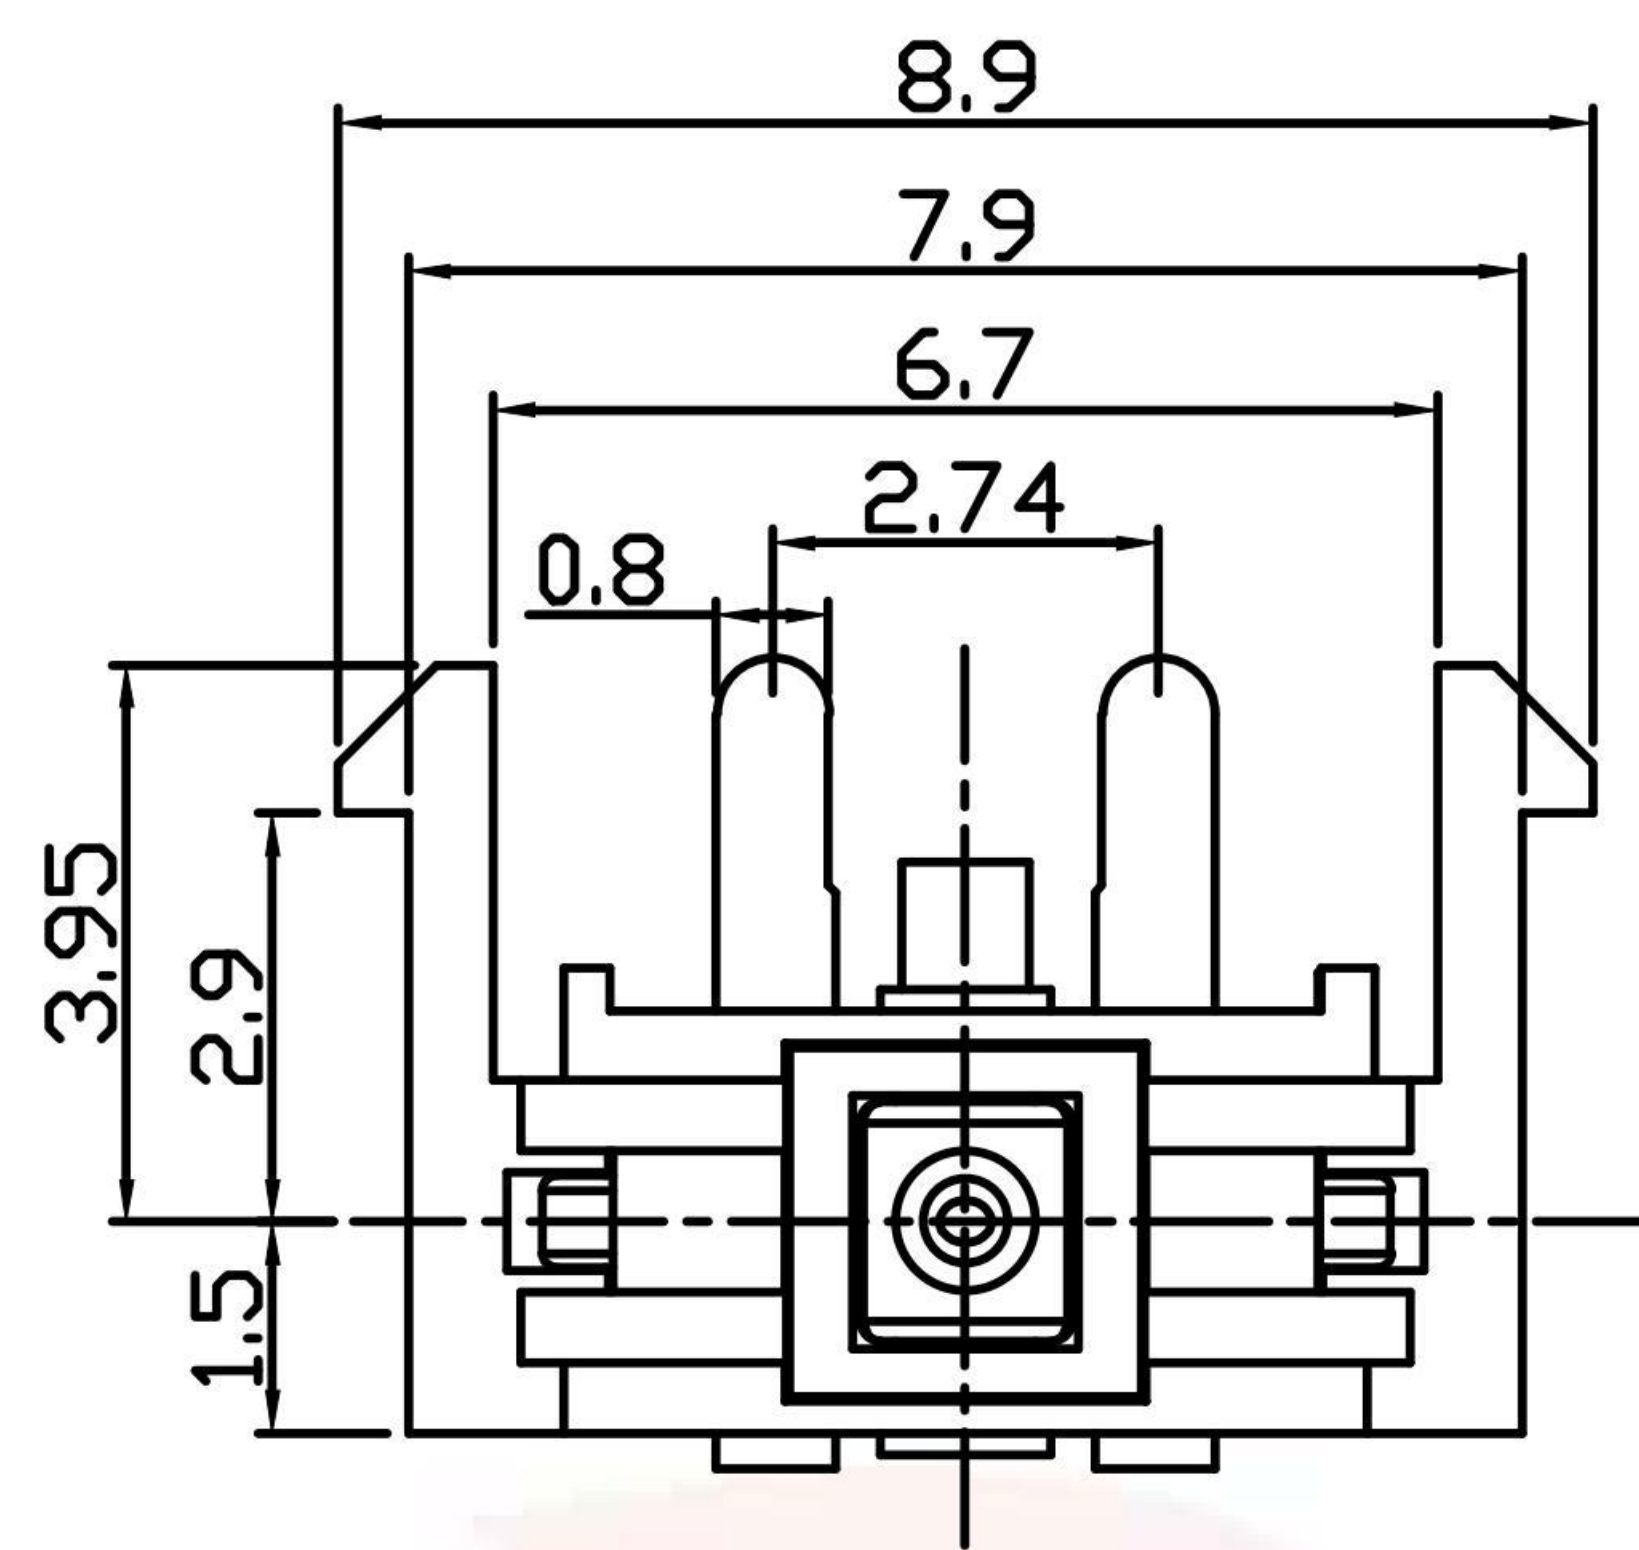



GT-MPU122-H088-L1

G-Switch


G-Switch P/N

H088=8.8mm

L1=100,000 Cycles

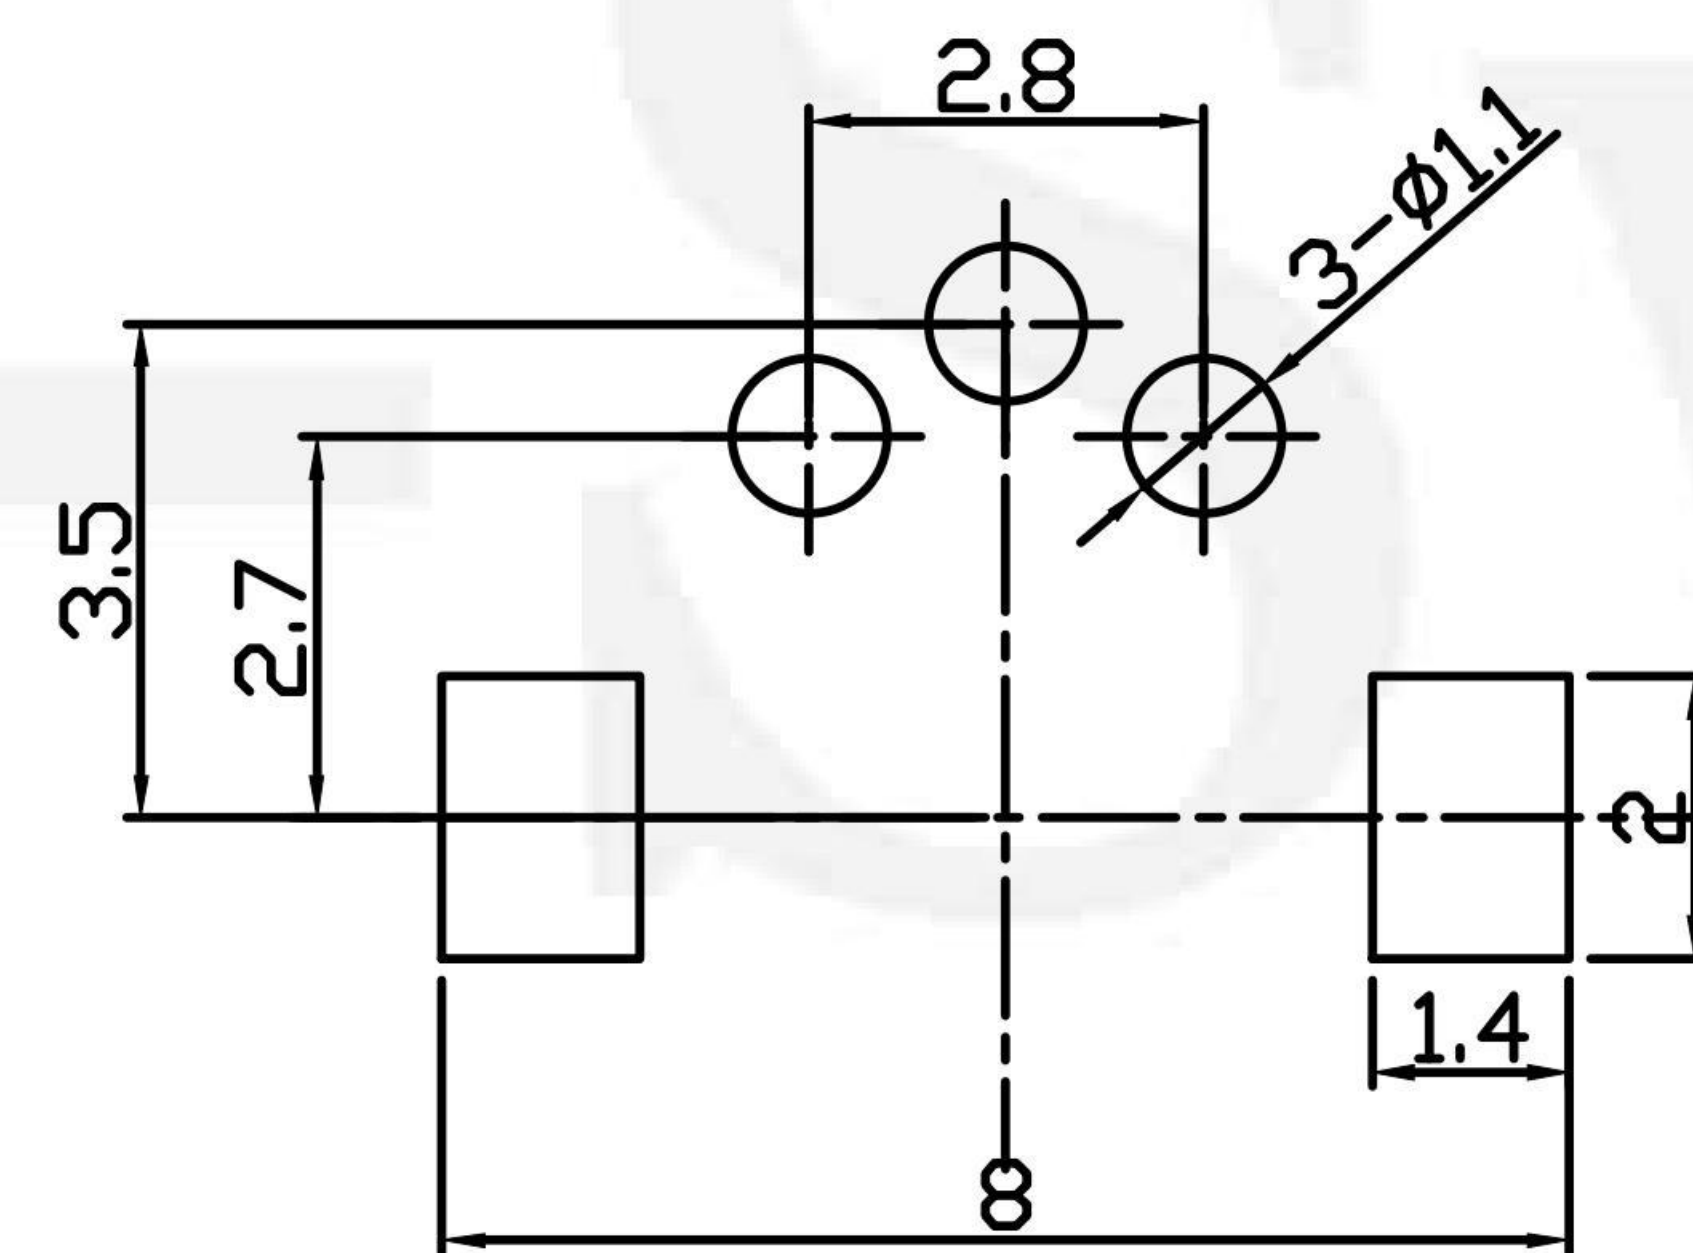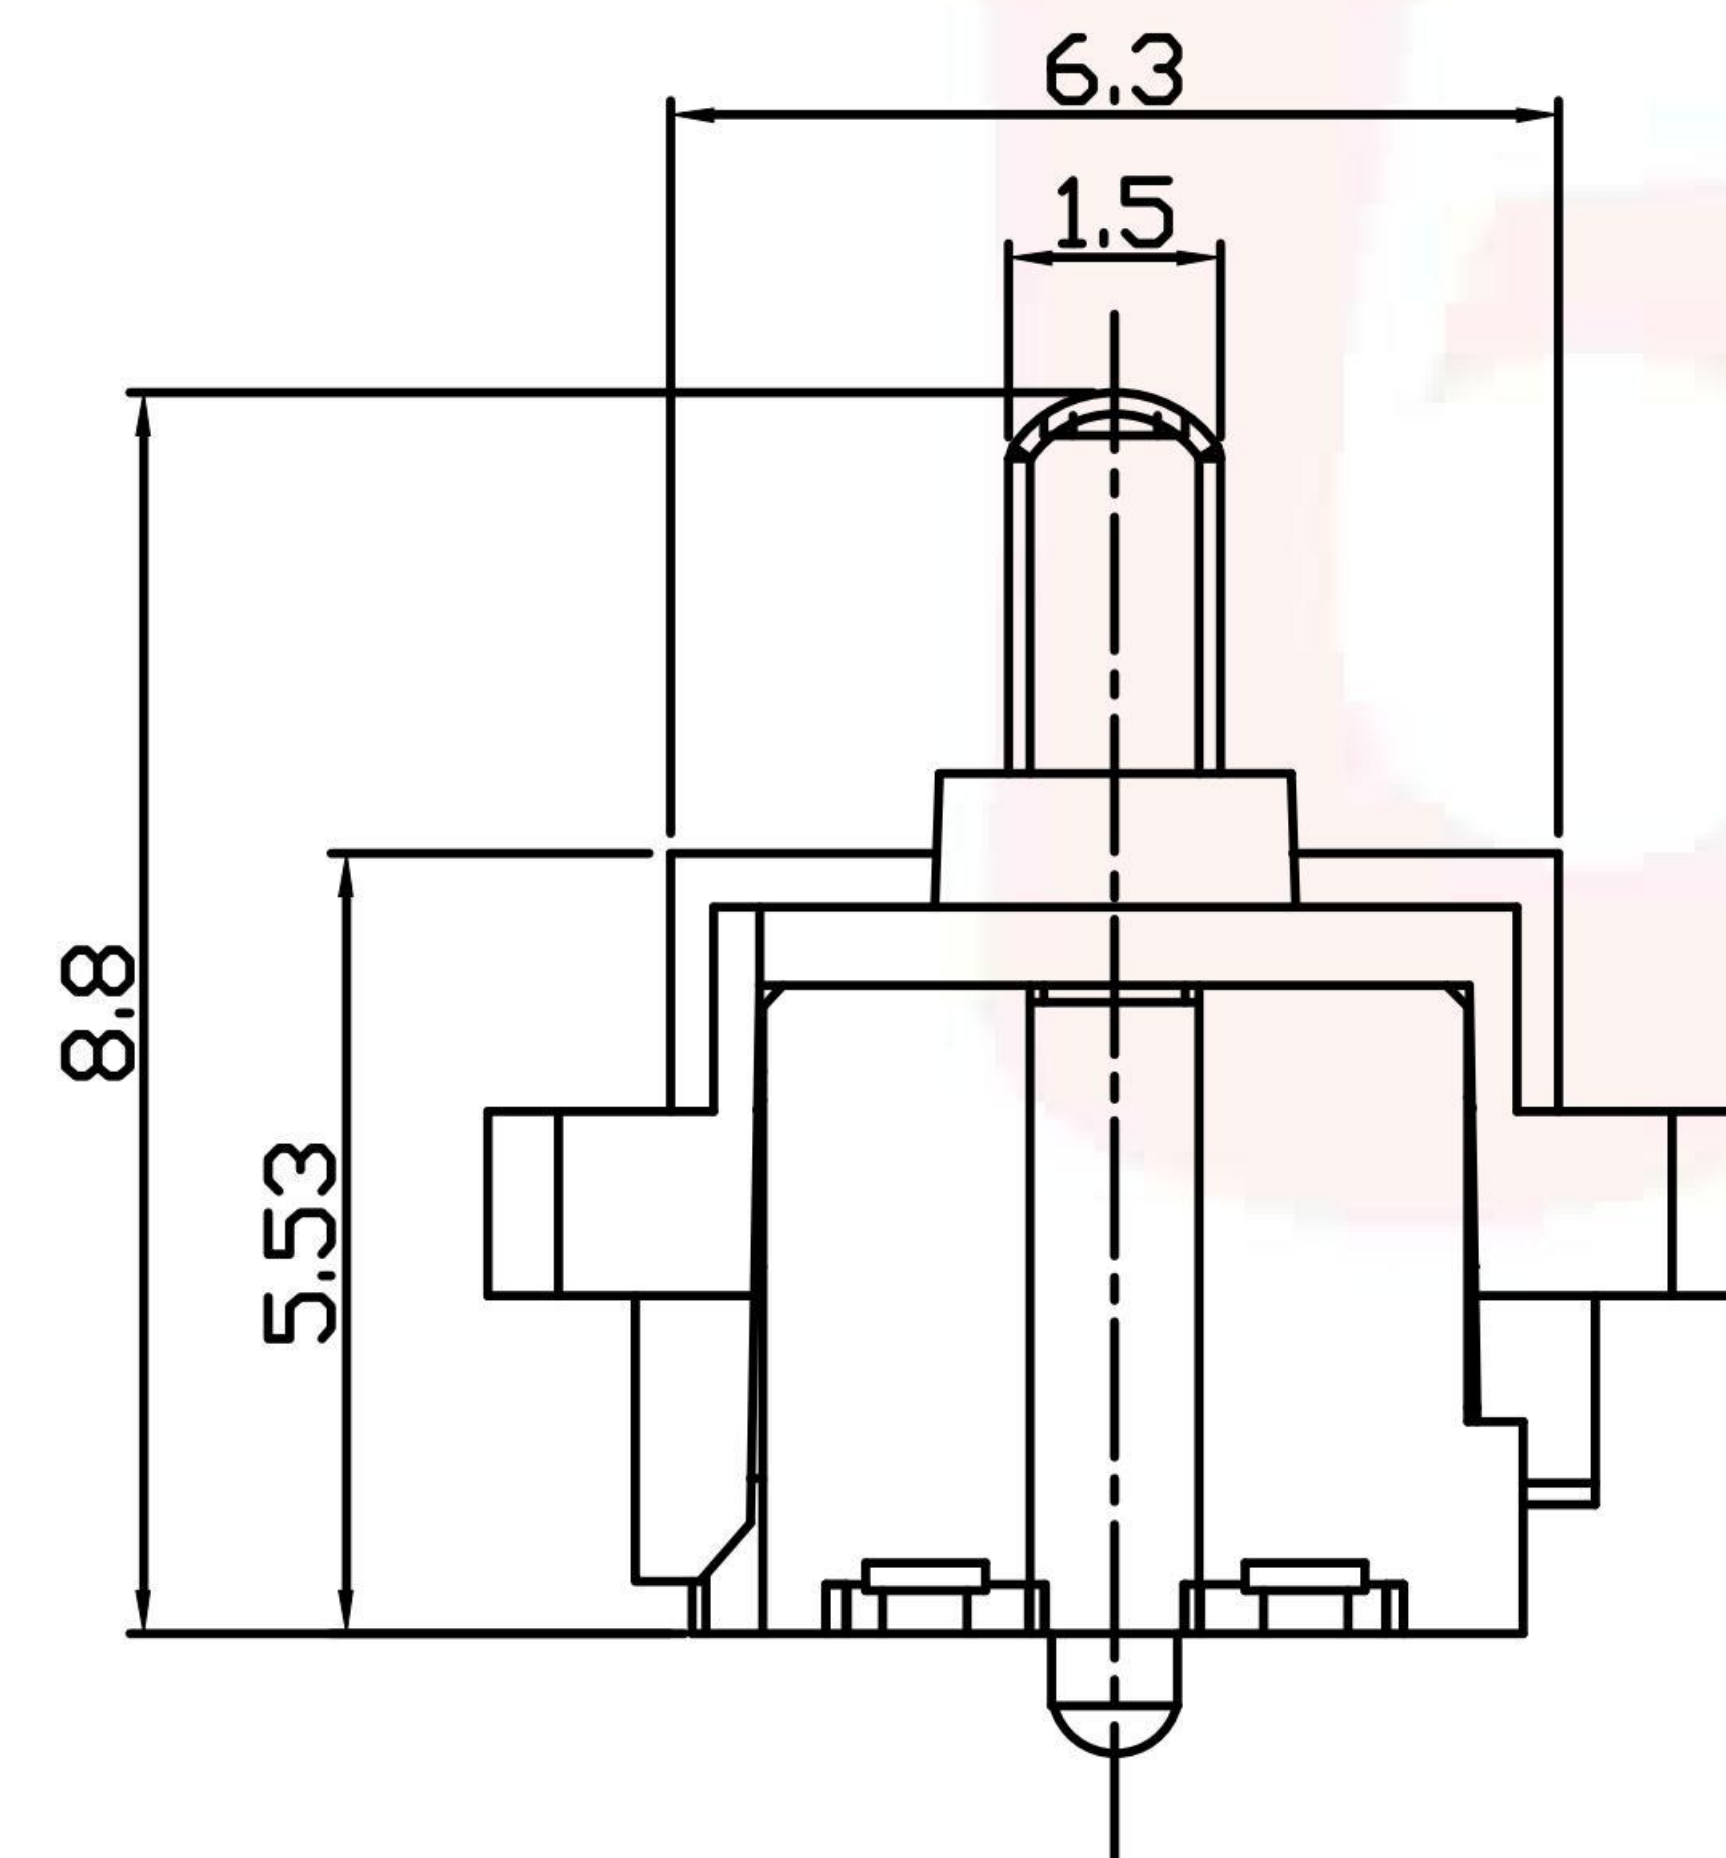


安装尺寸图

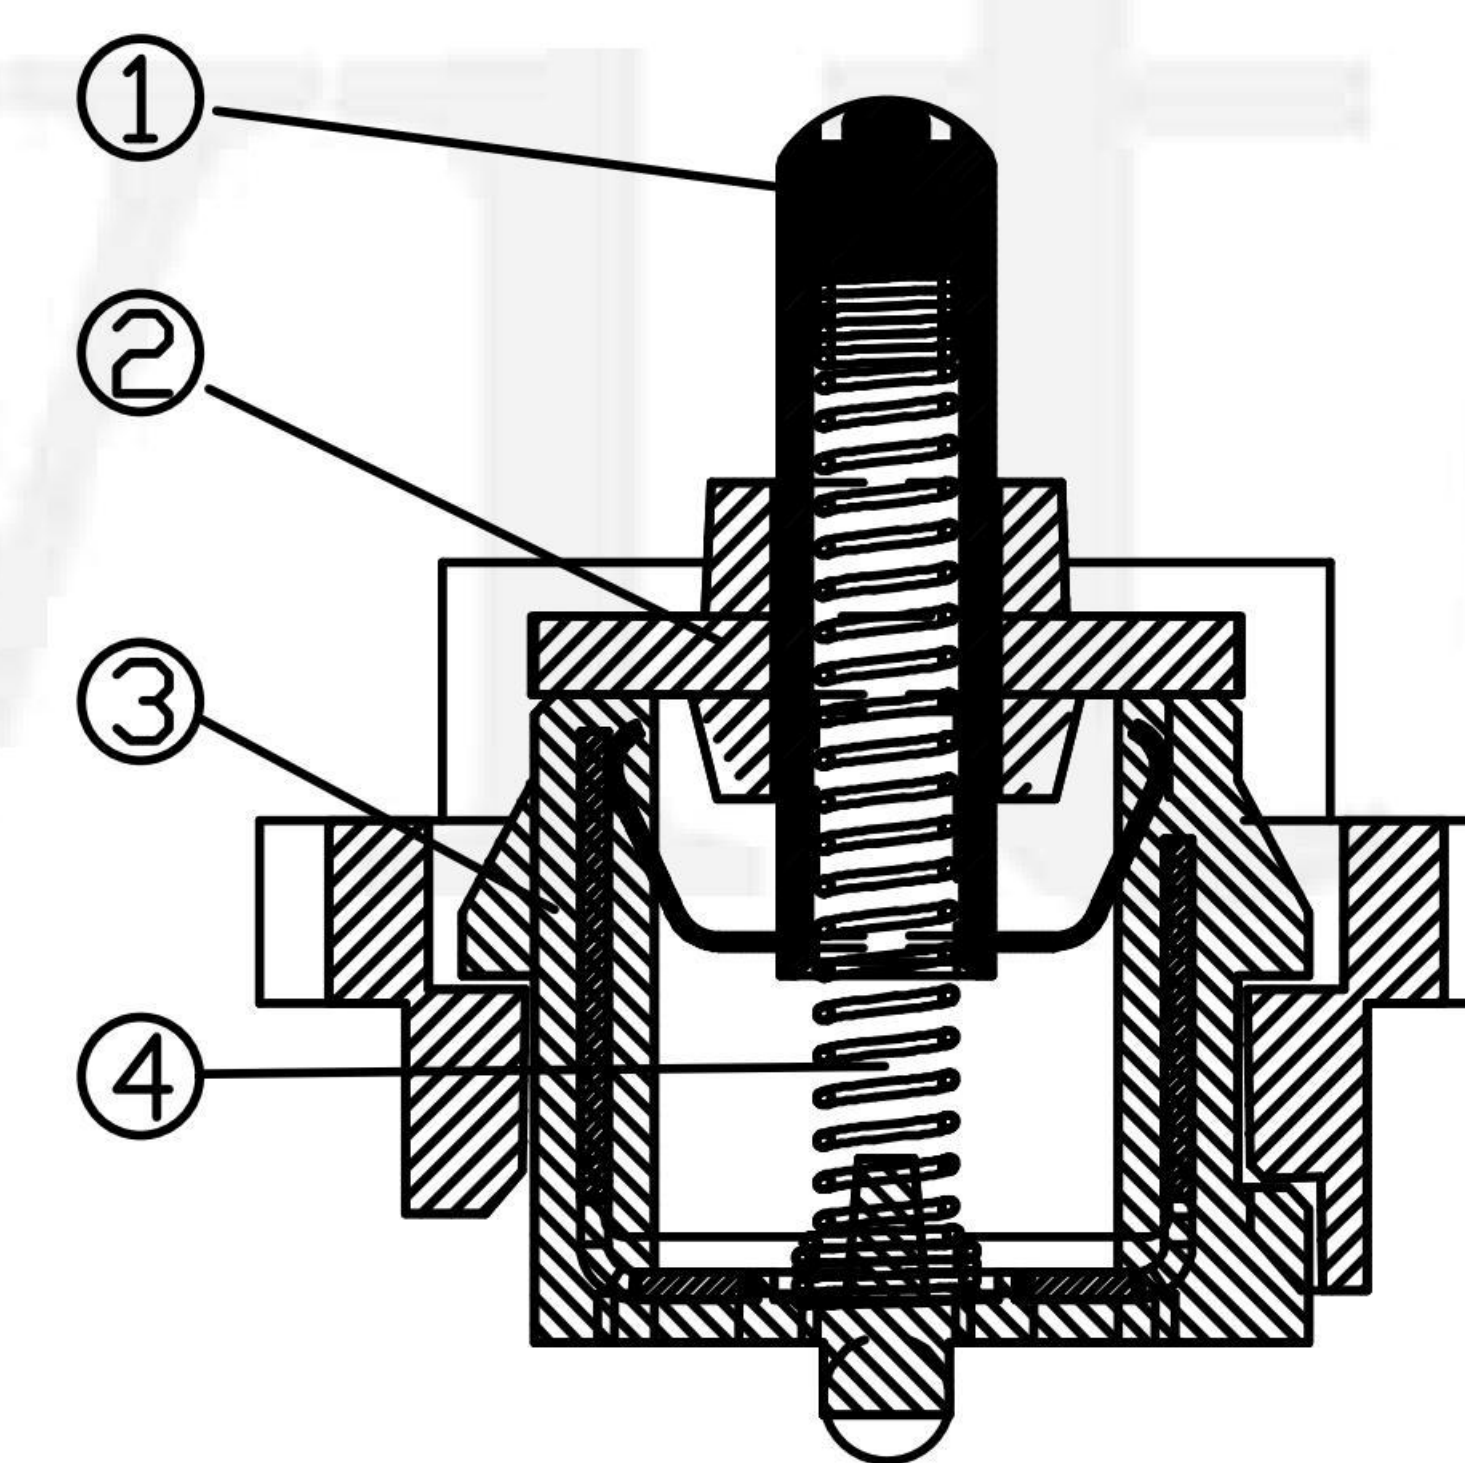

G-Switch Specification:

Electrical Specifications: 10mA 5V DC
Contact Resistance : 50mΩMAX
Insulation Resistance: 100MΩ min. 100V DC
Withstand Voltage: 100V AC/1 min
Operating Temperature: -10°C~+60°C
Storage Temperature: -40°C~+70°C
Operating Life: 100,000 cycles

4	SPRING	SUS	1	
3	CASE	PA66/BRASS	1	BLACK/AG-PLATED
2	COAT	POM	1	BLACK
1	BUTTON	POM/PHOSPHOR BRONZE	1	BLACK/AG-PLATED
NO.	PART NAME	MATERIAL	QTY	FINISHING

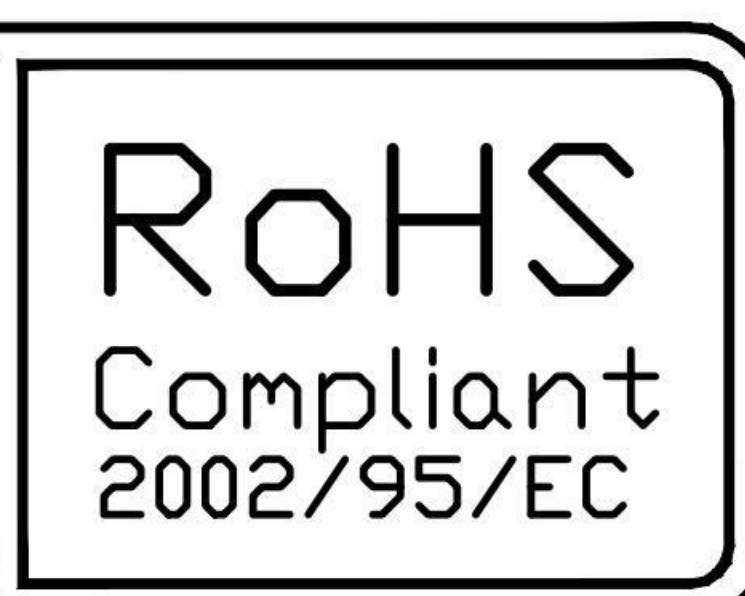

Unless otherwise specified, Tolerance:
X. ±0.30
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
Angles ±3°

G-Switch Electronic (HongKong) CO.,Ltd.

DESIGN Yvette Chen	DATE 2019.05.29	Molde code:		
CHECKED	DATE	GT-MPU122-H088-L1		
APPROVED	DATE			
http://www.dg-switch.com		REV.: X1	SCALE: 4:1	UNIT: mm
TEL:0769-82388879		SIZE: A4	SHEET: 1/1	