
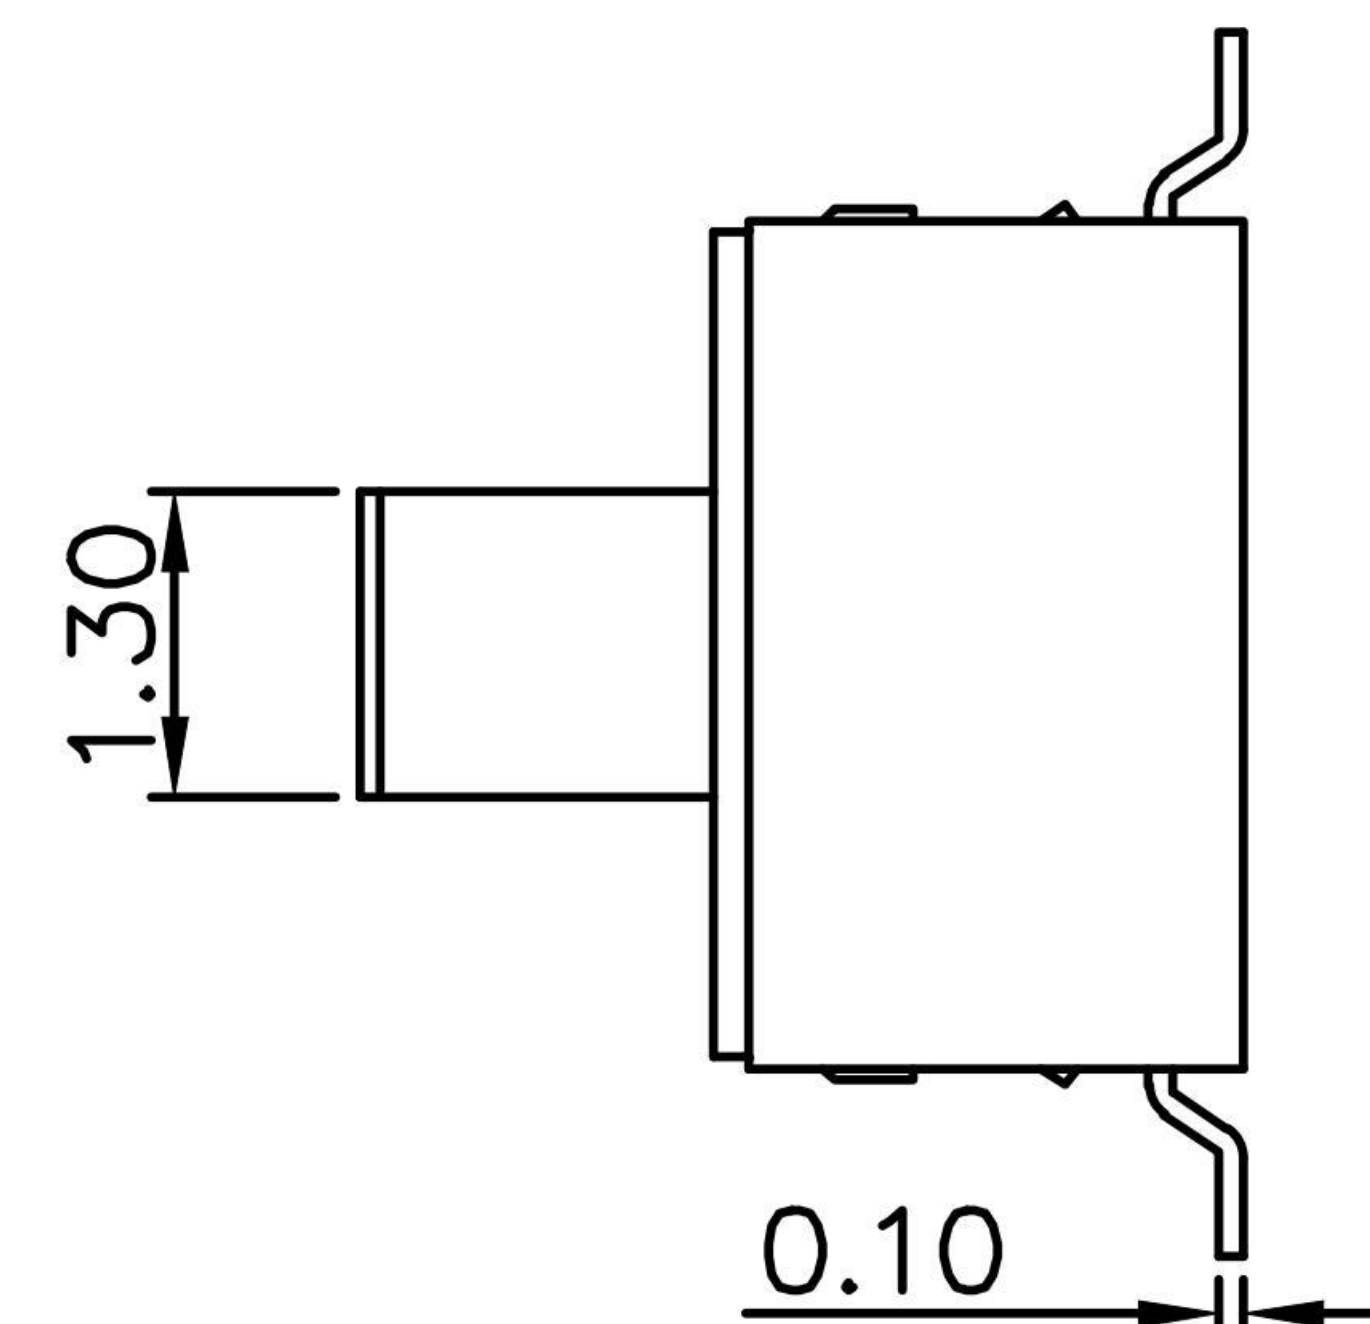
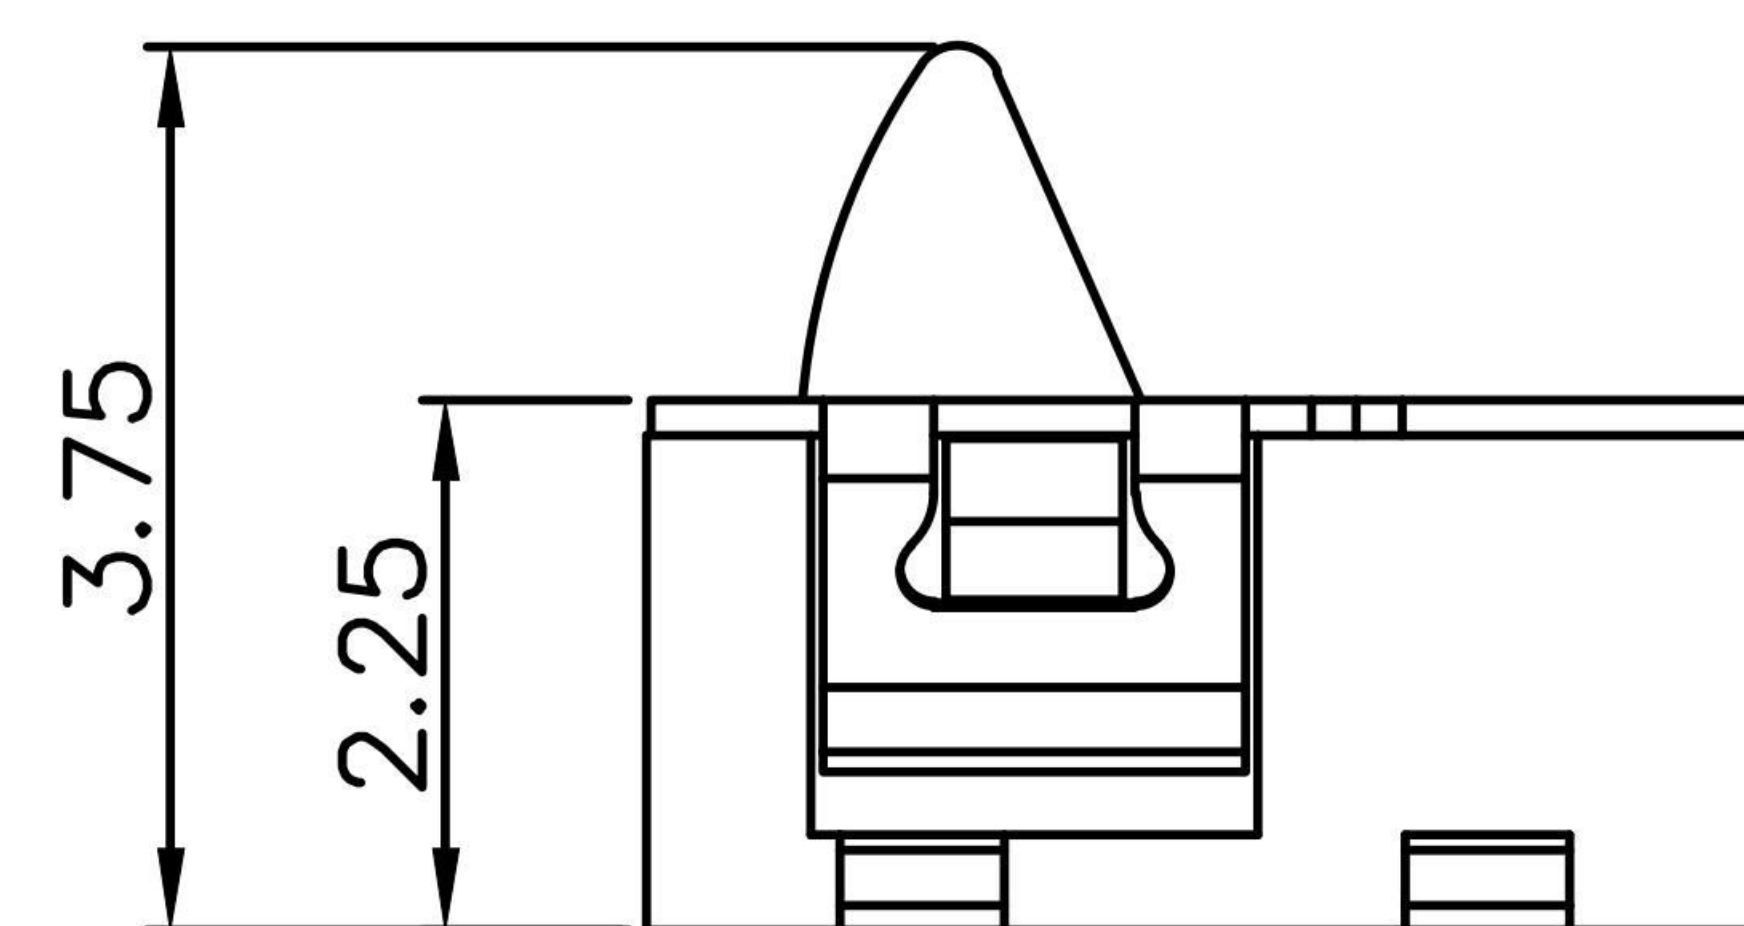


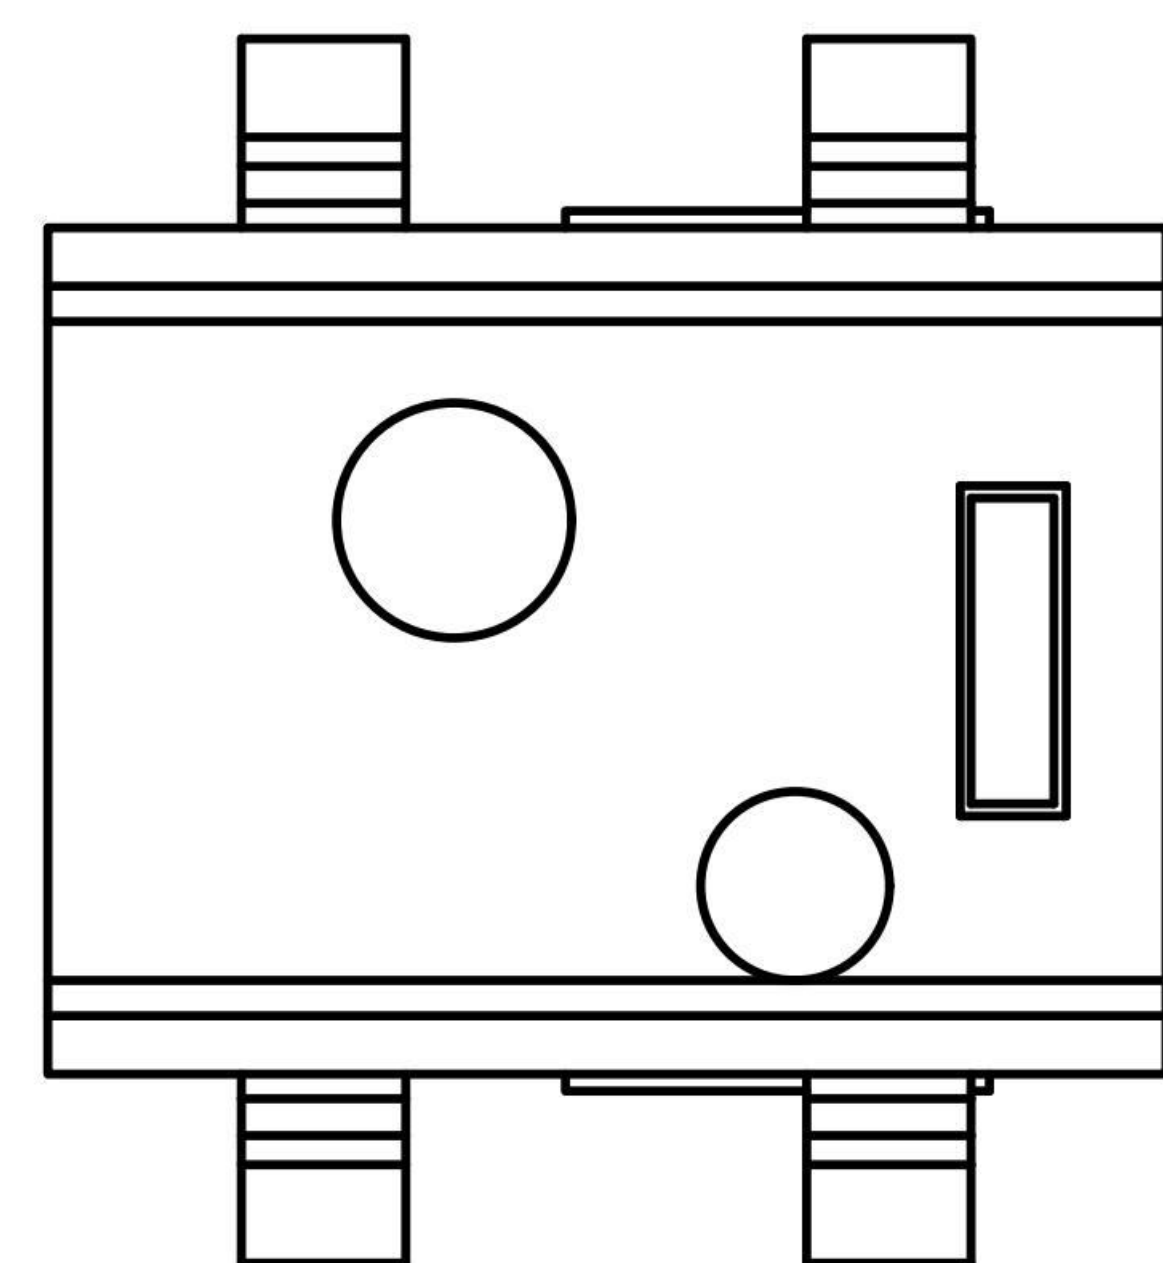

GT-MPU215-H375-LXX



G-Switch

G-Switch P/N

H065=6.5mm

N=Non Pilot
A=Base With Pilot


L05=50,000 Cycles
L1=100,000 Cycles

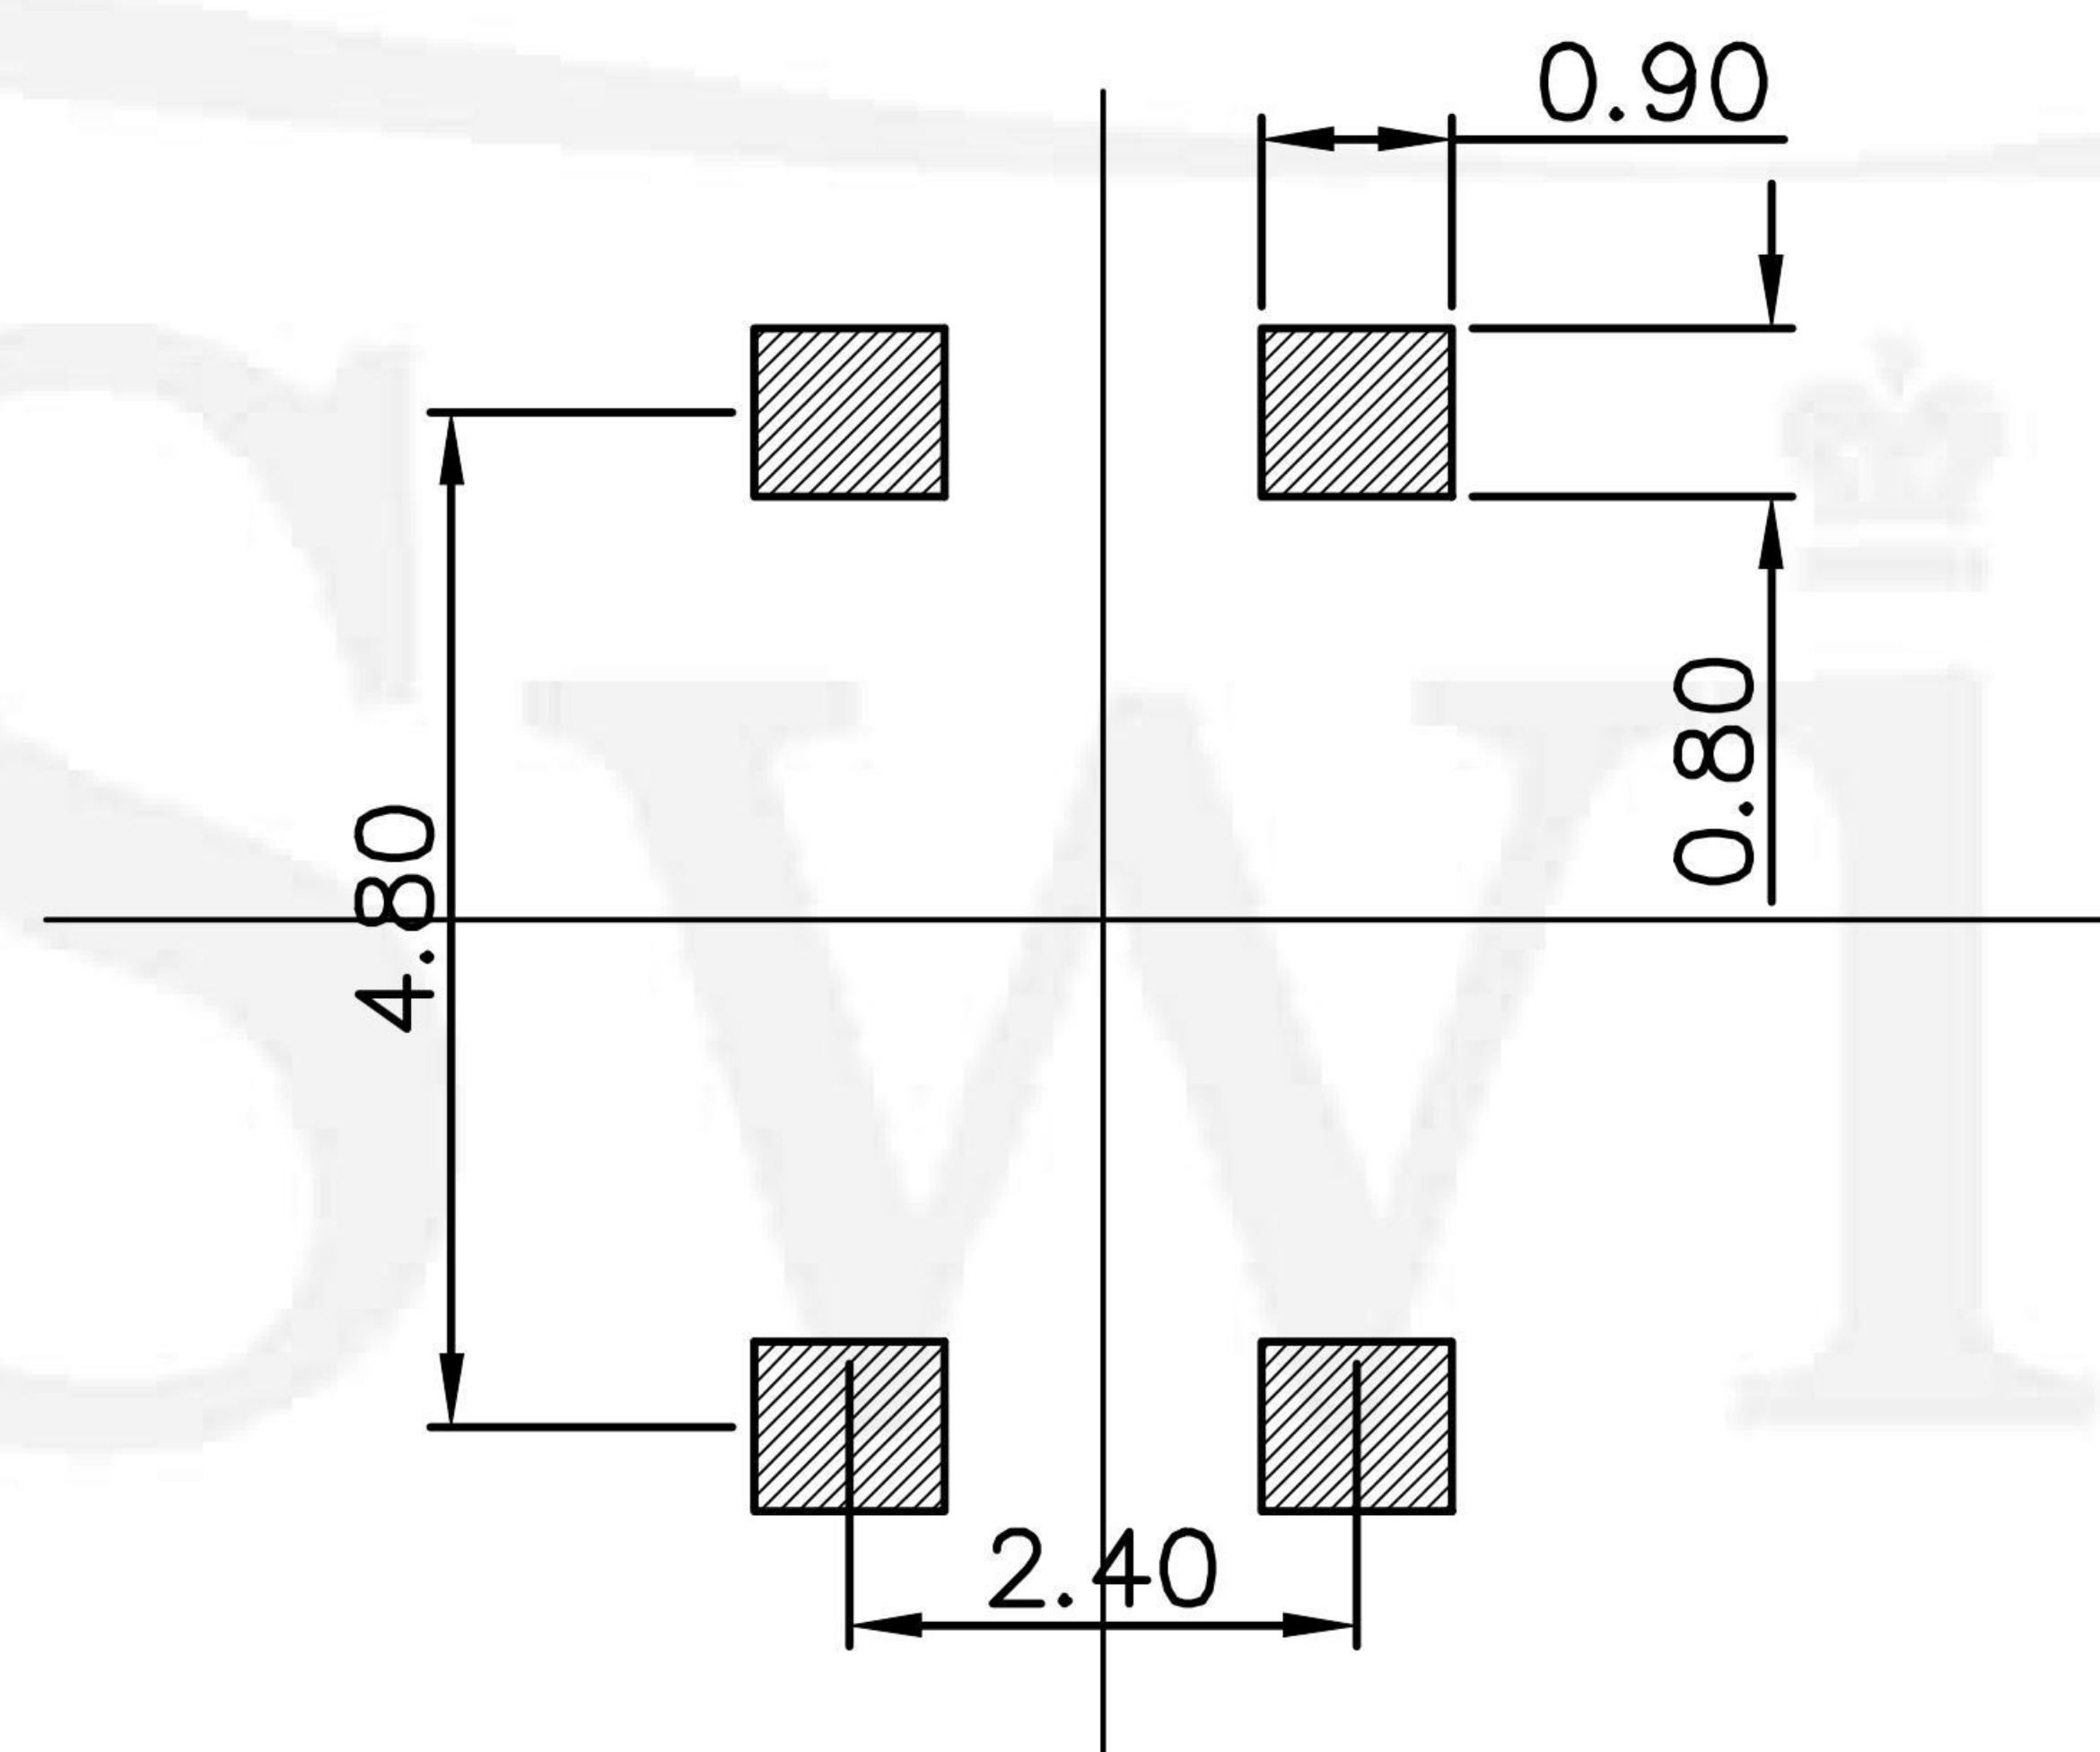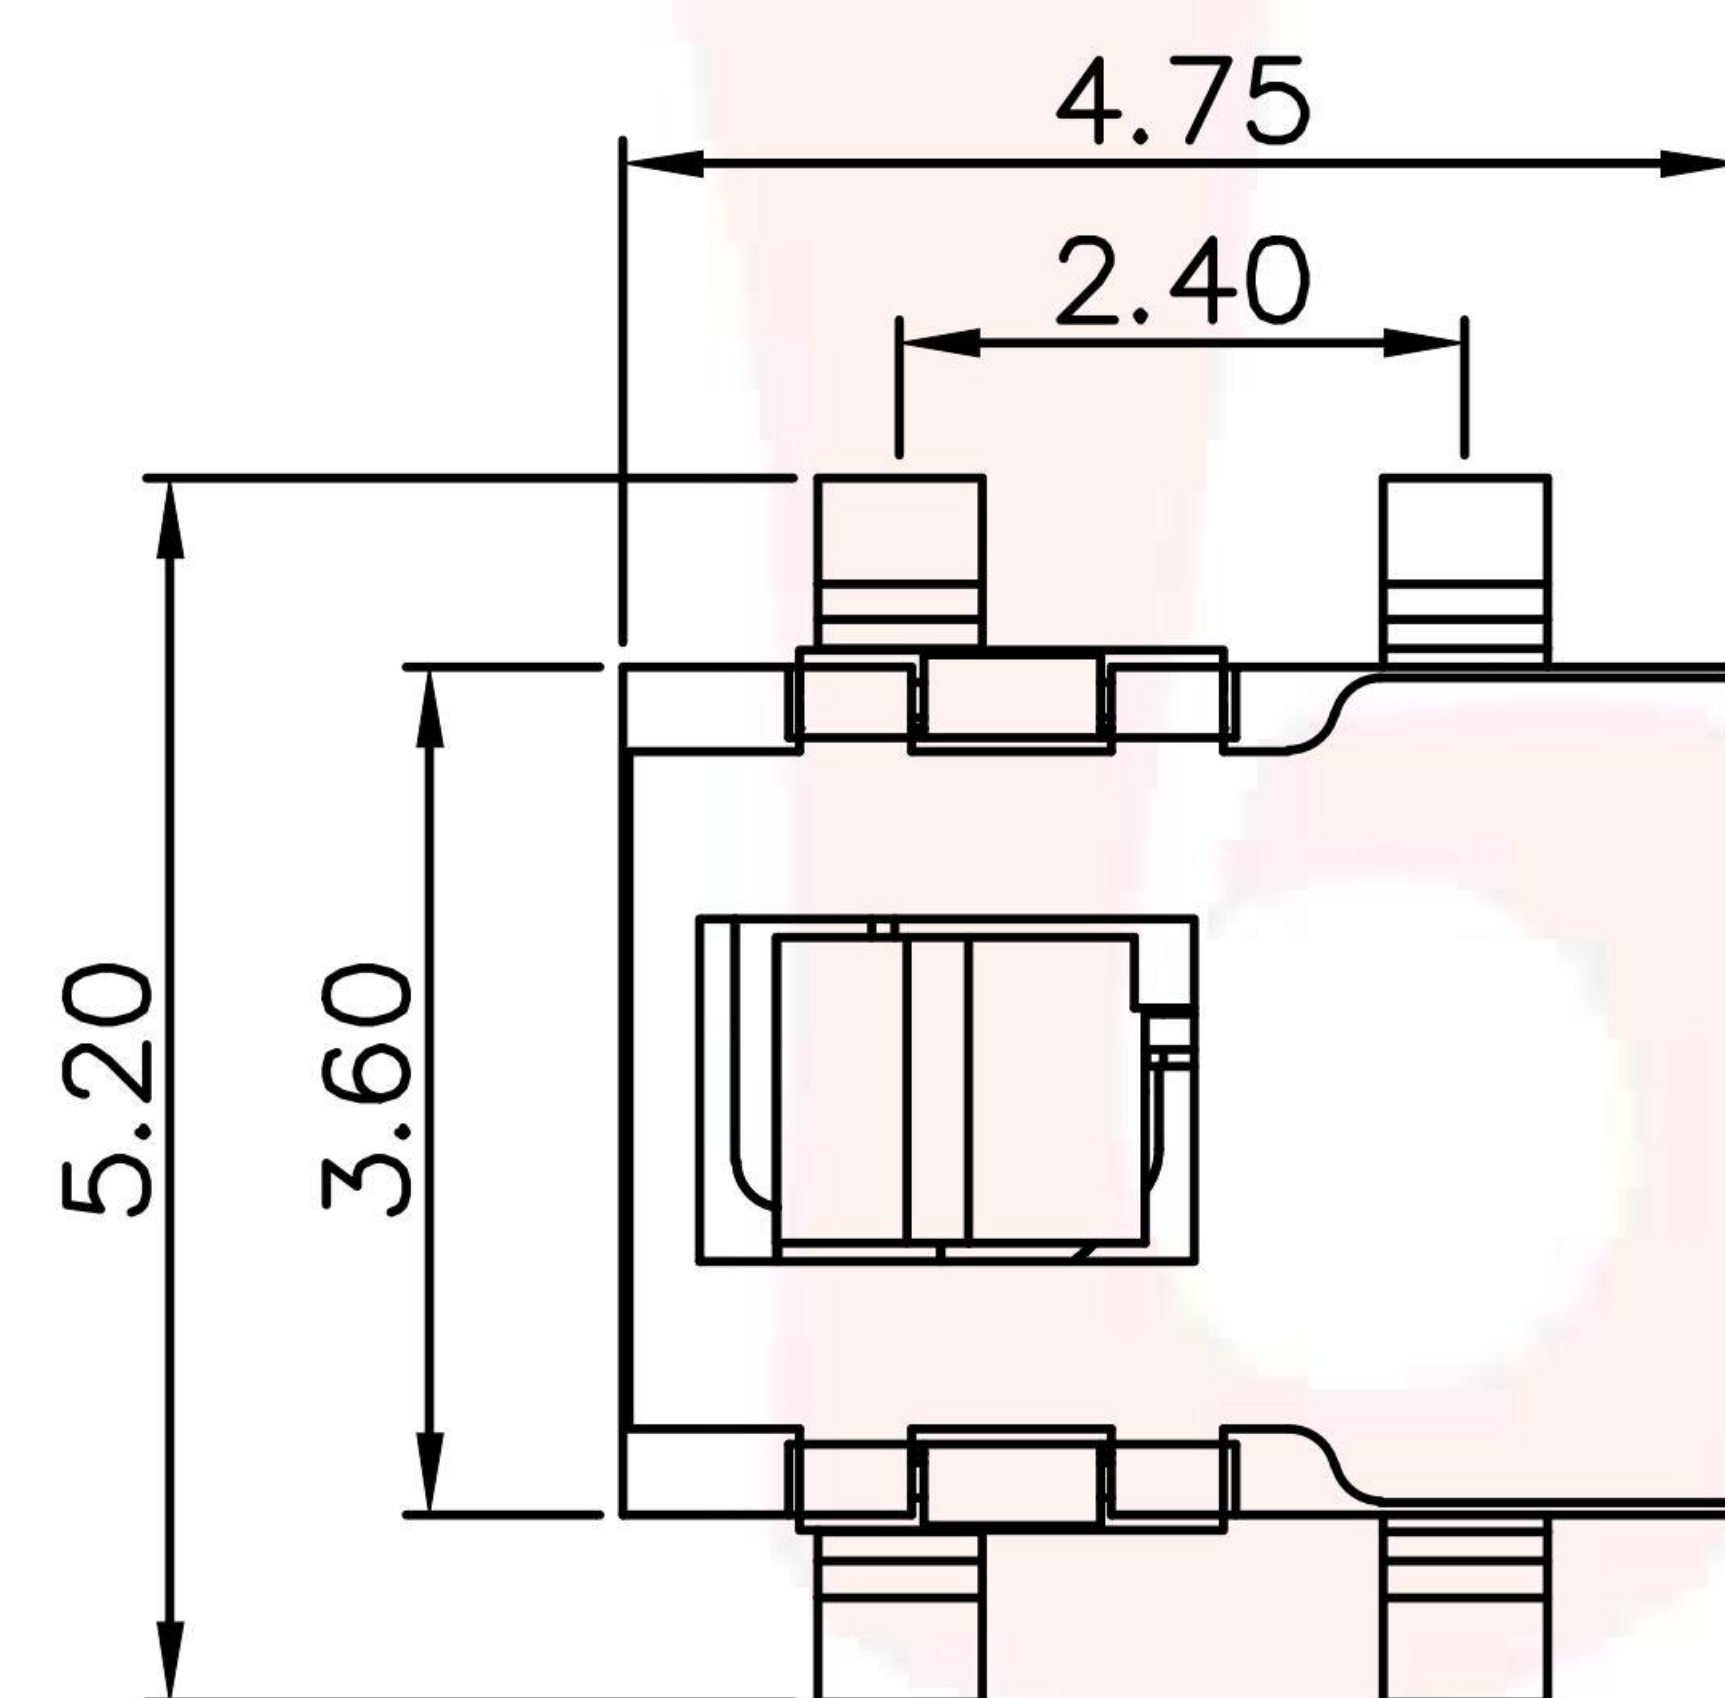


PCB. 焊接尺寸图

G-Switch Specification:

Electrical Specifications: 10mA 5V DC
Contact Resistance : 50mΩMAX
Insulation Resistance: 100MΩ min. 100V DC
Withstand Voltage: 100V AC/1 min
Operating Temperature: -10°C~+60°C
Storage Temperature: -40°C~+70°C
Operating Life: 100,000 cycles

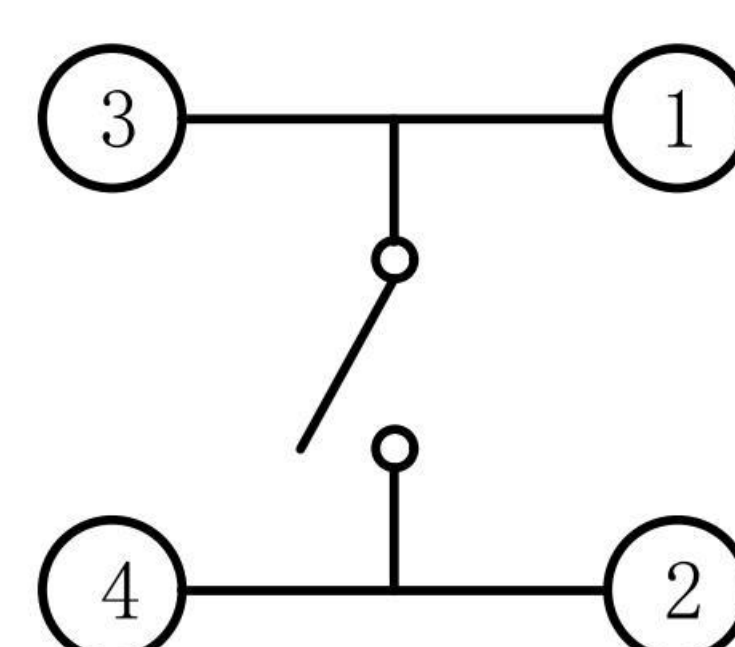

原理图

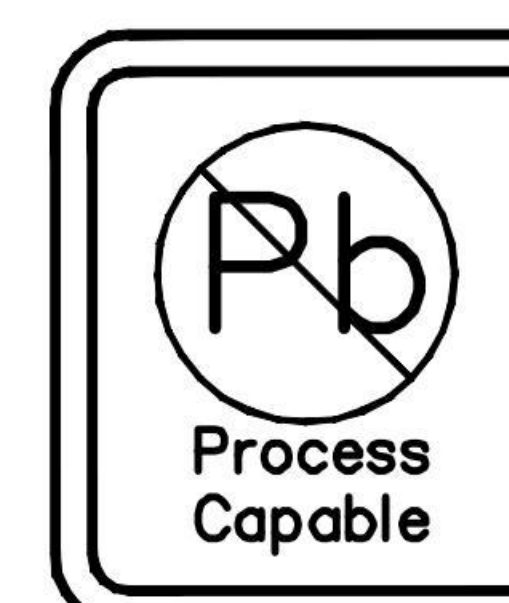

RoHS
Compliant
2002/95/EC



Compliant
Halogen Free



Unless otherwise
specified, Tolerance:
X. ±0.30
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
Angles ±3°

G-Switch Electronic (HongKong) CO.,Ltd.

DESIGN Yvette Chen	DATE 2019.05.29	Molde code:		
CHECKED	DATE	GT-MPU215-H375-LXX		
APPROVED	DATE			
http://www.dg-switch.com		REV.: X1	SCALE: 4:1	UNIT: mm
TEL:0769-82388879		SIZE: A4	SHEET: 1/1	