

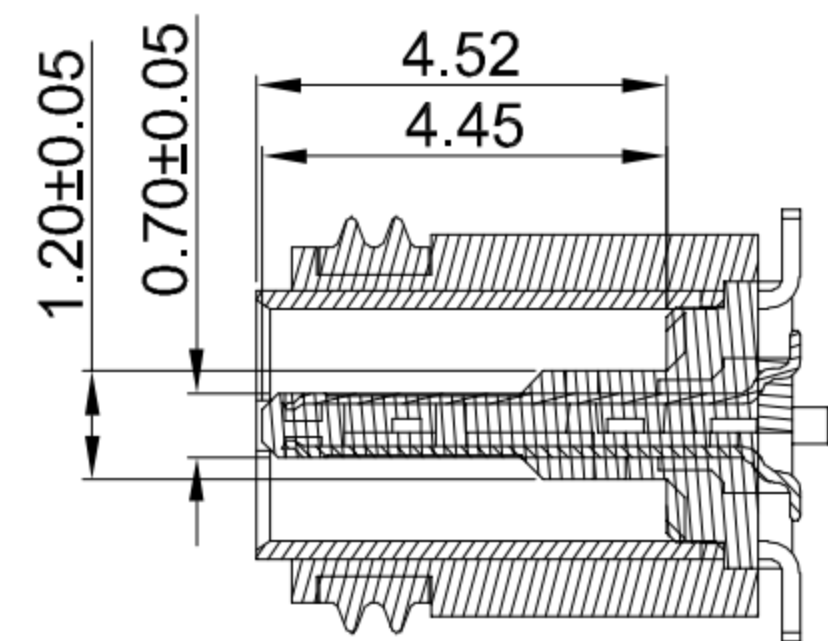
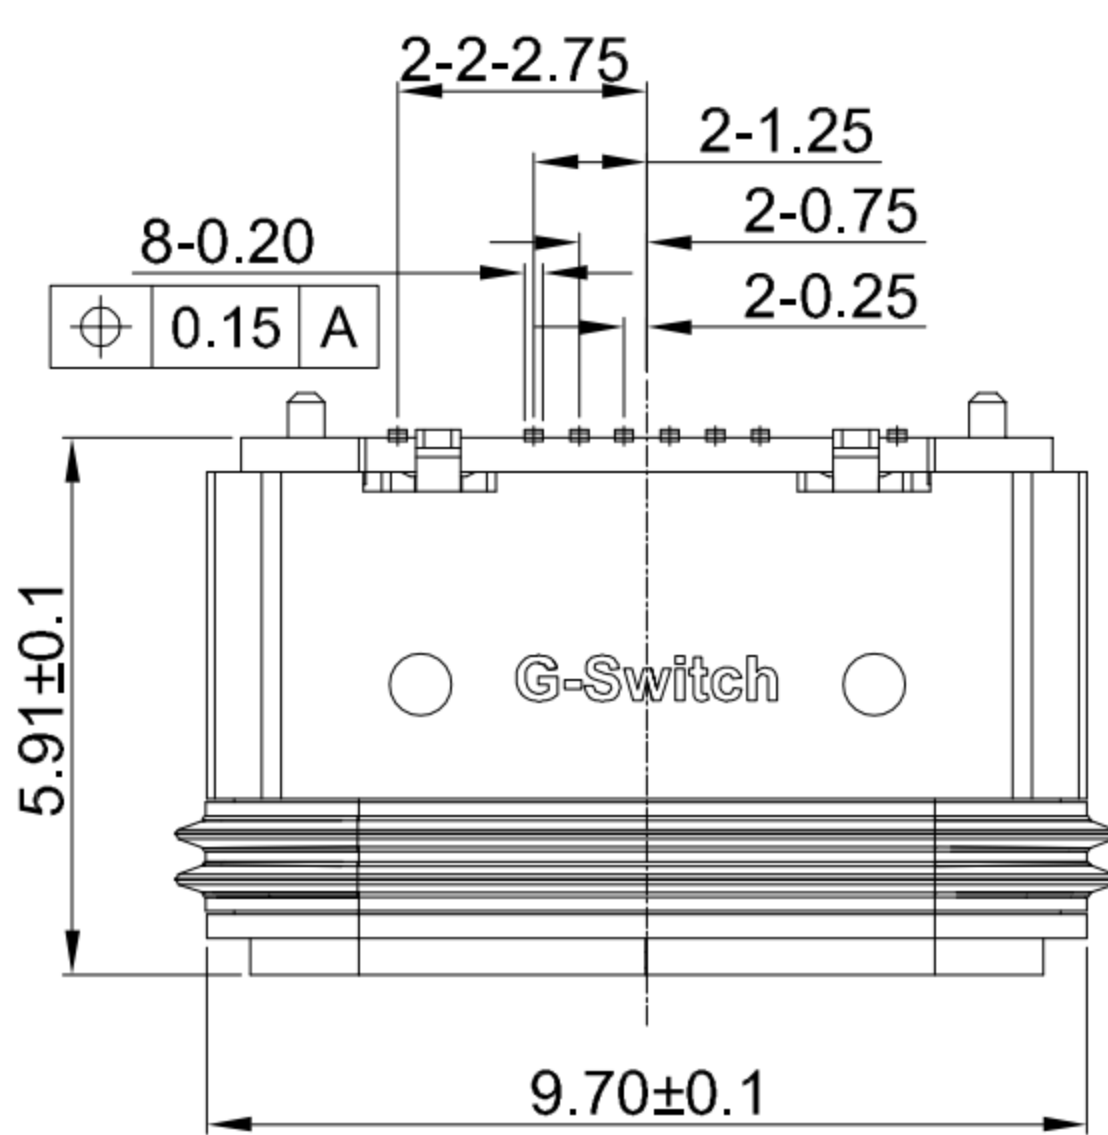
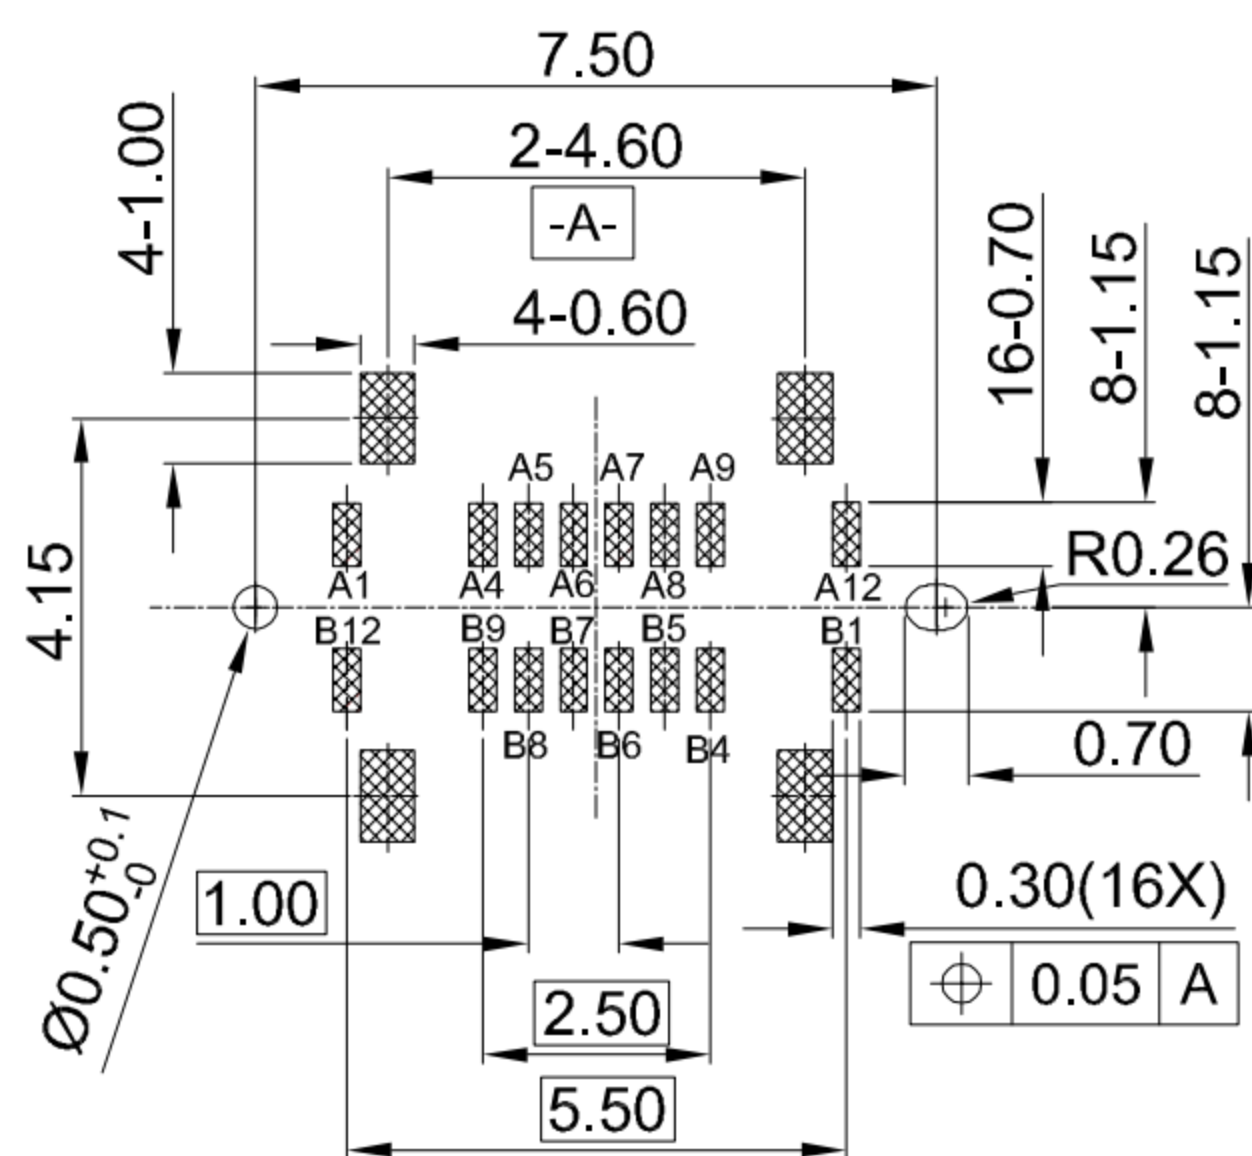
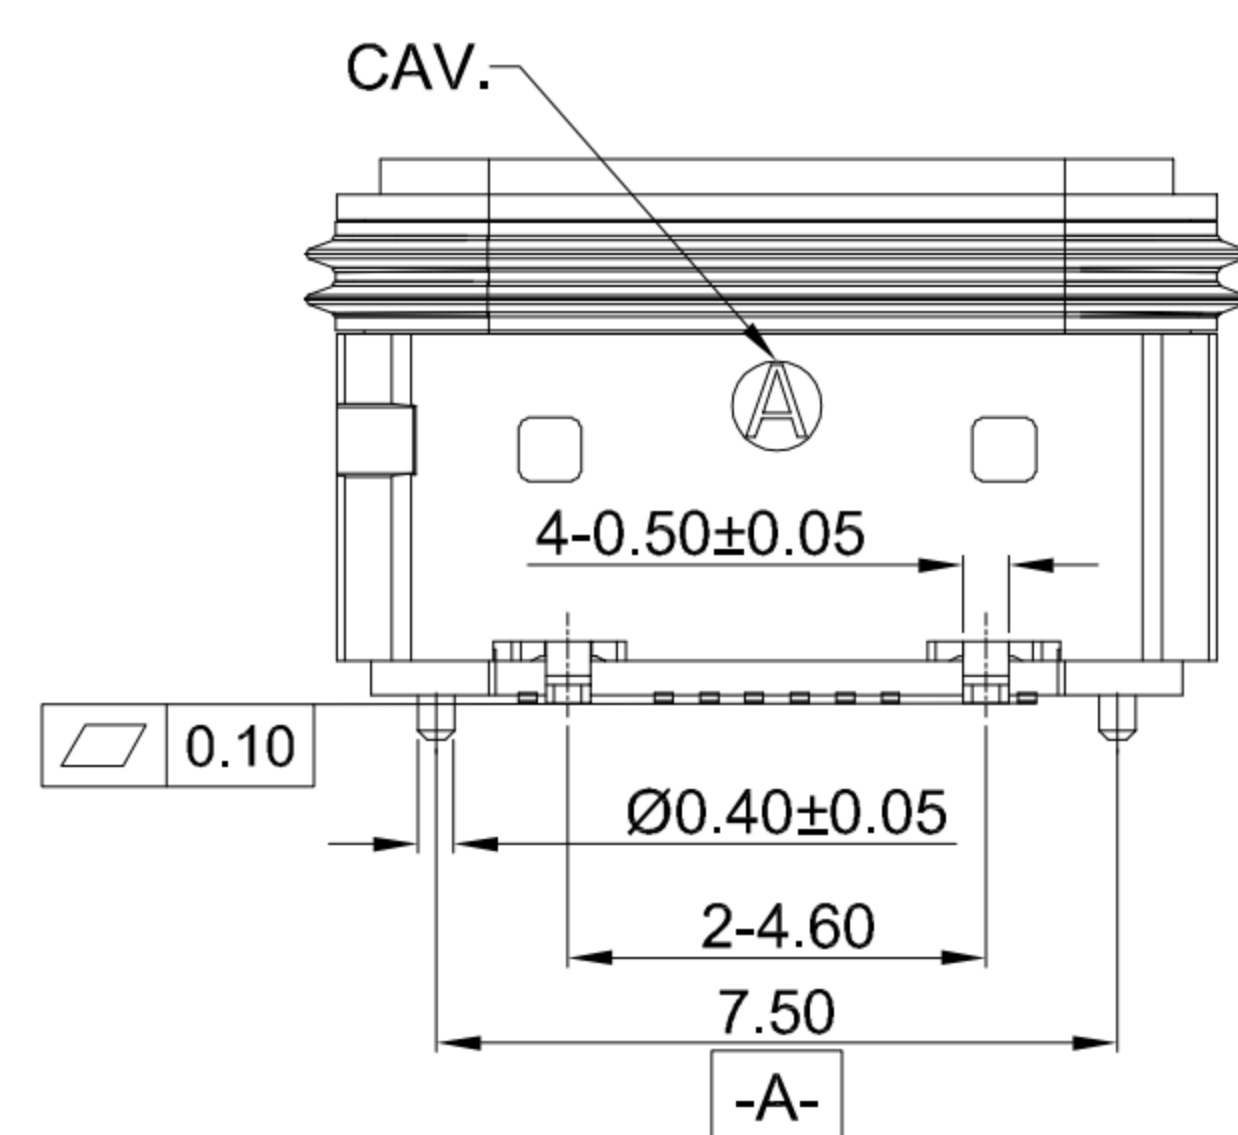
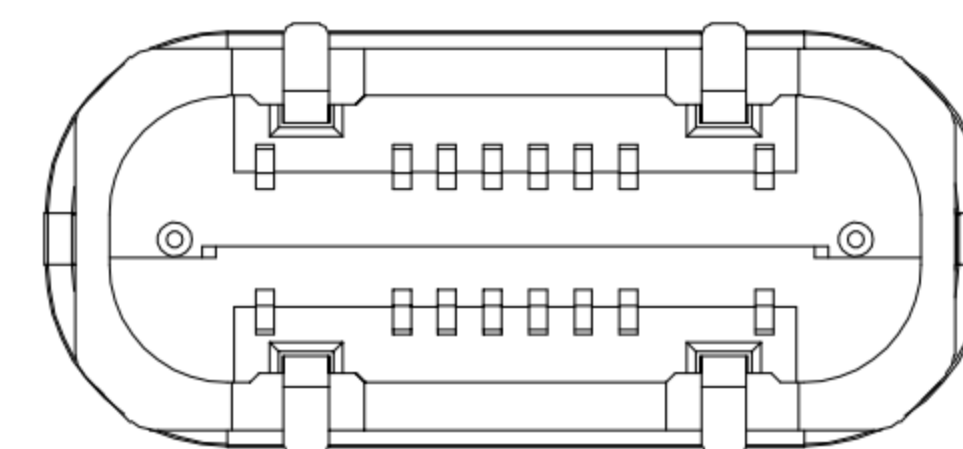
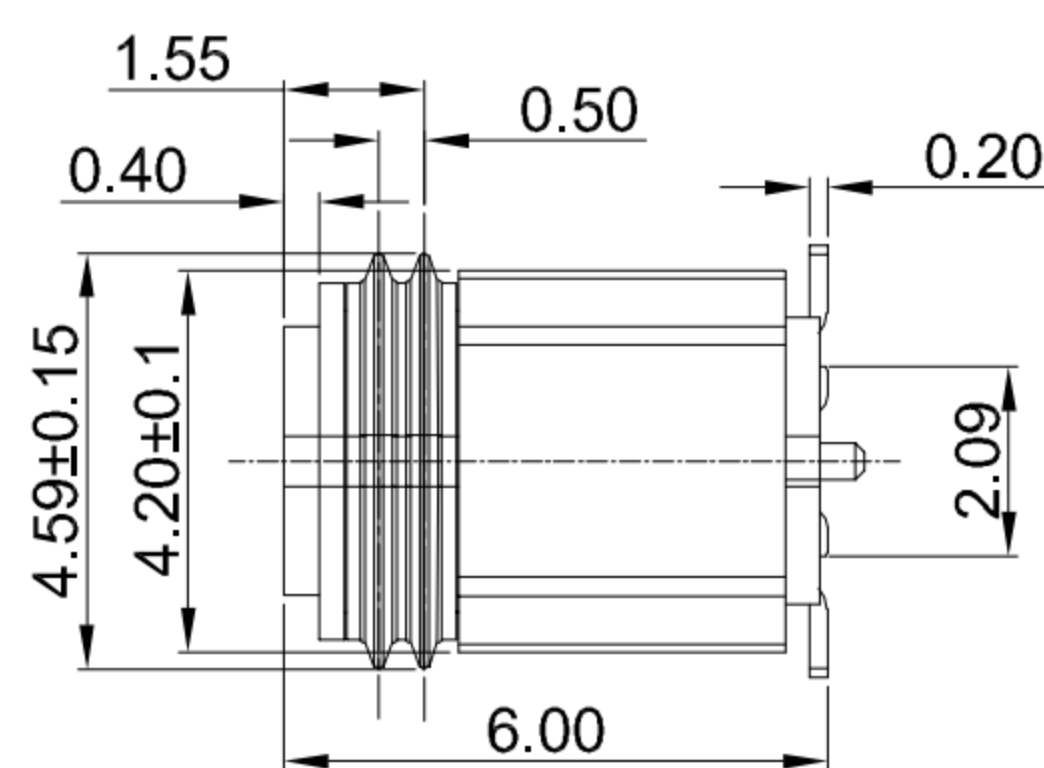


1
2
3
4
5



1
2
3
4
5

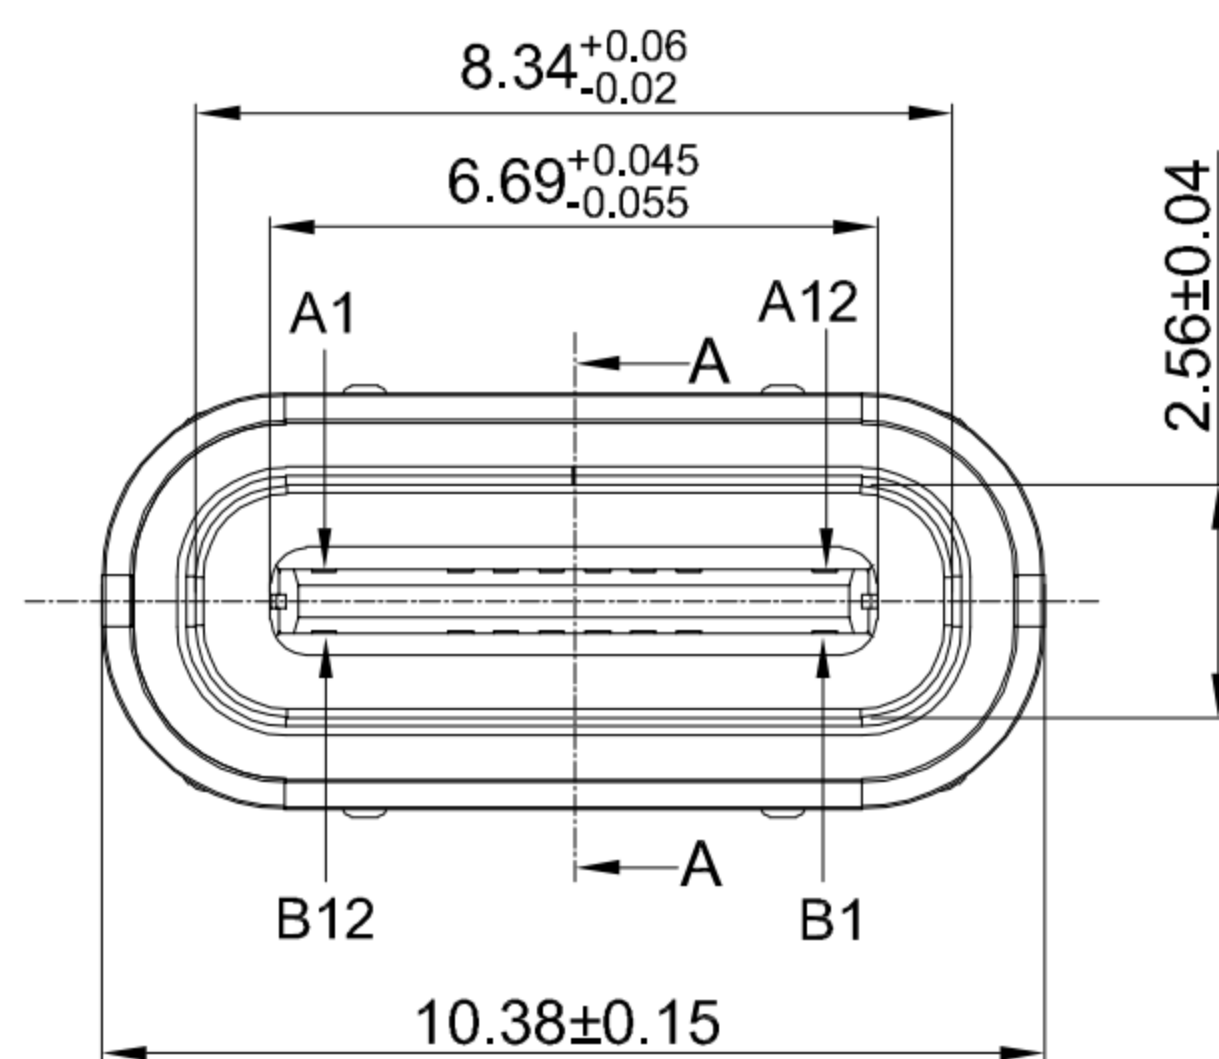


SECTION A-A

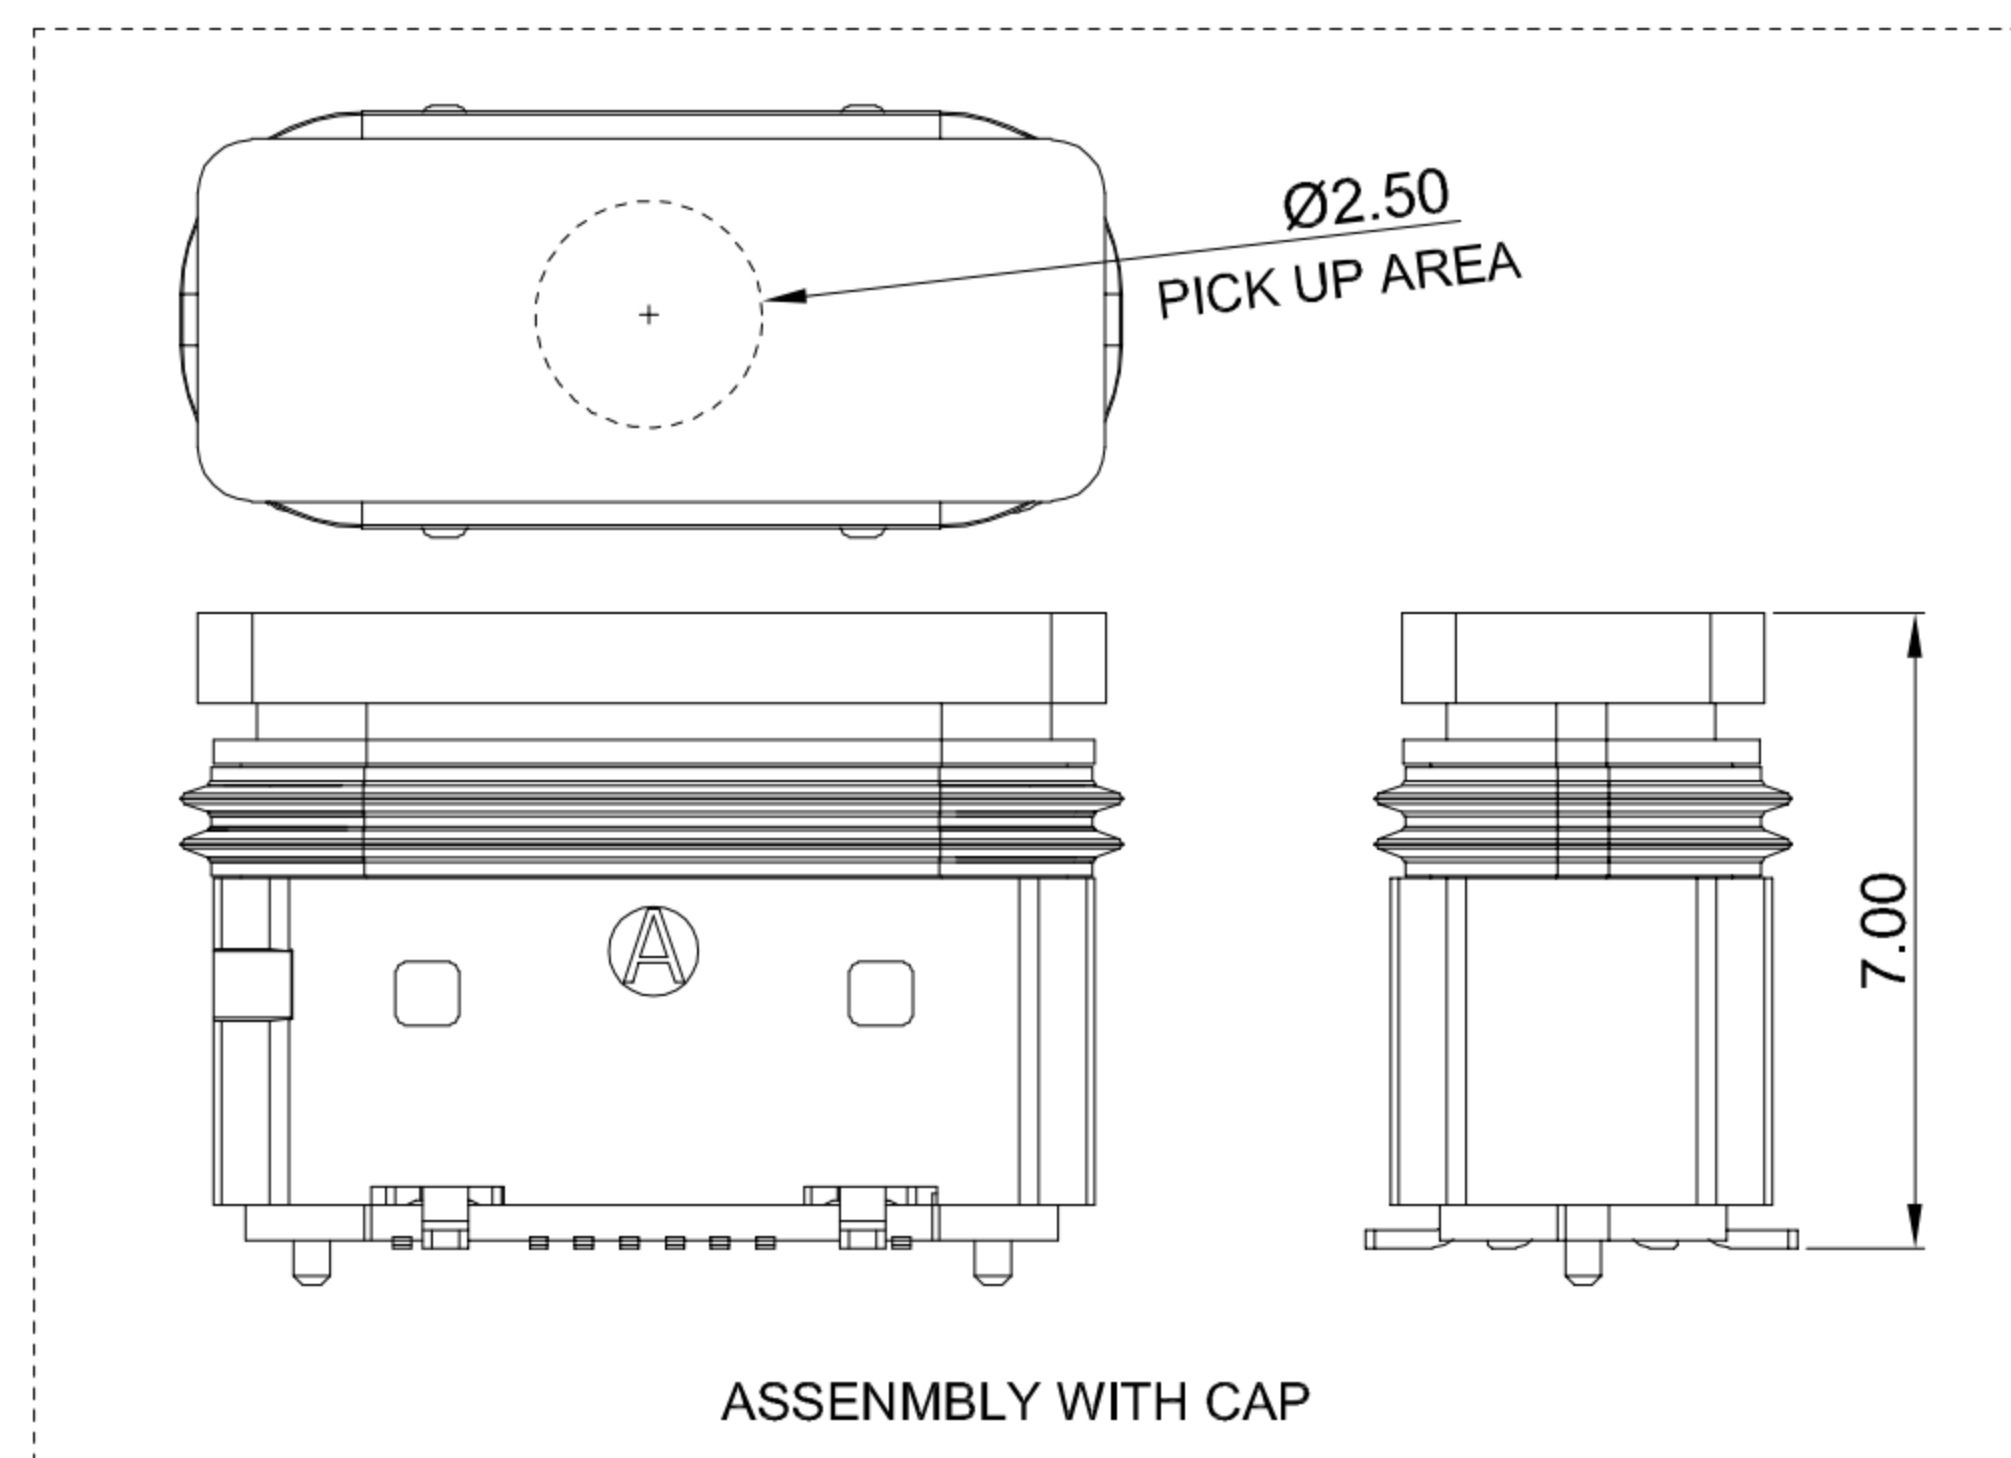

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05

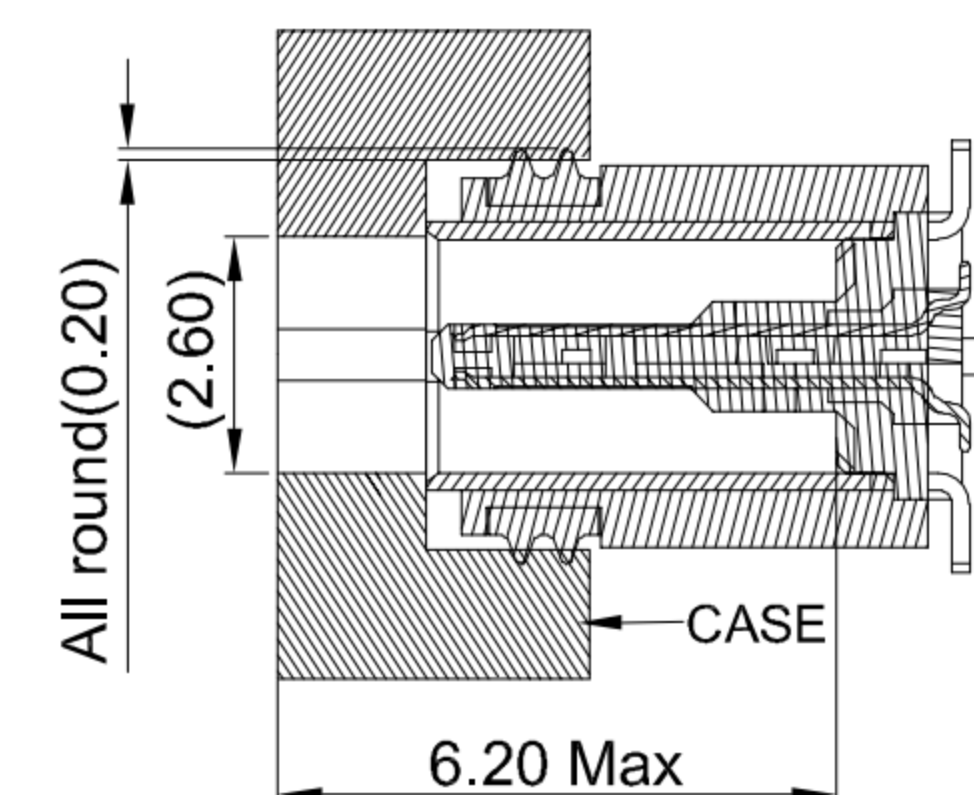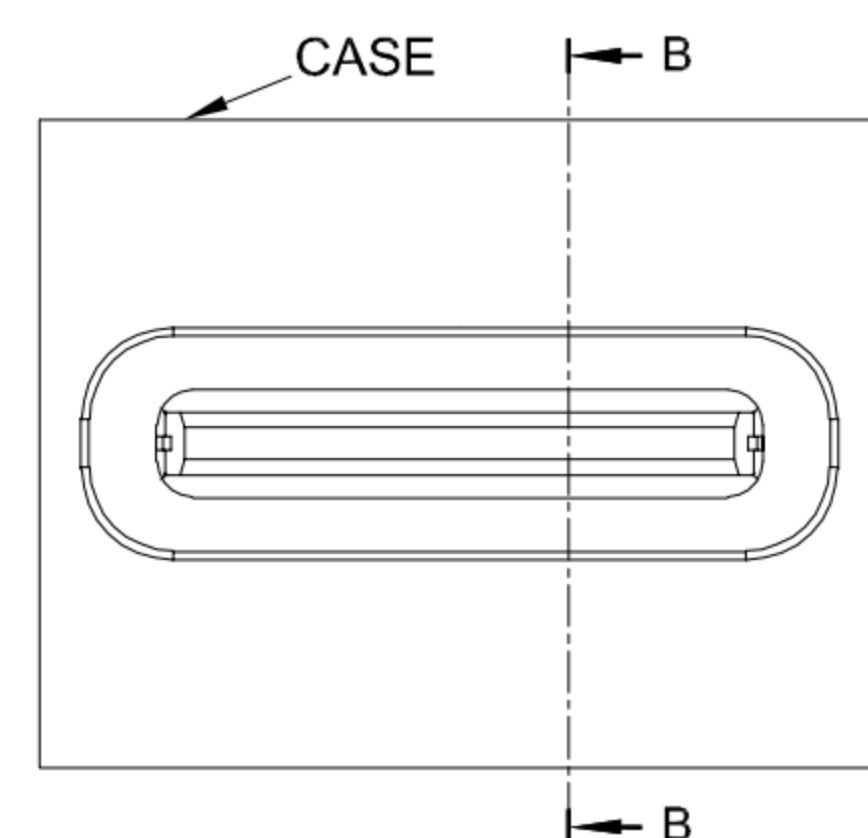

SECTION B-B

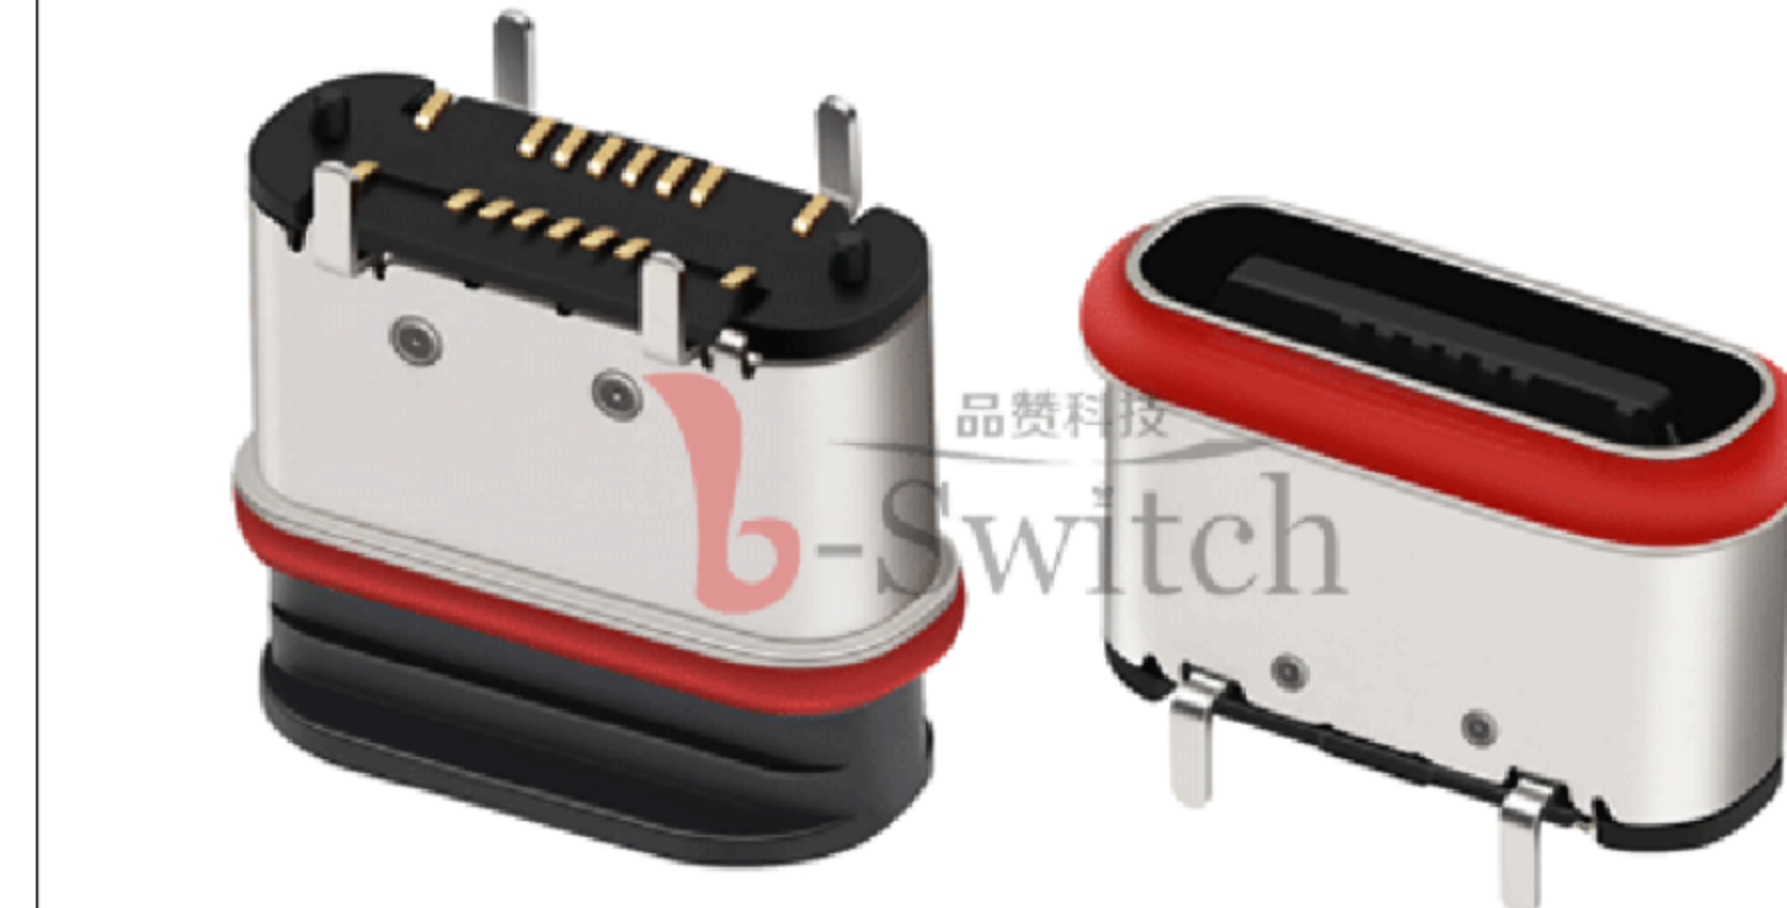


G-Switch USB-C Specification:

- 1.Current rated: 5A on vbus/1.25A on vconn/0.25A on other
Voltage rating: 24V AC
- 2.Withstanding voltage: 100V AC/minute
- 3.Contact resistance: 40mΩ Max
- 4.Insulation resistance: 100MΩ Min
- 5.Operating temperature: -40°C ~ +85°C
- 6.Mating force: 5N~20N
- 7.Unmating force: 8N~20N
- 8.Durability cycle:10,000 cycles
- 9.Waterproof grade: IP-X5.


A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			VBUS	CC1	D+	D-	SBU1	VBUS			GND
First			First	Second	Second	Second	Second	First			First

B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
GND			VBUS	SBU2	D-	D+	CC2	VBUS			GND
First			First	Second	Second	Second	Second	First			First

1	SHEATH	HIGH TEMPERATURE PLASTIC	LCP BLACK UL 94 V-0
2	SHELL	STAINLESS STEEL	Ni PLATED
3	MID PLATE	STAINLESS STEEL	CLEAR ONLY
4	HOUSING	HIGH TEMPERATURE PLASTIC	LCP BLACK UL 94 V-0
5	TERMINALS	COPPER ALLOY	Au PLATING ON CONTACT AREA
6	O-RING	SILICA GEL	RED
NO.	PARTS	MATERIAL	REMARKS

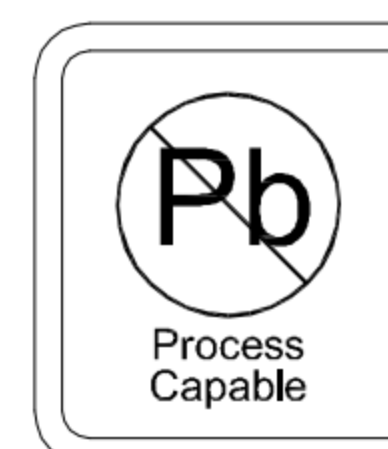

RoHS
Compliant
EU RoHS Standards

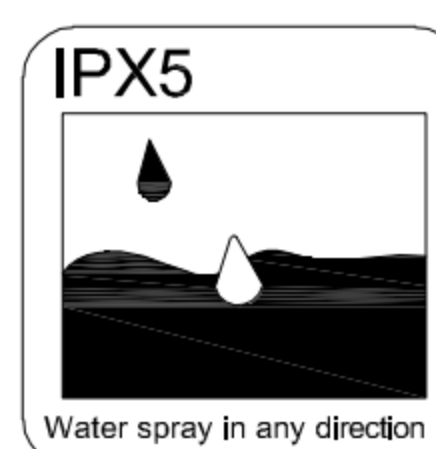

SCALE: 1:1	UNIT: mm	Title: Vertical Type-c 16P Female SMT H=6.0mm			
SIZE: A4		Molde Code: GT-USB-7074A01			
Unless otherwise General Tolerance:					
X.x ±0.30					
X.xx ±0.25					
X.xxx ±0.15					
X° ±1°					
		DRAWN	CHECKED	APPROVED	DATE
		Xia	Chen	Chen	2023.02.01



REV: A0 SHEET: 1/1