


**G-Switch USB-C Specification:**

1. Current rated: 5A on Vbus/1.25A on Vconn/0.25A on other
- Voltage rating: 5V AC
2. Withstanding voltage: 100V AC/minute
3. Contact Resistance: 40mΩ Max
4. Insulation Resistance: 100MΩ Min
5. Operating temperature: -40 °C ~ +85 °C
6. Mating force: 5N~20N
7. Unmating force: 8N~20N
8. Durability Cycle: 10,000 Cycles
9. Data transmission rate up to 5Gbp/s

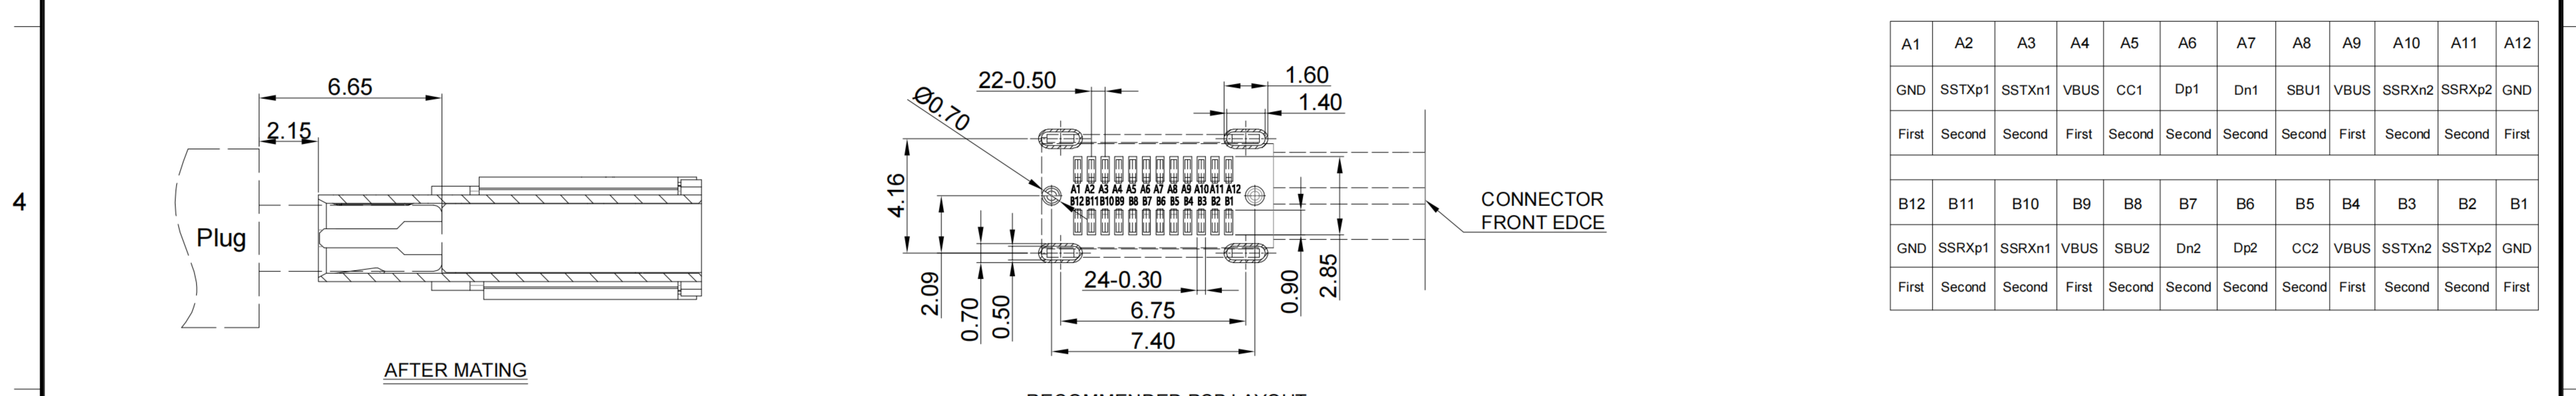

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	SSTXp1	SSTXn1	VBUS	CC1	Dp1	Dn1	SBU1	VBUS	SSRXn2	SSRXp2	GND
First	Second	Second	First	Second	Second	Second	Second	First	Second	Second	First

B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
GND	SSRXp1	SSRXn1	VBUS	SBU2	Dn2	Dp2	CC2	VBUS	SSTXn2	SSTXp2	GND
First	Second	Second	First	Second	Second	Second	Second	First	Second	Second	First

1	SHELL	STAINLESS STEEL	1Pcs	Ni PLATED
2	MID PLATE	STAINLESS STEEL	2Pcs	Ni PLATED
3	INSULATOR	HIGH TEMPERATURE PLASTIC	1Pcs	BLACK UL 94 V-0
4	TERMINAL	COPPER ALLOY	2Set	Au3u" PLATING ON CONTACT AREA
NO.	PARTS	MATERIAL	QTY	REMARKS

SCALE: 3:1	UNIT: mm	Title: Flag Type-c 24P Female SMT CH=5.1 L=13.9mm	
SIZE: A4		Title: Flag Type-c 24P Female SMT CH=5.1 L=13.9mm	
Unless otherwise General Tolerance:		Title: Flag Type-c 24P Female SMT CH=5.1 L=13.9mm	
X.		Title: Flag Type-c 24P Female SMT CH=5.1 L=13.9mm	
X.x	±0.30	Title: Flag Type-c 24P Female SMT CH=5.1 L=13.9mm	
X.xx	±0.25	Title: Flag Type-c 24P Female SMT CH=5.1 L=13.9mm	
X.xxx	±0.15	Title: Flag Type-c 24P Female SMT CH=5.1 L=13.9mm	
Angles	±1°	Title: Flag Type-c 24P Female SMT CH=5.1 L=13.9mm	

RoHS Compliant		HALOGEN COMPLIANT	
EU RoHS Standards		Halogen Free	

MoIde Code:	GT-USB-7092B		
DRAWN	CHECKED	APPROVED	DATE
Xia	Chen	Chen	2023.01.31

REV:	A0	SHEET:	1/1
------	----	--------	-----

