




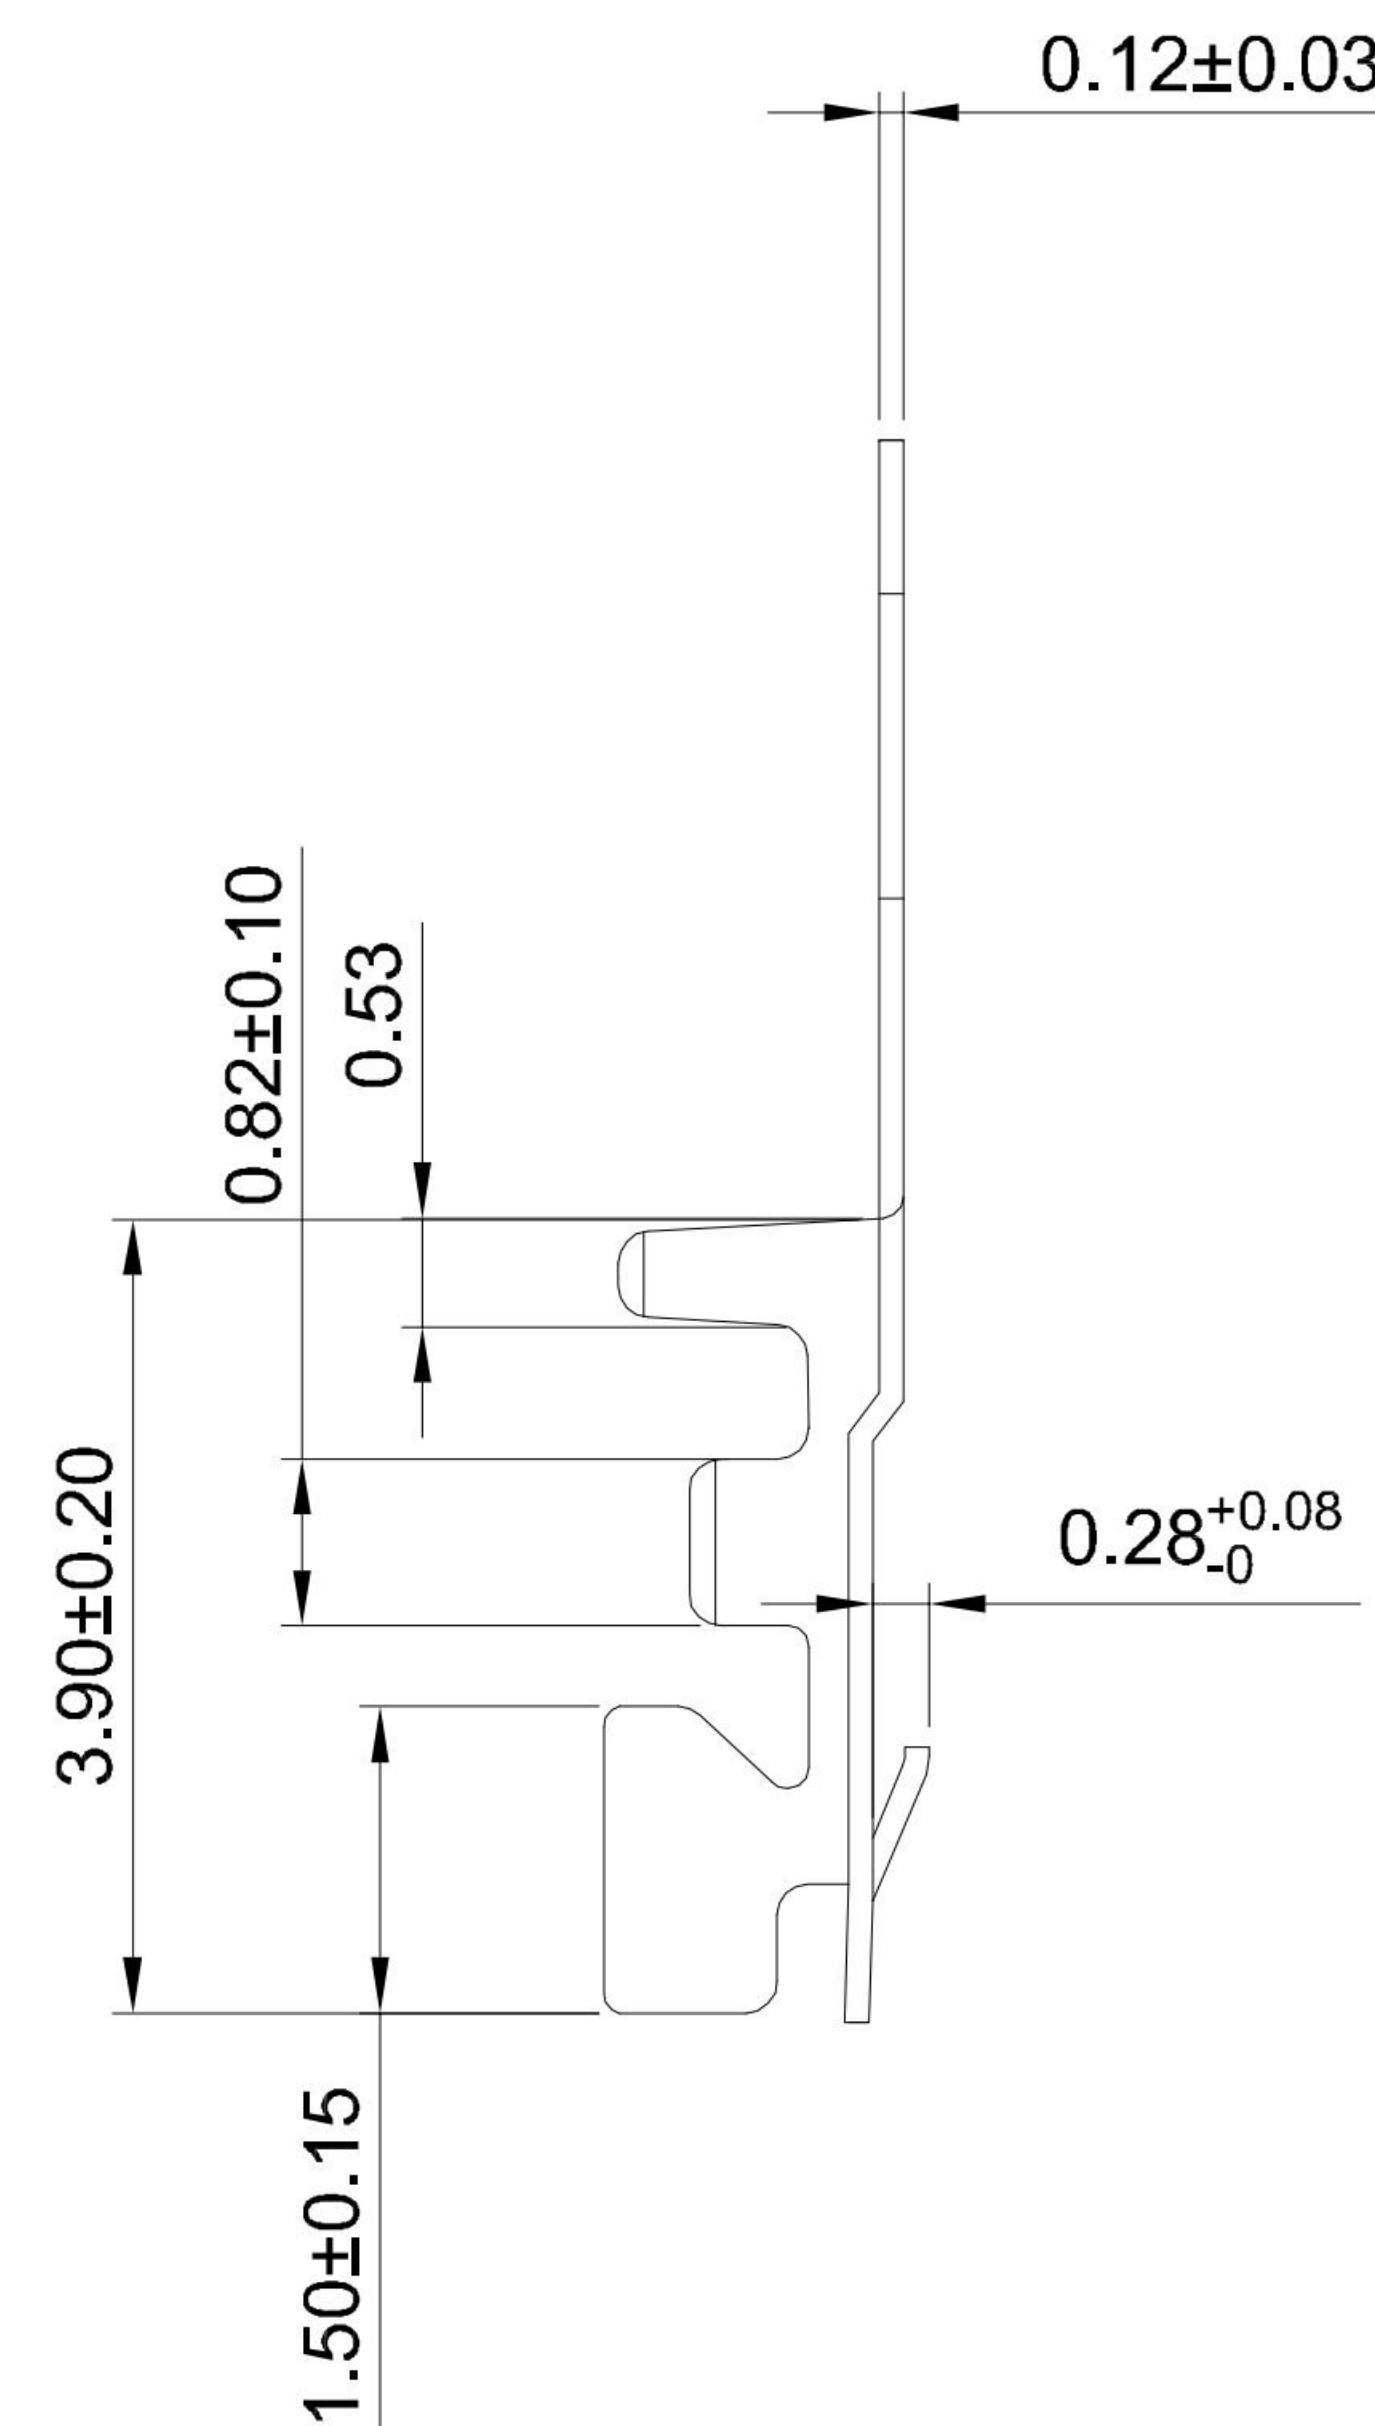

— **F-Female**

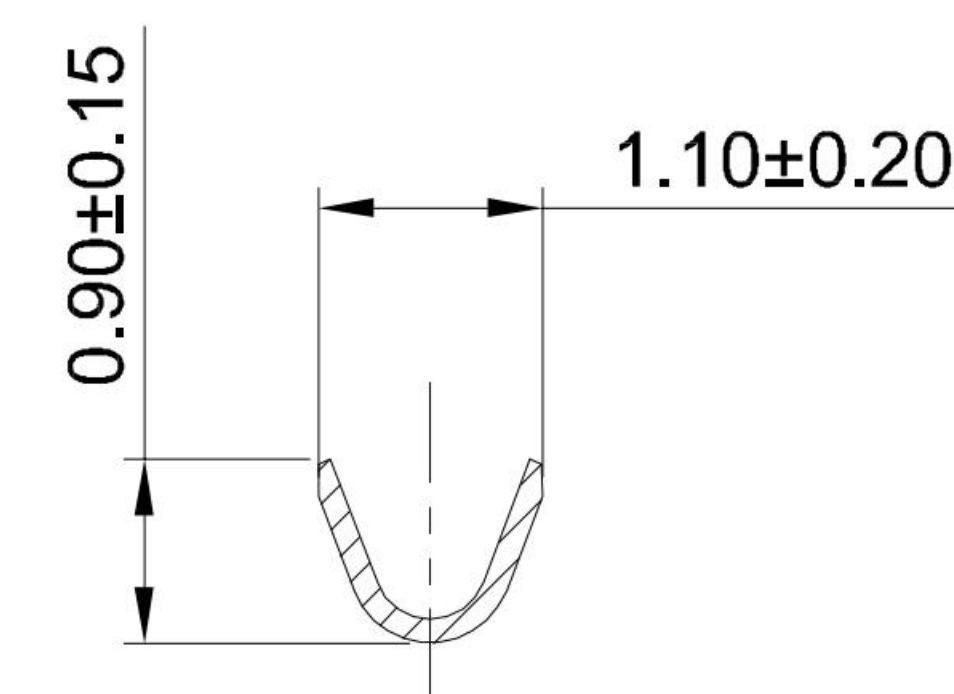

SECTION:B-B

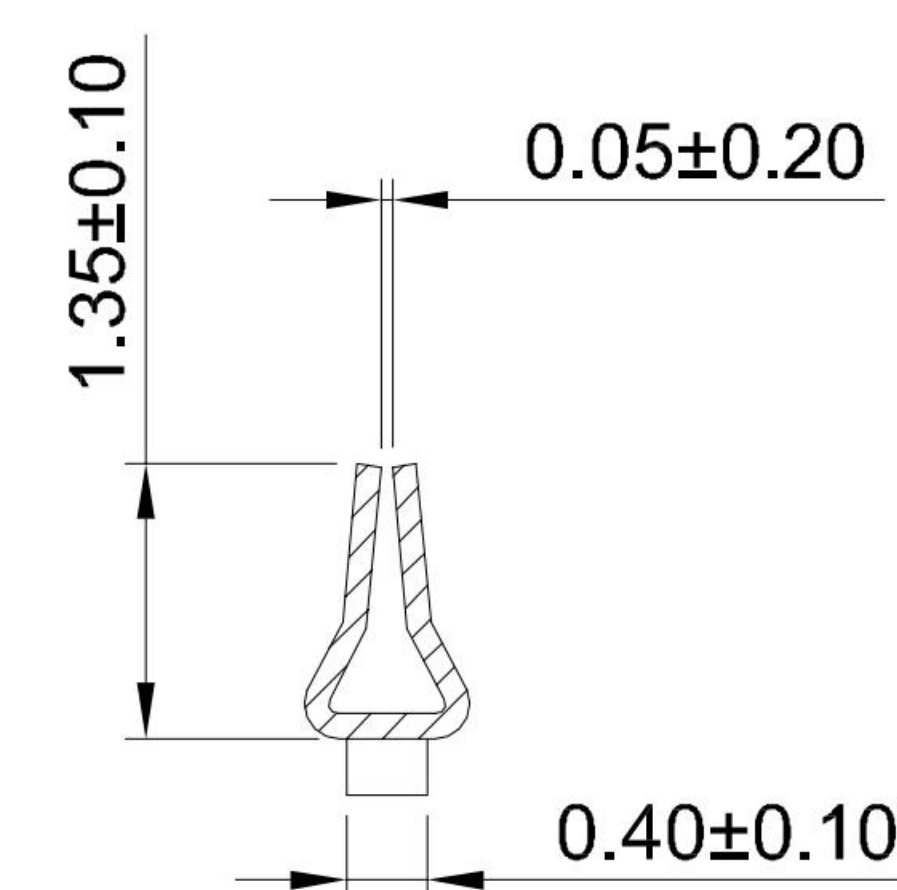

SECTION:C-C

- 1.Current rated: 1.0A AC/DC
- 2.Voltage rating: 50V AC/DC
- 3.Withstanding voltage: 500V AC
- 4.Contact resistance: 20mΩ max.
- 5.Insulation resistance: 100MΩ min
- 6.Durability cycle: 50Cycles
- 7.Removal force: 0.50kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

SCALE: 1:1	UNIT: mm	Title: Terminal 1.00mm Pitch SH Crimp Style				 品贊科技 -Switch www.dg-switch.com	
SIZE: A4							
Unless otherwise General Tolerance: X ±0.40 X.x ±0.30 X.xx ±0.20 X° ±5° X.x° ±3°		Molde Code: GT-A1002TF-XXX1					
		DRAWN	CHECKED	APPROVED	DATE		
		Hu	Chen	Chen	2021.10.20		
		REV: A0	SHEET: 1/1				

