
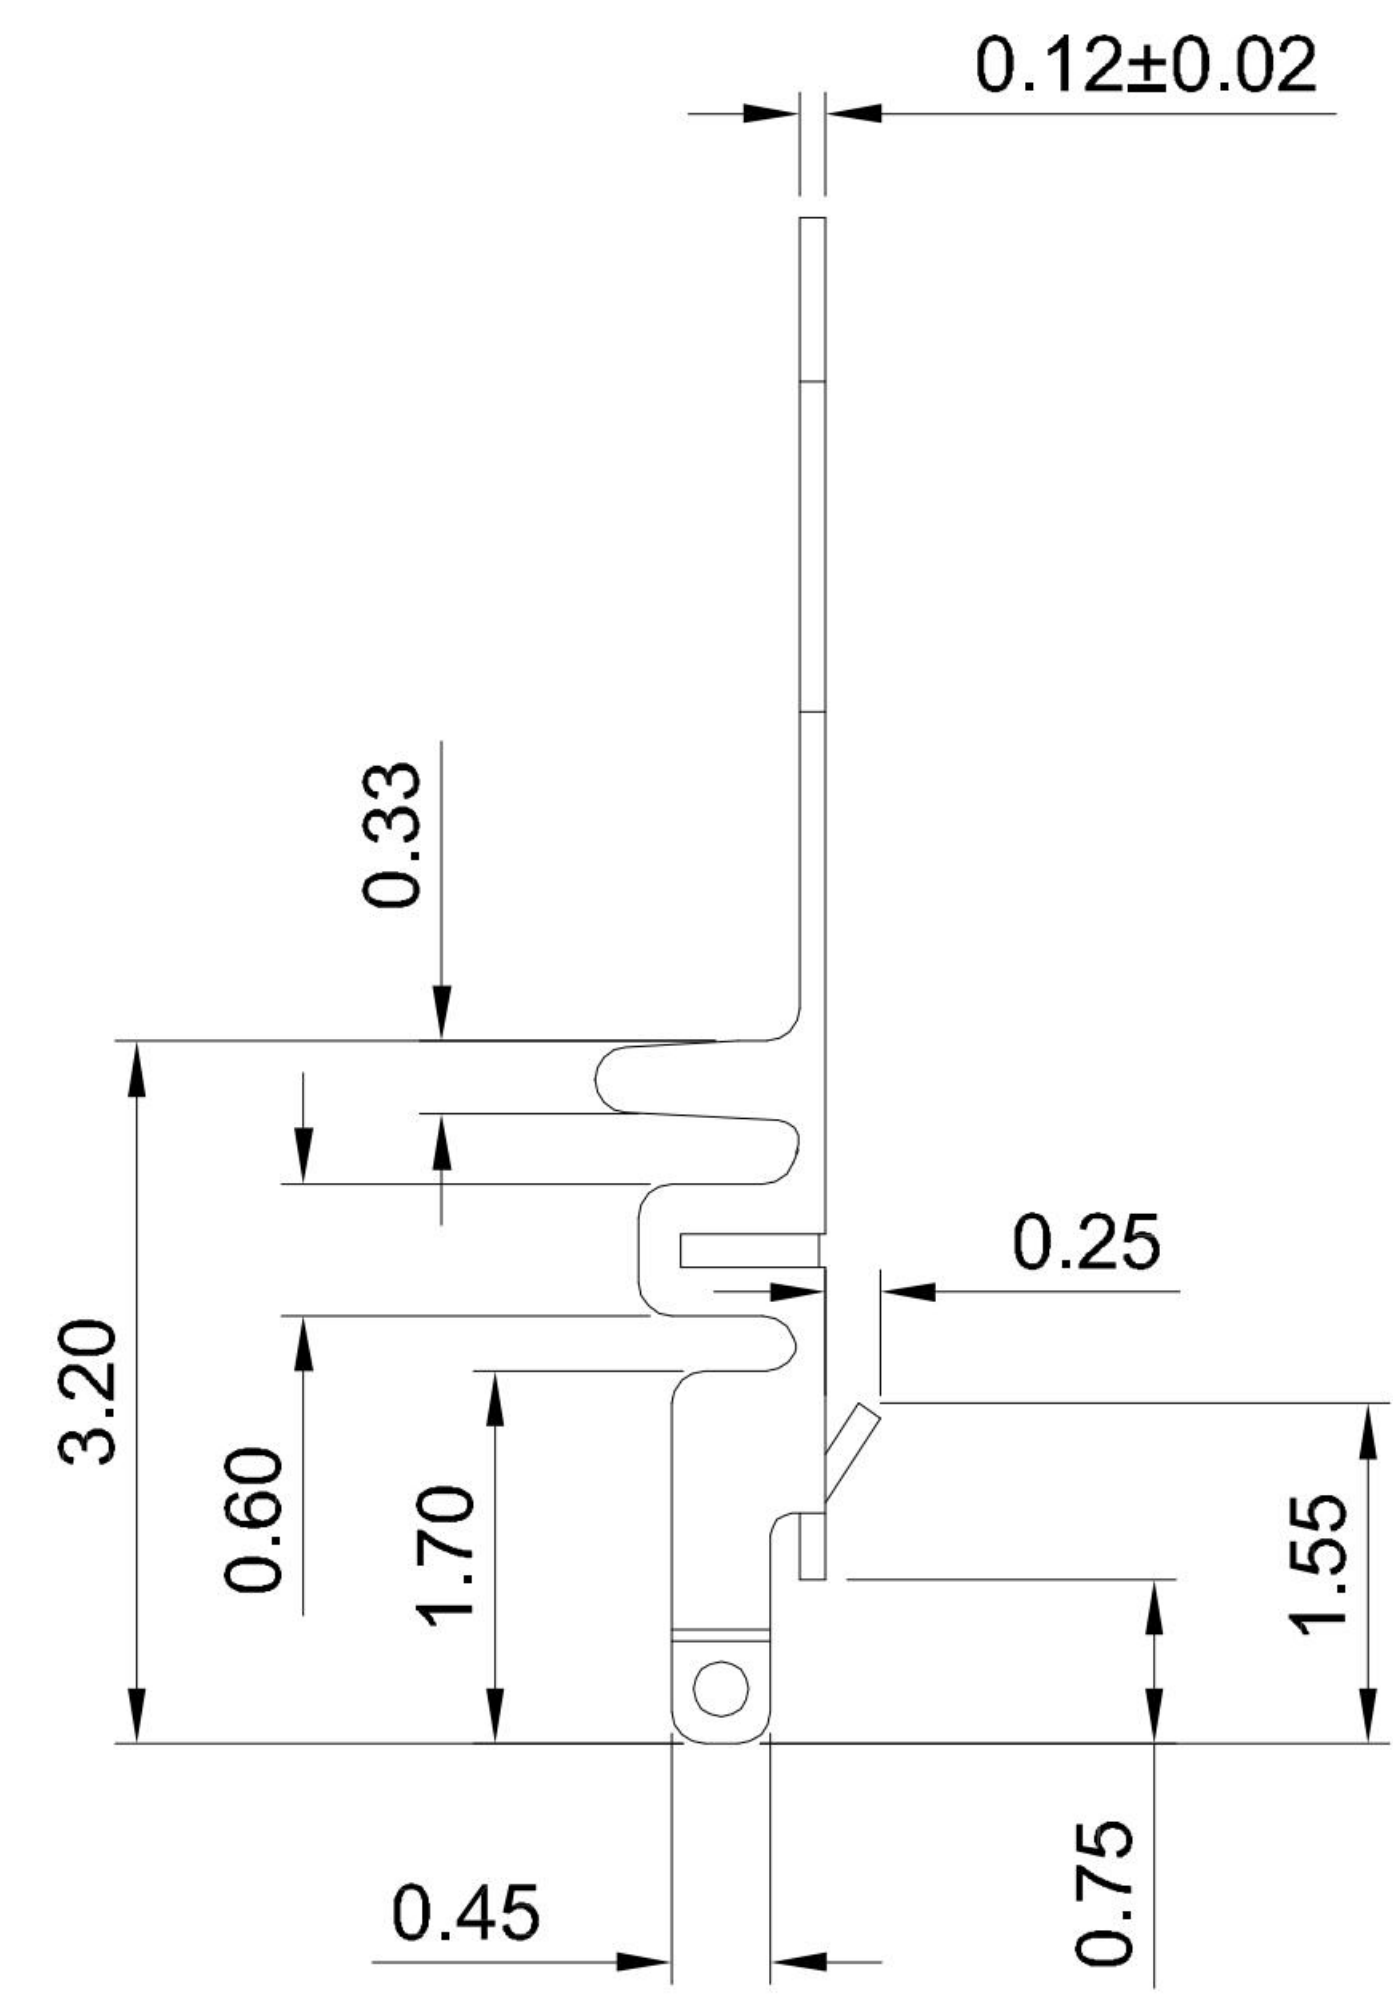


1
2
3
4
5

1
2
3
4
5

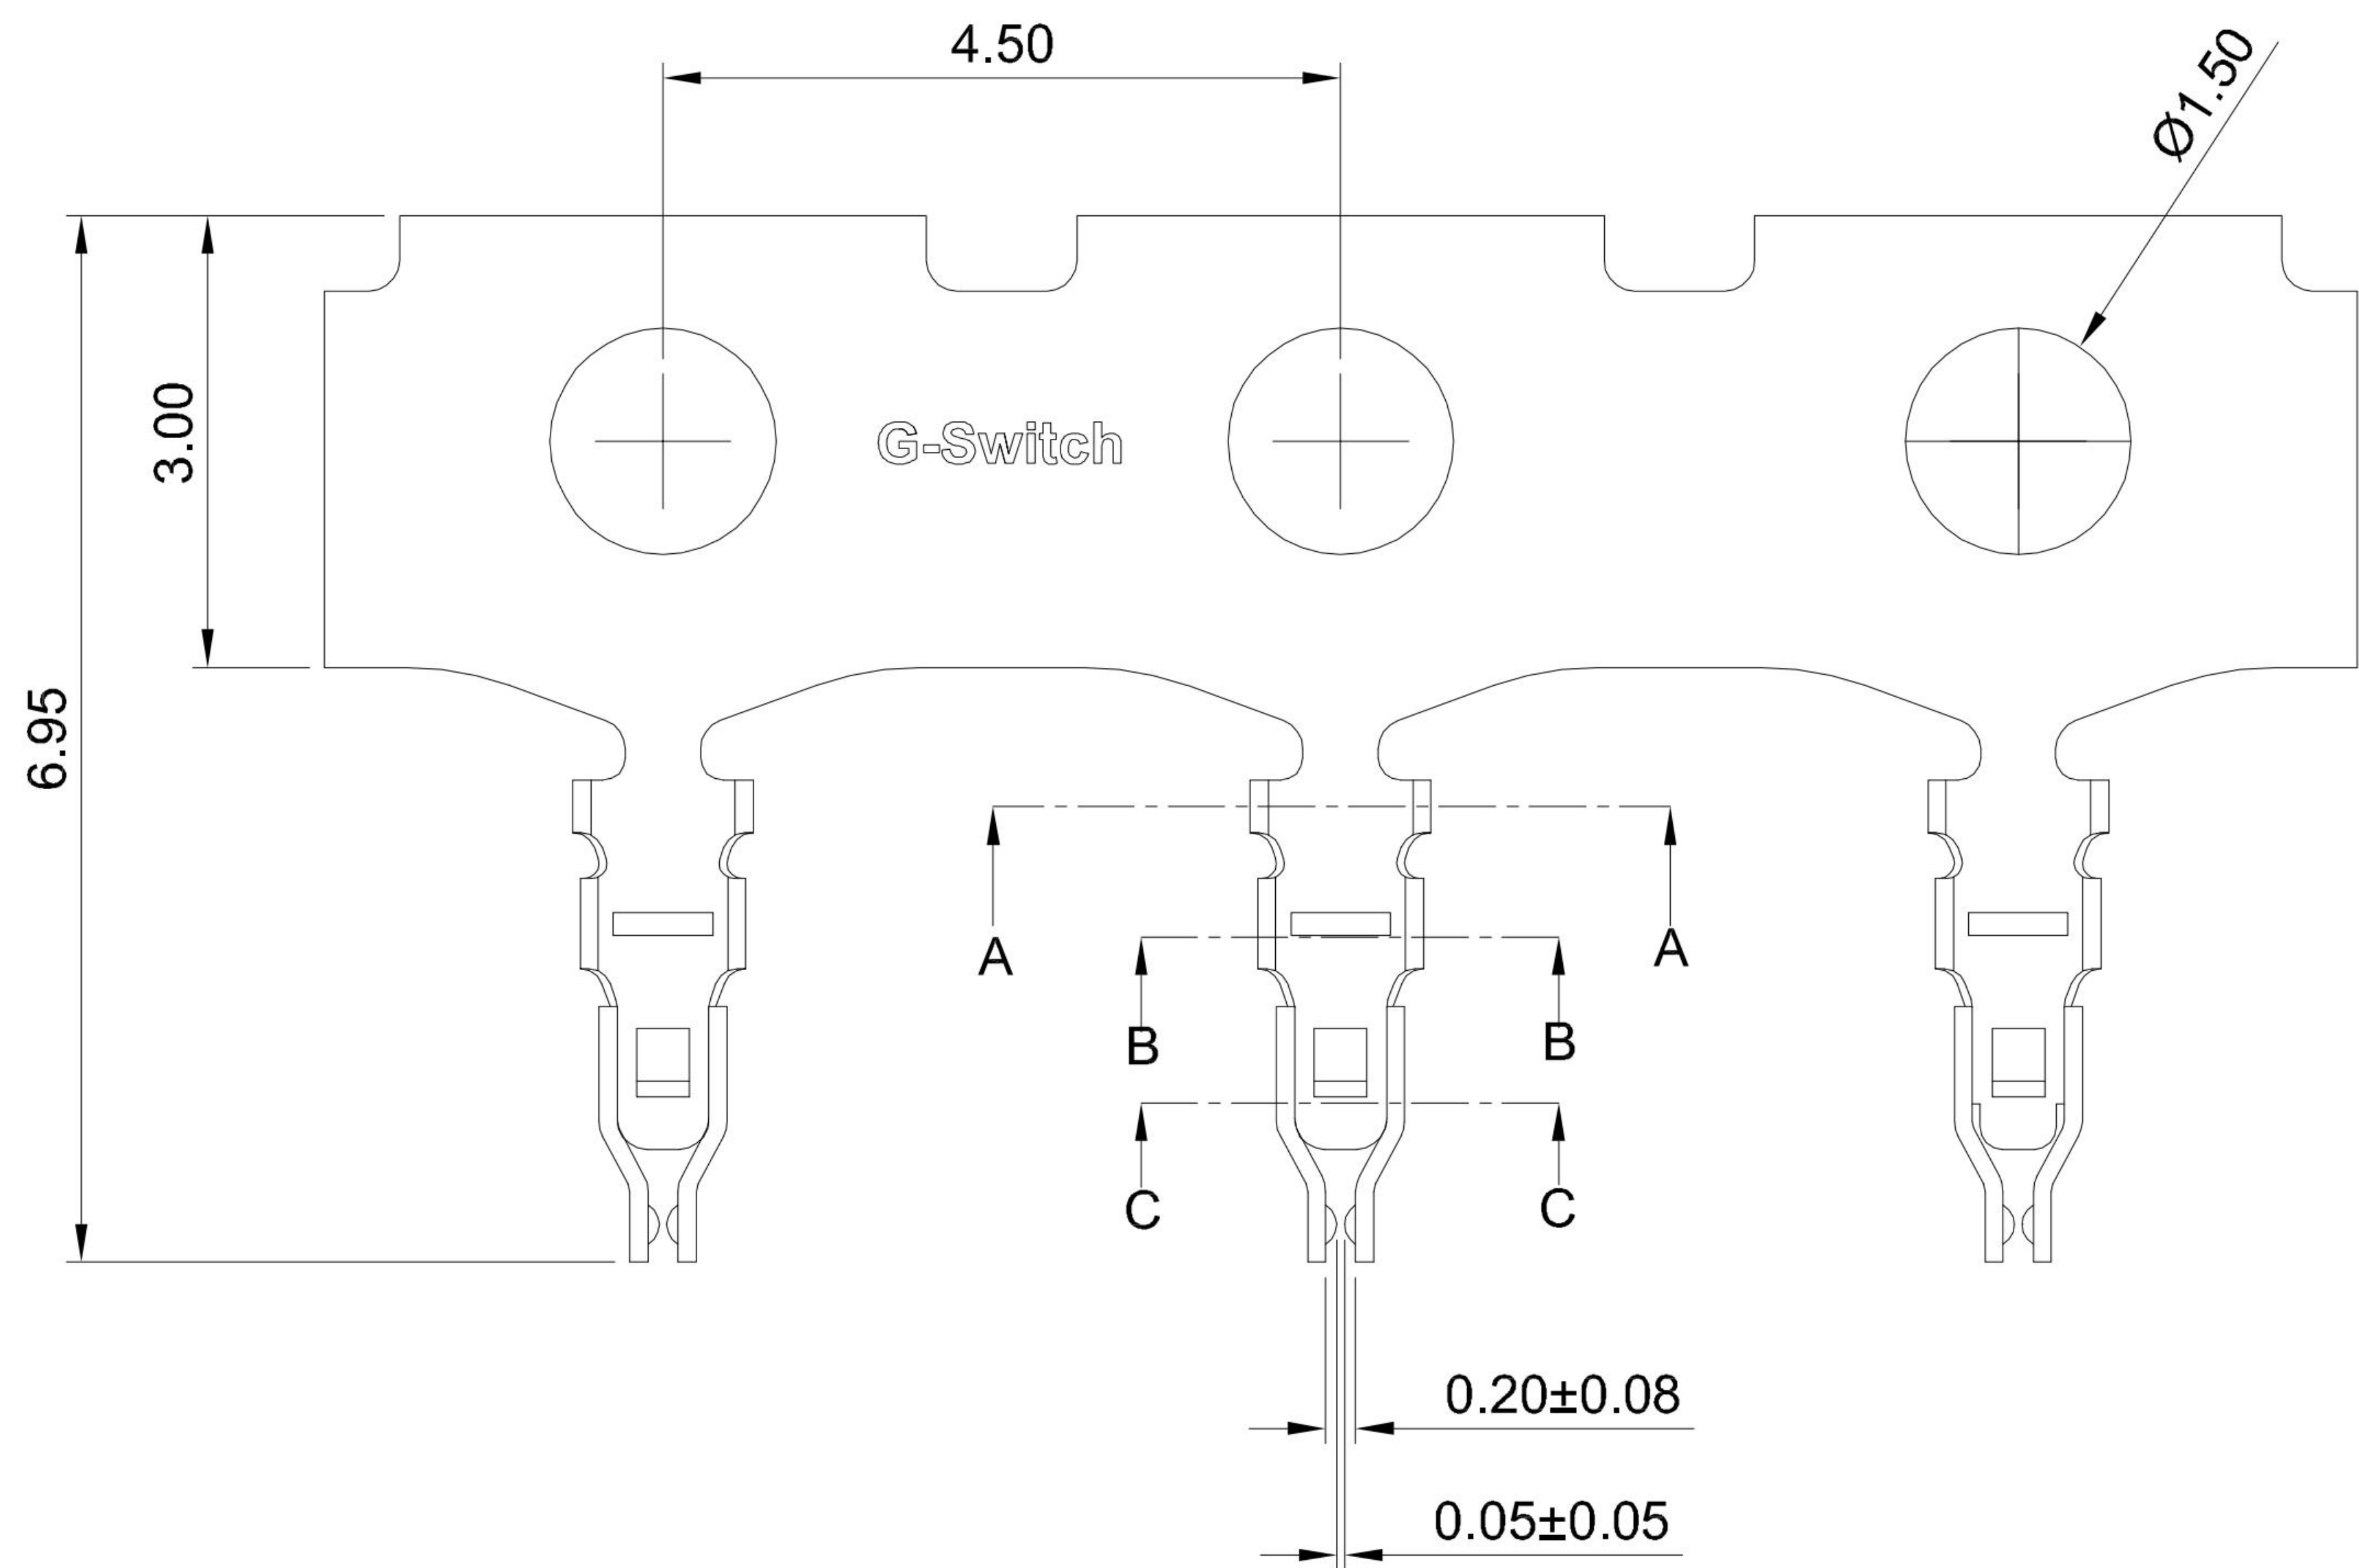


GT-A1201 T F -X XX 1

G-Switch
Series No
Connector T-Terminal


Terminal Plating
BT-Bright Tin
11-All G/F

Metal
P-Phosphor bronze


F-Female

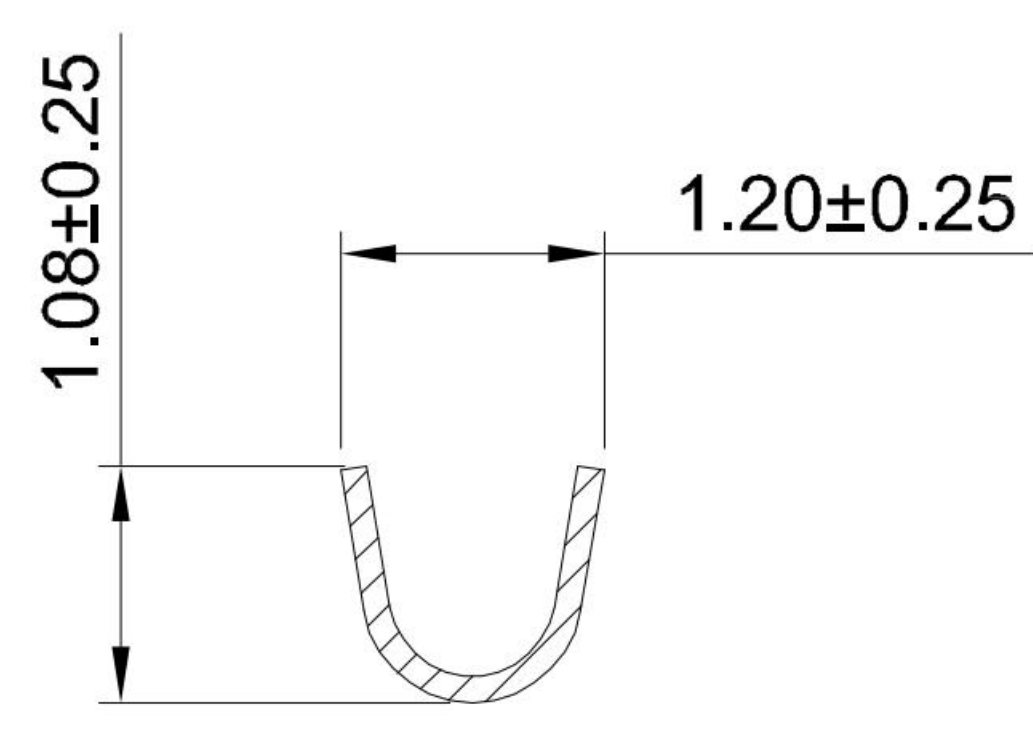

SECION:A-A

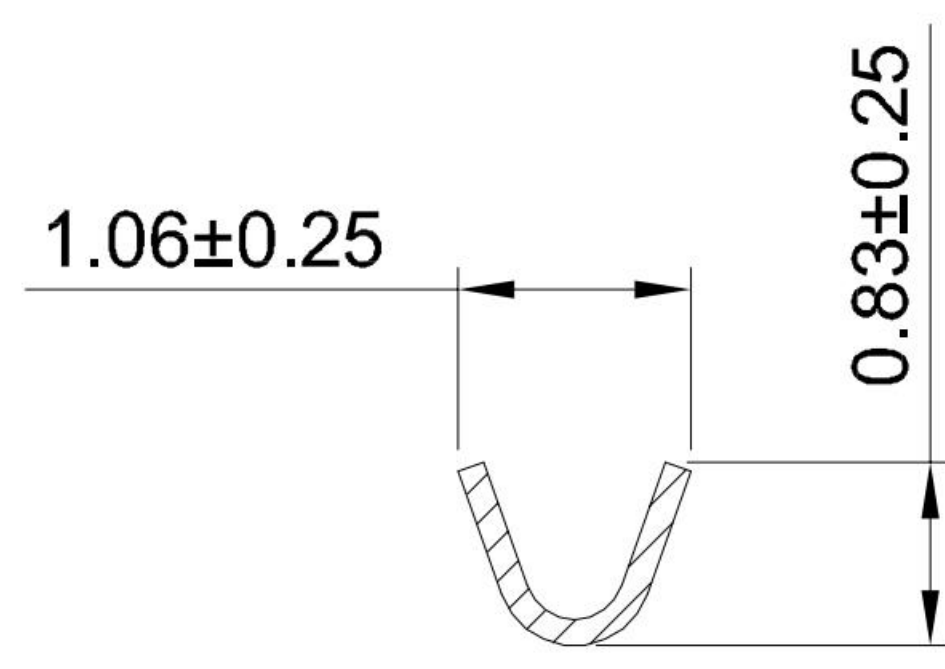

SECION:B-B

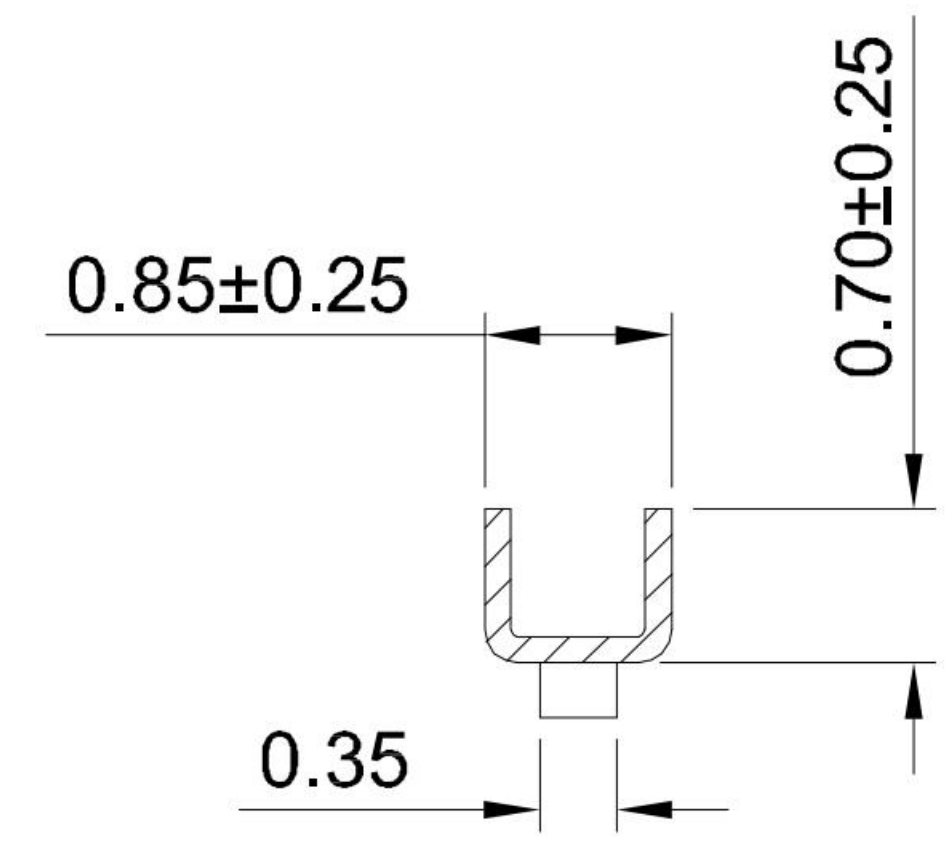

SECION:C-C

- G-Switch Specification:**
- 1.Current rated: 1.5A AC/DC
 - 2.Voltage rating: 50V AC/DC
 - 3.Withstanding voltage: 500V AC
 - 4.Contact resistance: 20mΩ max.
 - 5.Insulation resistance: 100MΩ min
 - 6.Durability cycle: 10Cycles
 - 7.Removal force: 0.05kgf/Pin min
 - 8.Operating temperature range: -25°C ~ +85°C

GT-A1201TF-P111	Phosphor Bronze	All G/F	AWG#28~30	0.70mm(Max)	20000
Part NO	Material	Plating	Wire Size	Insulation O.D	Reel/PCS



SCALE: 1:1	UNIT: mm	Title: Terminal 1.20mm Pitch Crimp Style				 品赞科技®			
SIZE: A4		Molde Code: GT-A1201TF-XXX1							
Unless otherwise General Tolerance: X ±0.40 X.x ±0.30 X.xx ±0.20 X° ±5° X.x° ±3°		DRAWN	CHECKED	APPROVED	DATE				
		Hu	Chen	Chen	2022.12.28	REV: A0	SHEET: 1/1		

A

B

C

D

E