

A B C D E

1

2

3

4

5



1

2

3

4

5

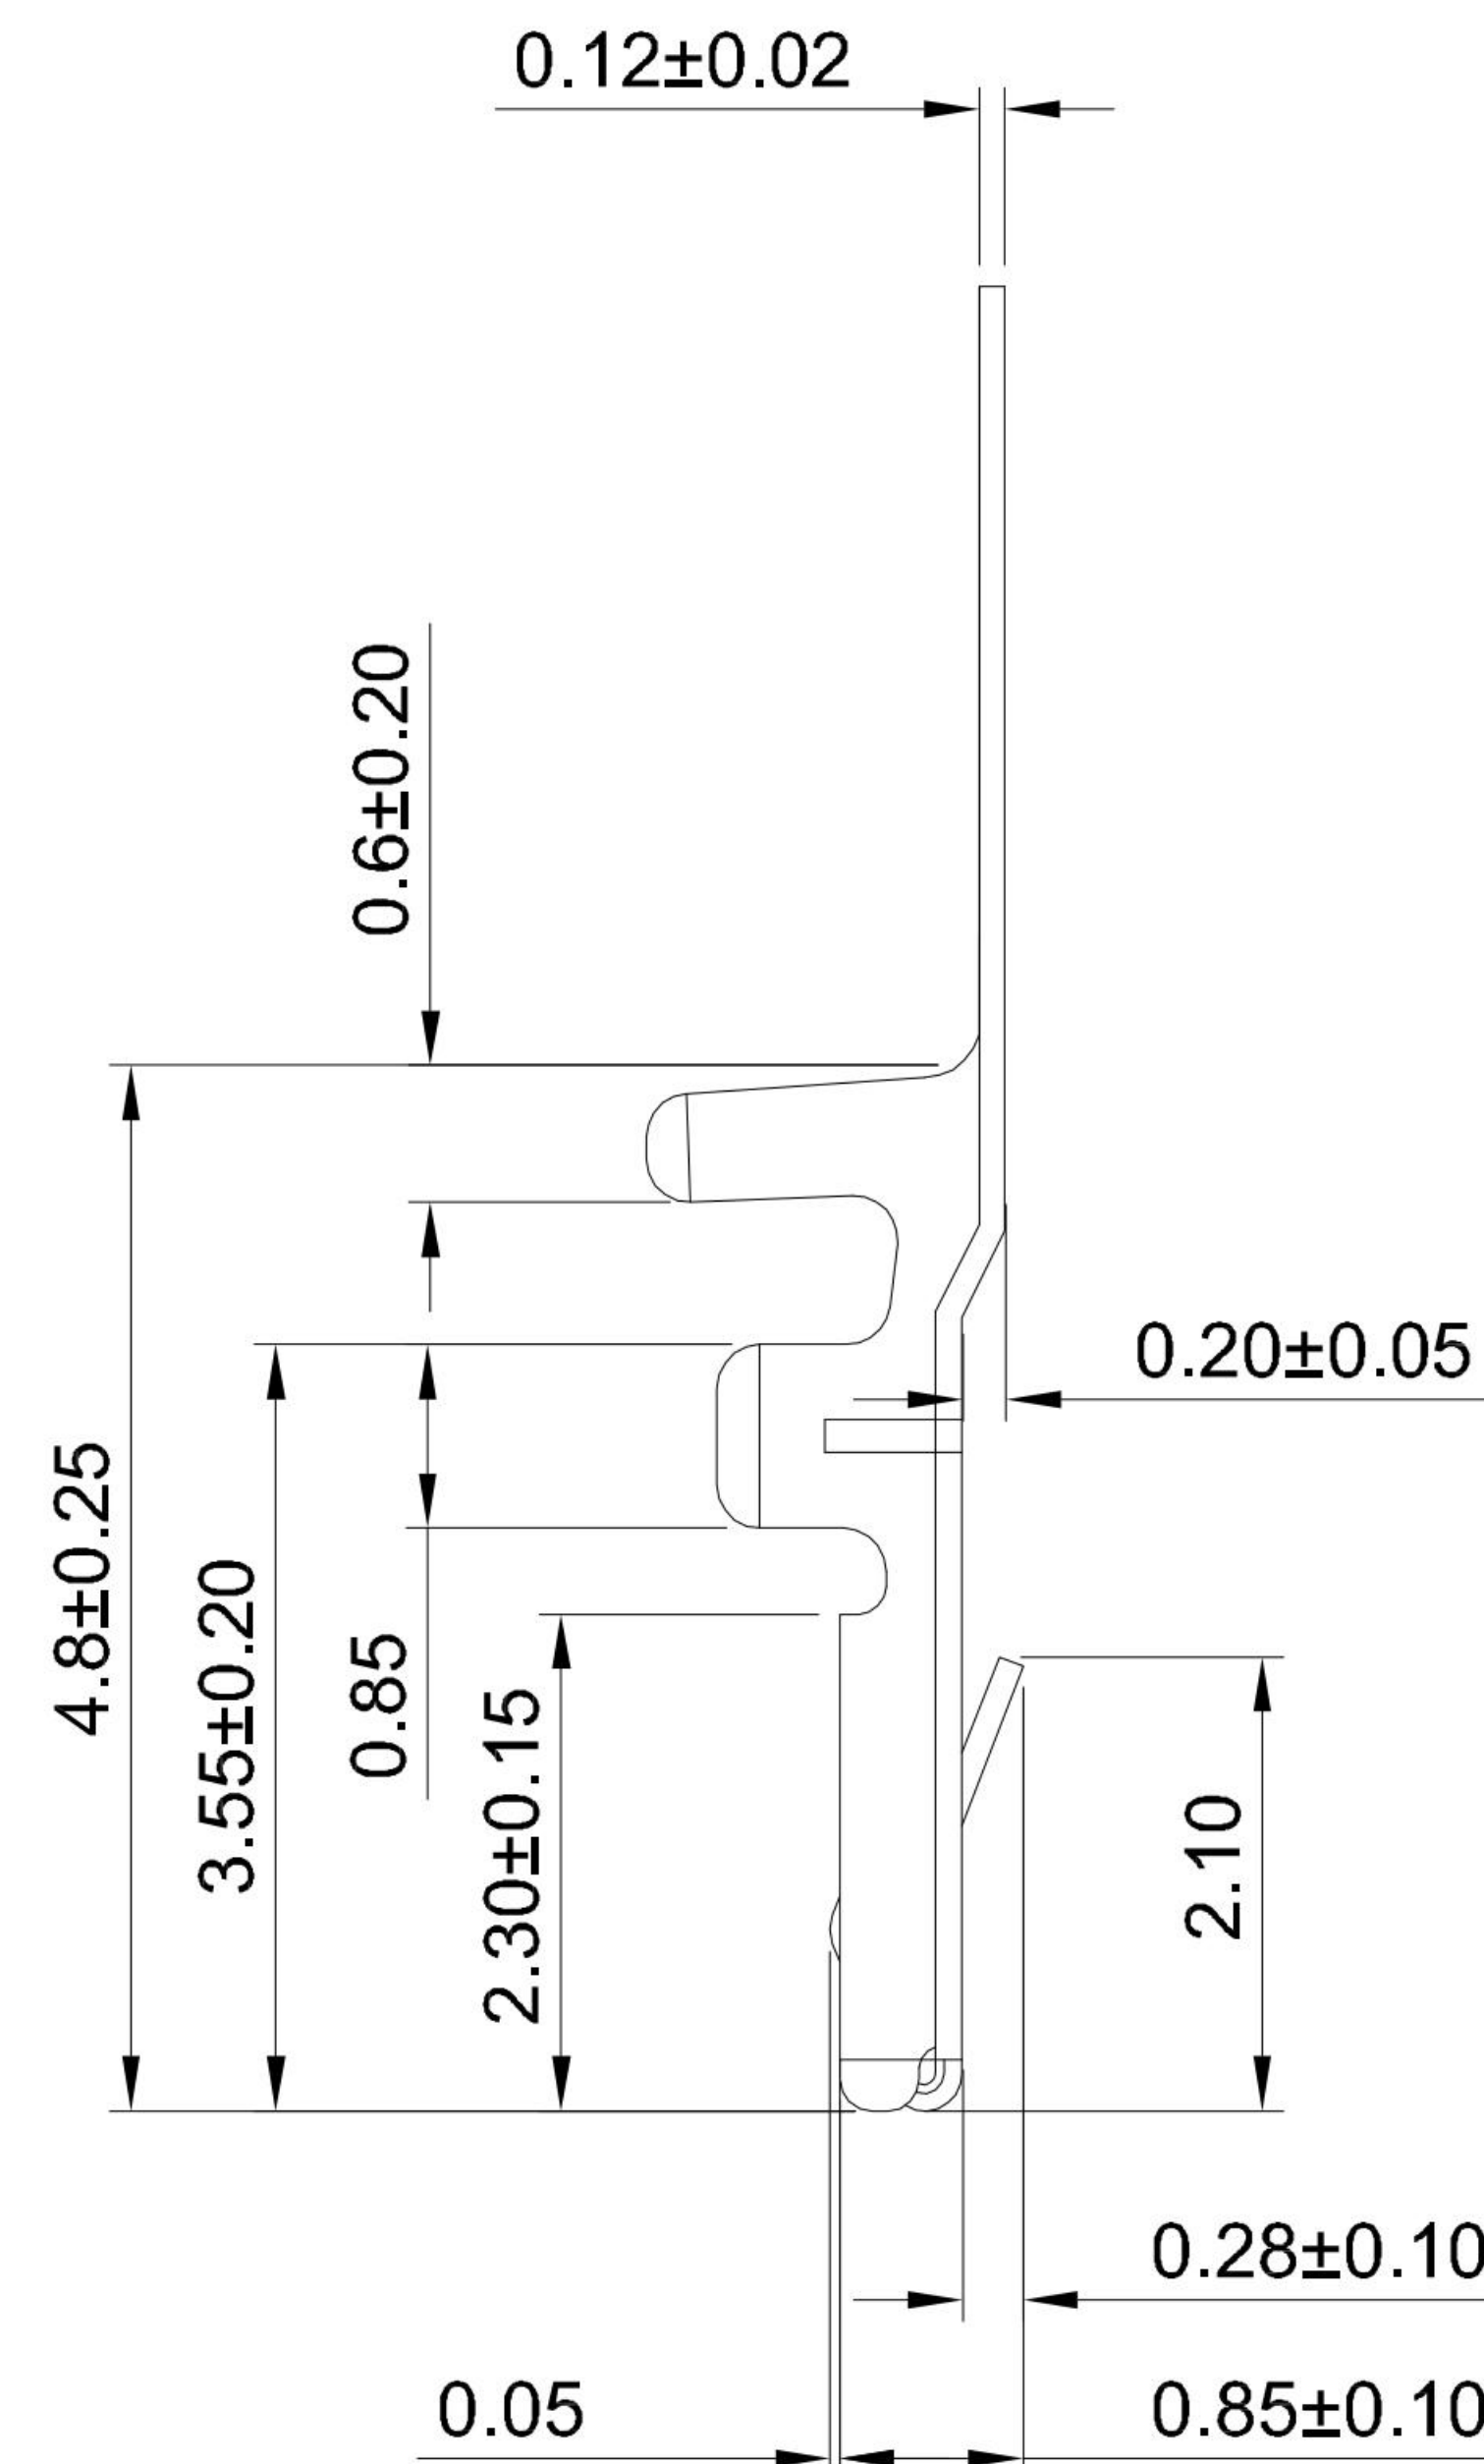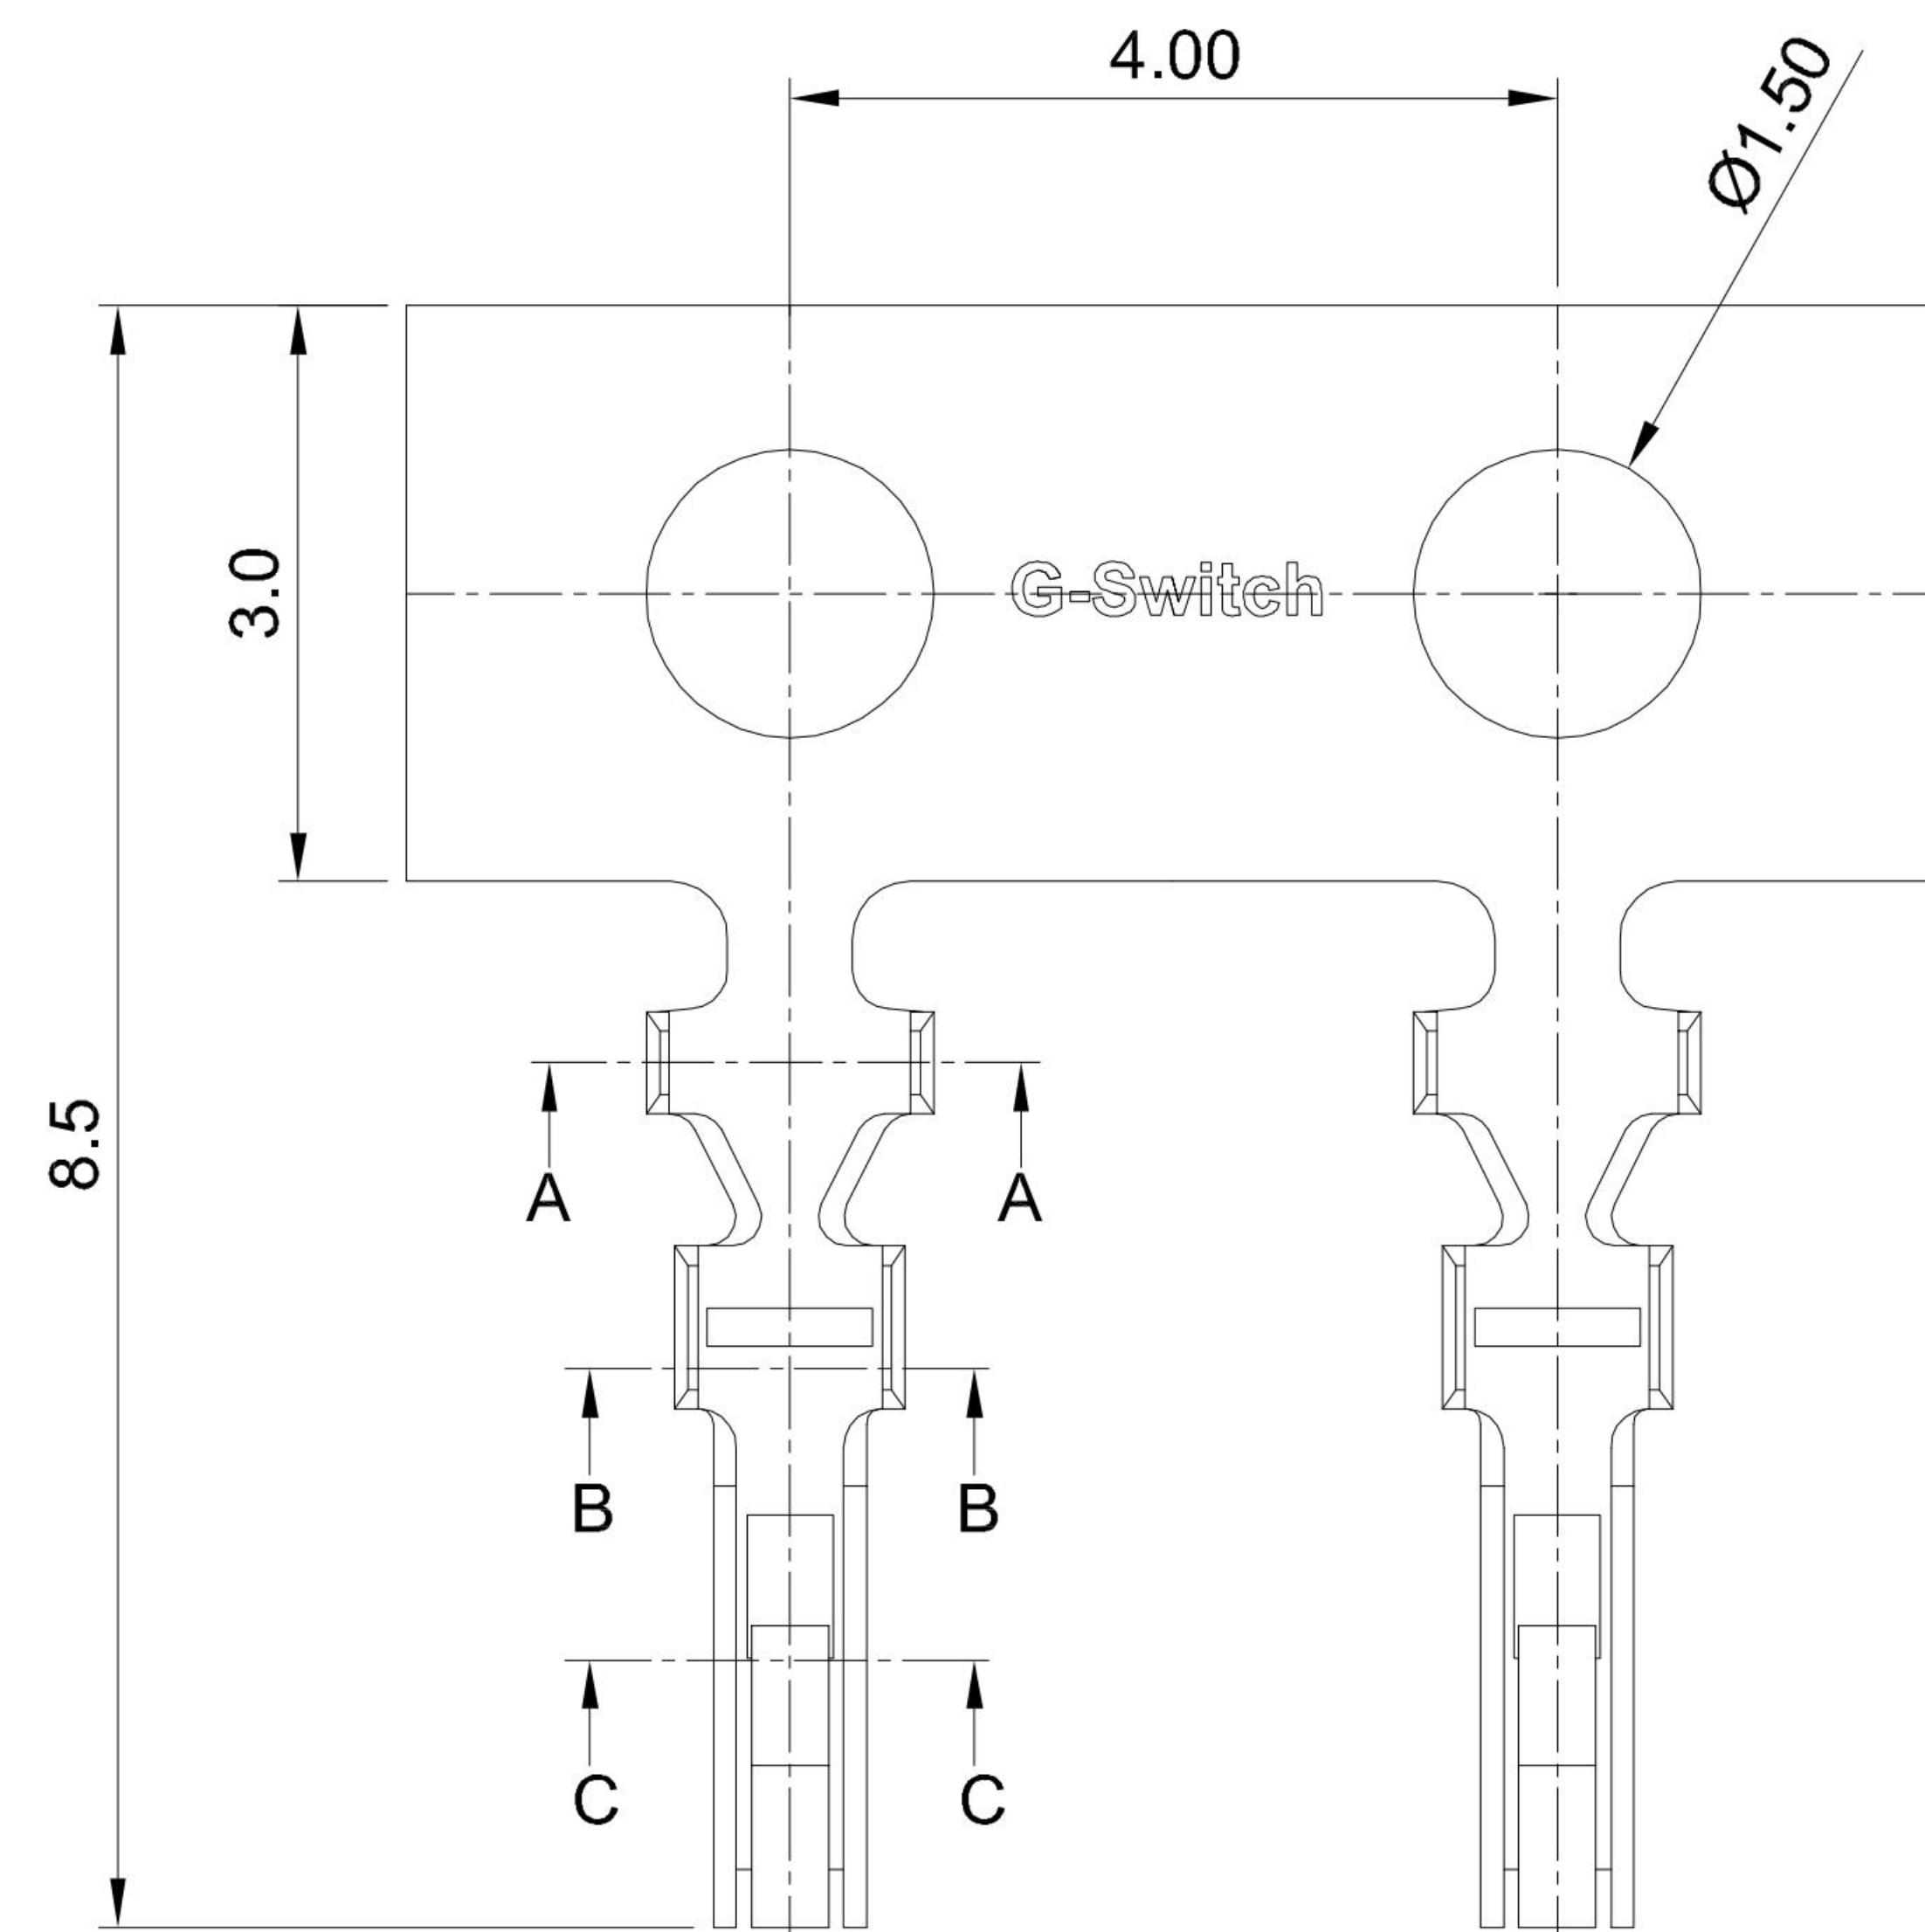

GT-A1257 T F -X XX 1

G-Switch


Series No

Connector
T-Terminal


Terminal Plating
BT-Bright Tin

Metal
P-Phosphor Bronze


F-Female

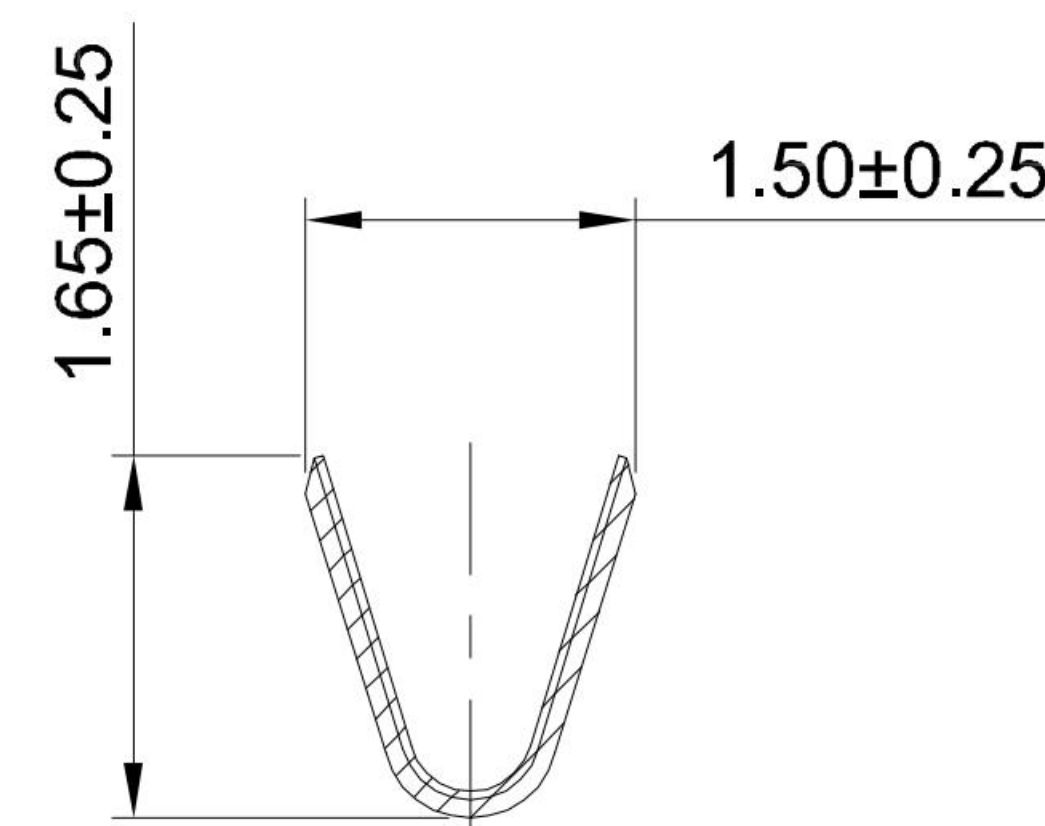

SECTION:A-A

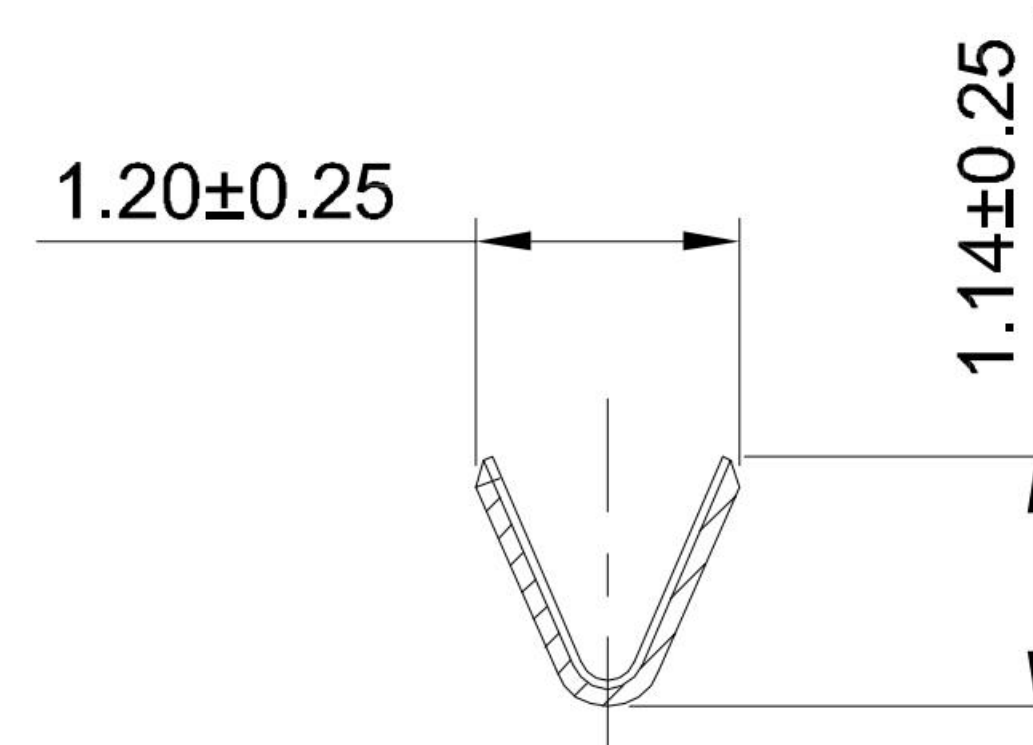

SECTION:B-B

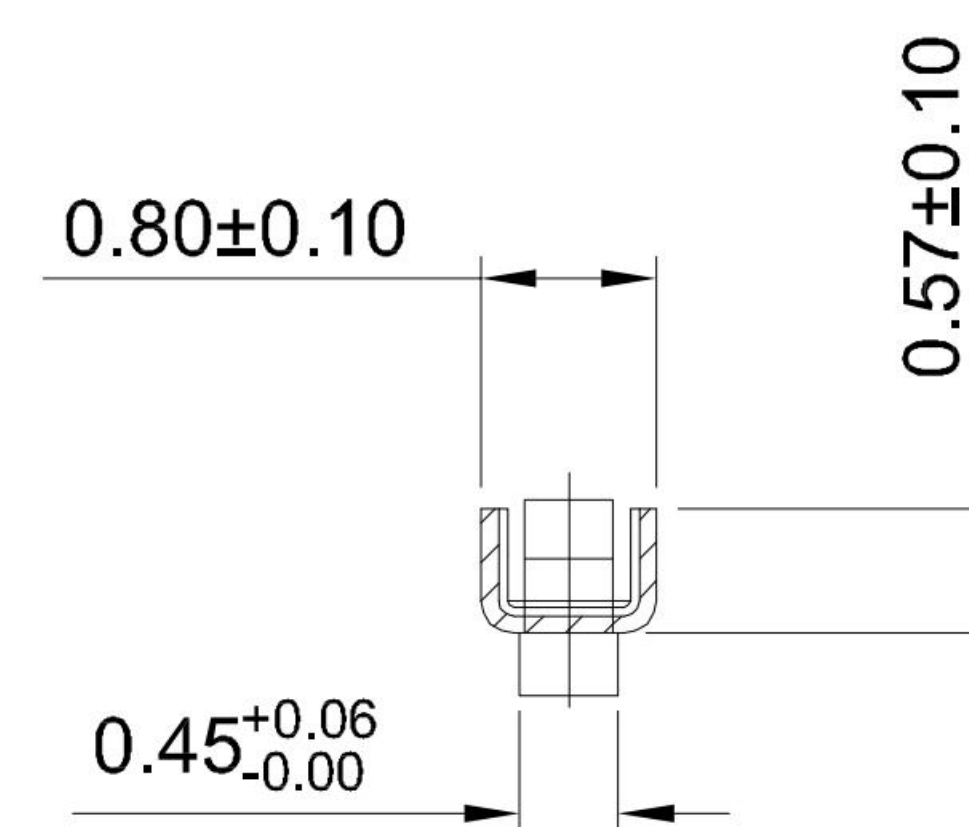

SECTION:C-C

G-Switch Specification:

- 1.Current rated: 1.0A AC/DC
- 2.Voltage rating: 50V AC/DC
- 3.Withstanding voltage: 500V AC
- 4.Contact resistance: 30mΩ max.
- 5.Insulation resistance: 100MΩ min
- 6.Durability cycle: 30Cycles
- 7.Removal force: 0.50kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

GT-A1257TF-PBT1	Phosphor Bronze	Bright Tin	AWG#26~32	1.00mm(Max)	25000
Part NO	Material	Plating	Wire Size	Insulation O.D	Reel/PCS



SCALE: 1:1	UNIT: mm	Title: Terminal 1.25mm Pitch GH Crimp Style			
SIZE: A4		Molde Code: GT-A1257TF-XXX1			
Unless otherwise General Tolerance:		DRAWN	CHECKED	APPROVED	DATE
X ±0.40		Hu	Chen	Chen	2022.12.28
X.x ±0.30					
X.xx ±0.20					
X° ±5°					
X.x° ±3°					



REV: A0 SHEET: 1/1

A B C D E