

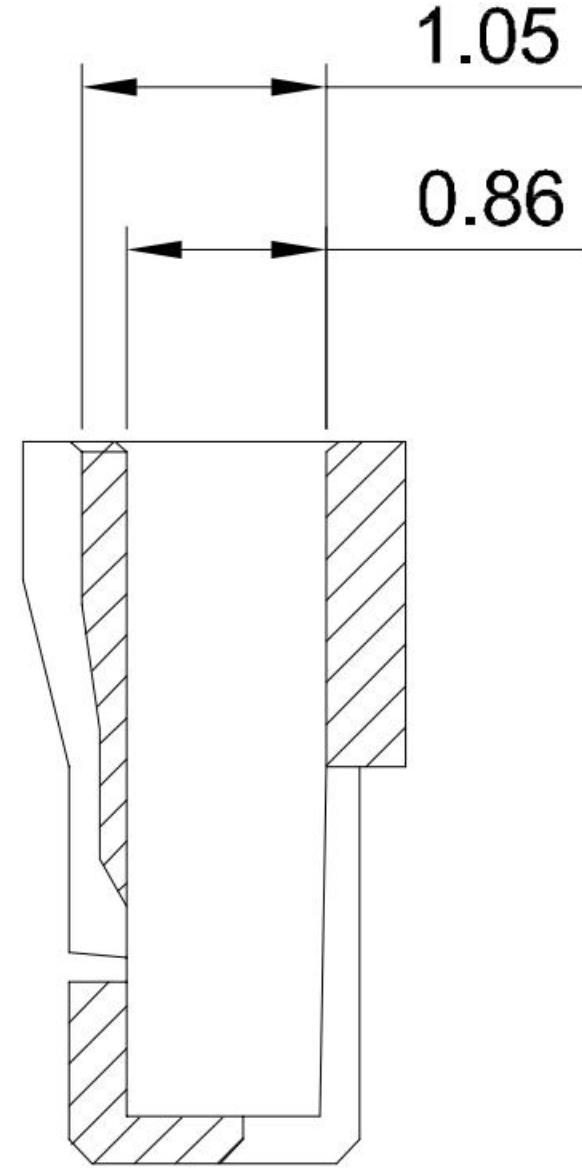
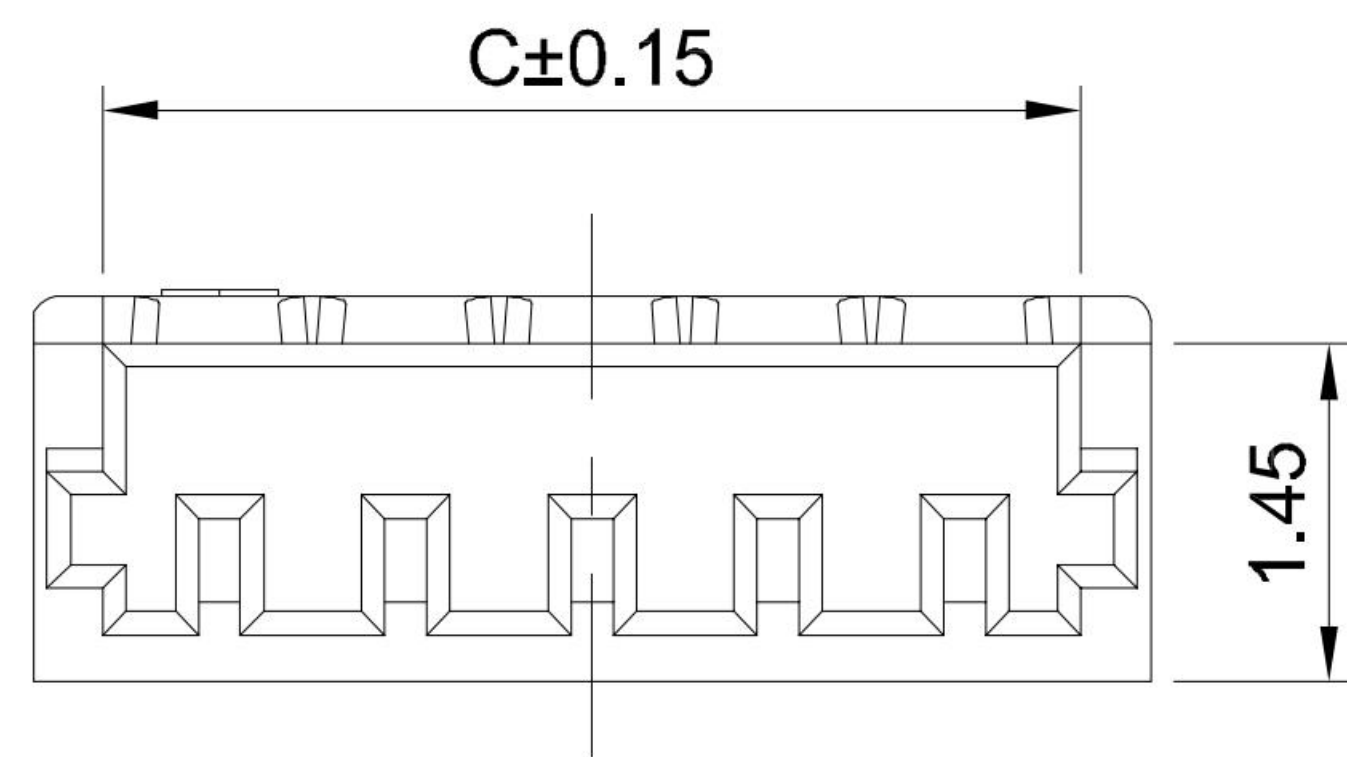
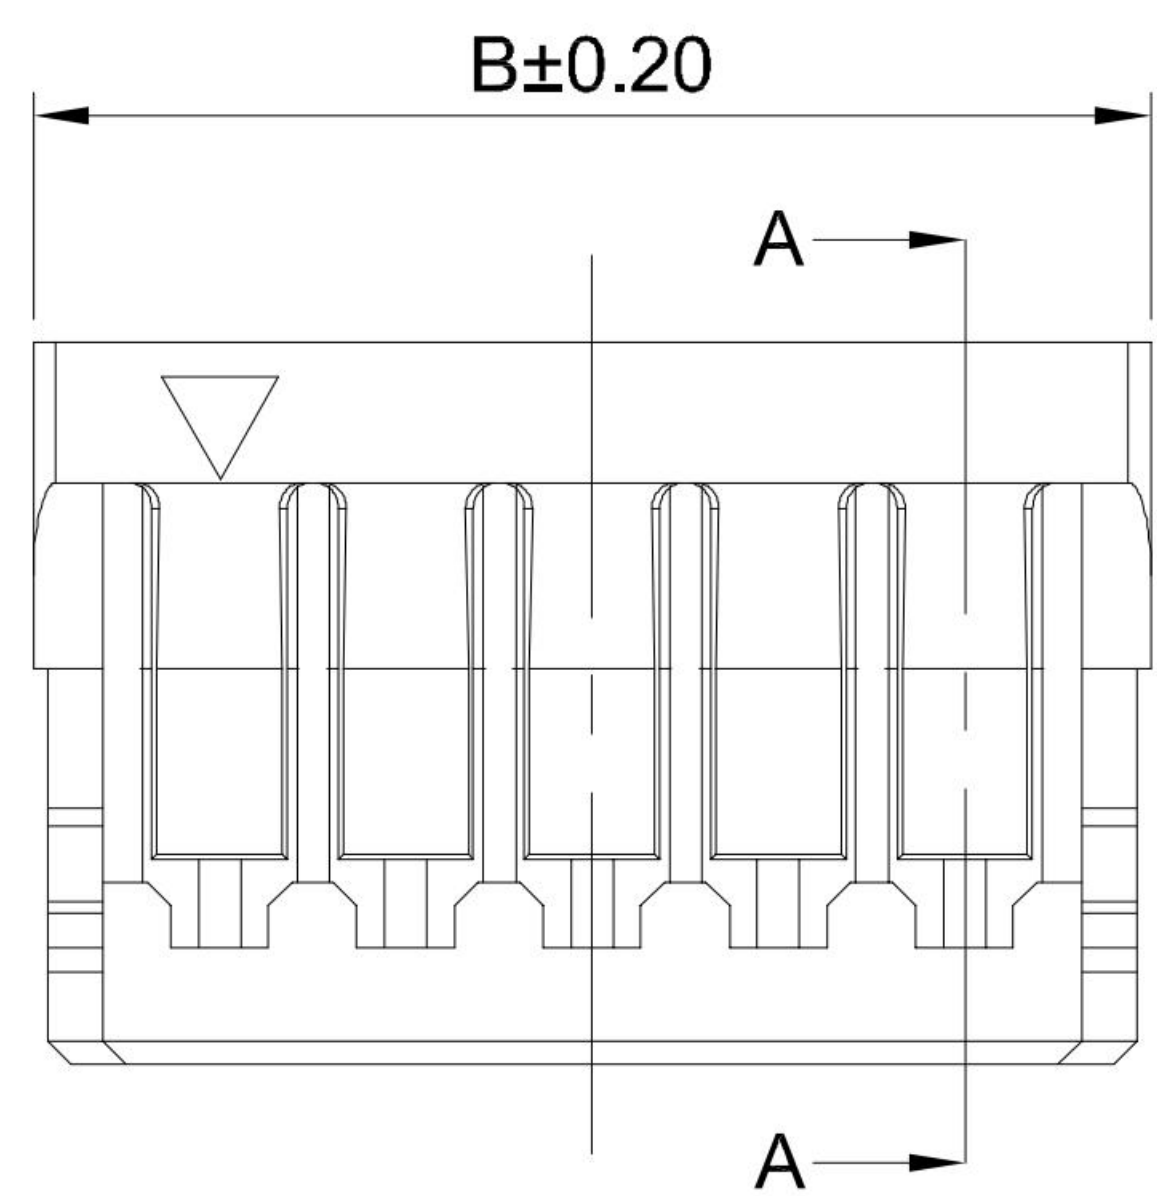
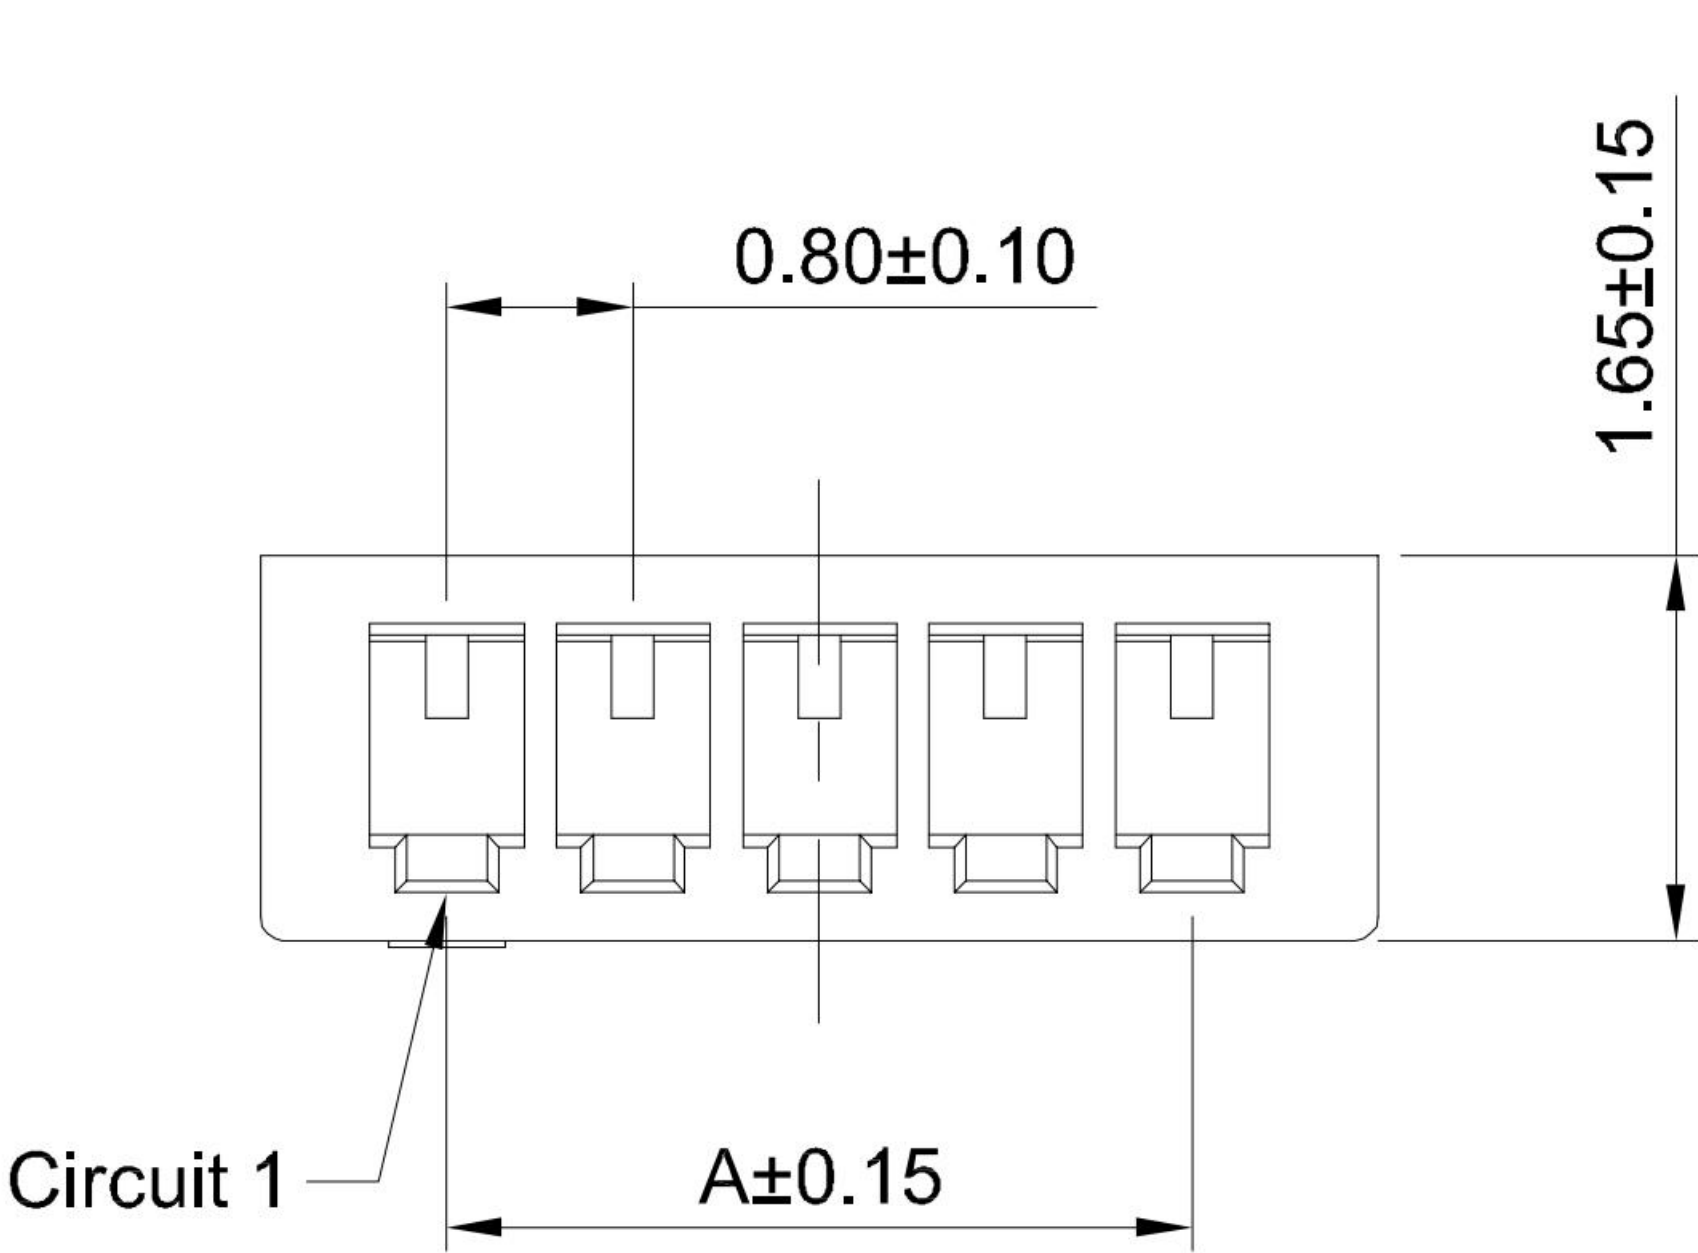


1
2
3
4
5

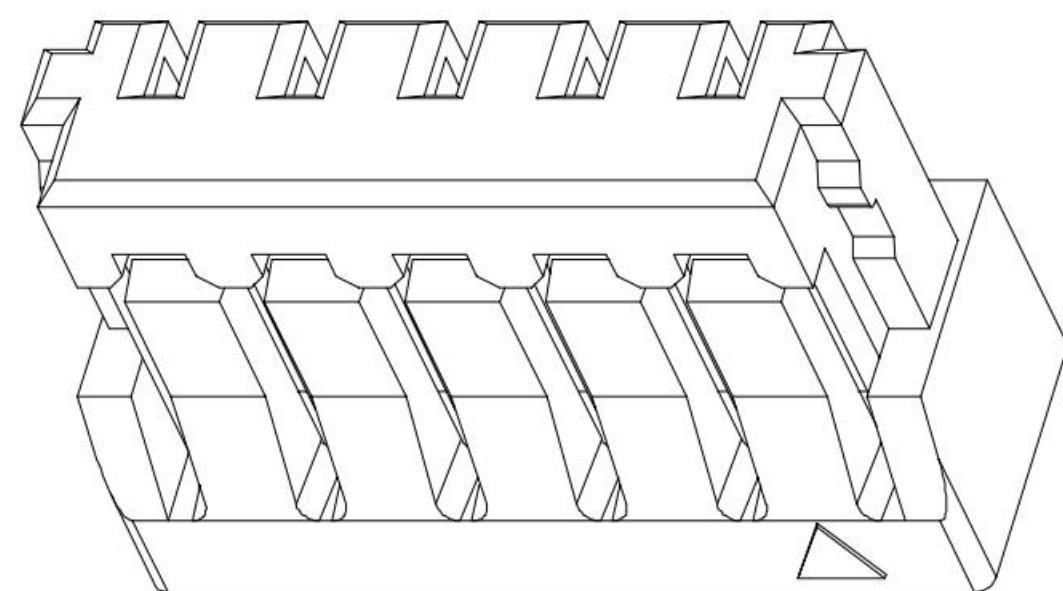

SECTION:A-A

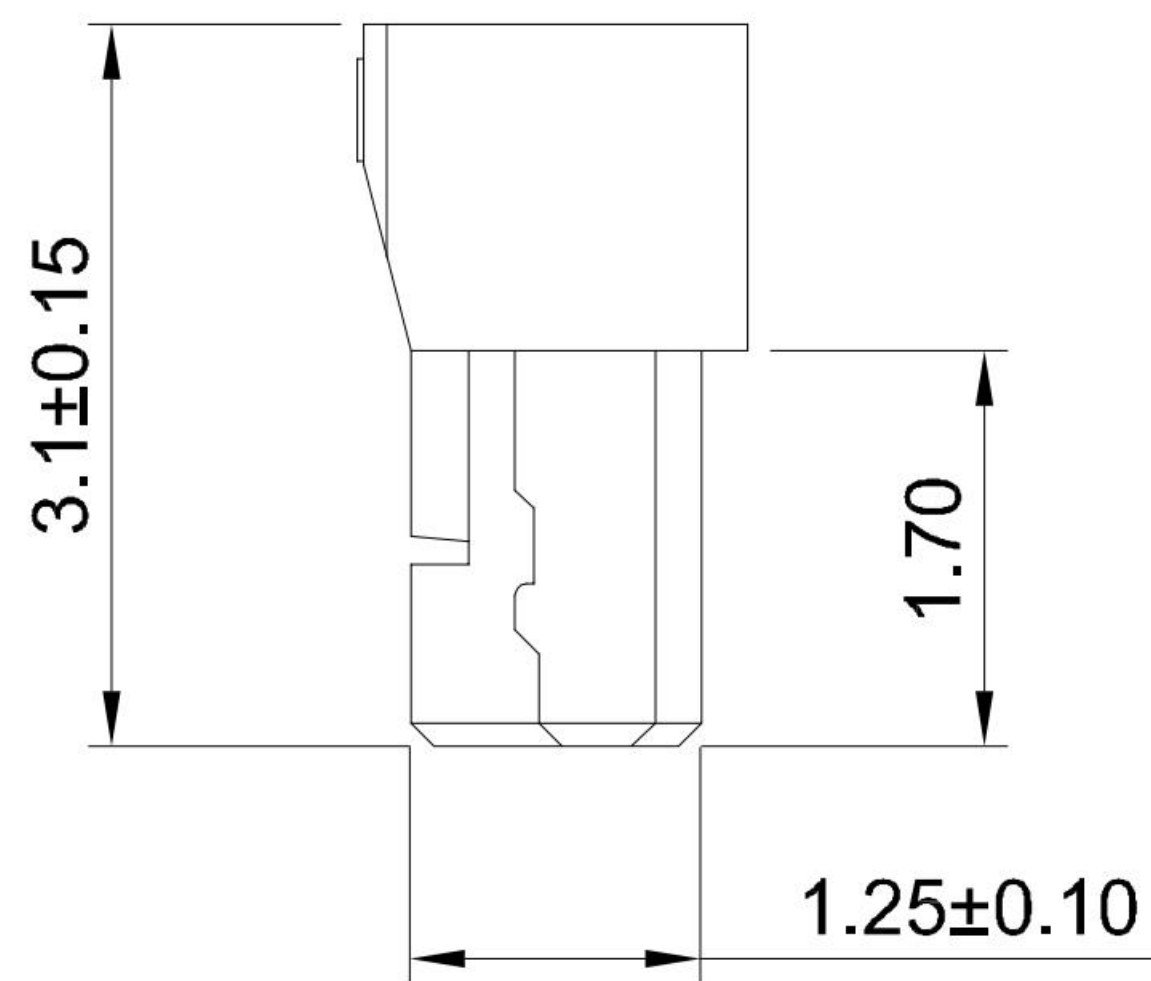

- G-Switch Specification:**
- 1.Current rated: 0.5A AC/DC
 - 2.Voltage rating: 30V AC/DC
 - 3.Withstanding voltage: 200V AC
 - 4.Contact resistance: 30mΩ max.
 - 5.Insulation resistance: 100MΩ min
 - 6.Durability cycle: 30Cycles
 - 7.Removal force: 0.50kgf/Pin min
 - 8.Operating temperature range: -40°C ~ +105°C



GT-D0801 H M 1 -1 XX X 0X

- G-Switch**
- Series No**
- Connector**
H-Housing
- M-Male**
- Type**
1-Type 1
- Material**
01-PA46
02-LCP
- Housing Colour**
S-Nature
- Pin Q' PY**
02~20
- Row NO**
1-Single Row

Ordering Information:

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
02	---	2.80	1.80	12	8.80	10.40	9.80
03	1.60	3.20	2.60	13	9.60	11.20	10.60
04	2.40	4.00	3.40	14	10.40	12.00	11.40
05	3.20	4.80	4.20	15	11.20	12.80	12.20
06	4.00	5.60	5.00	16	12.00	13.60	13.00
07	4.80	6.40	5.80	17	12.80	14.40	13.80
08	5.60	7.20	6.60	18	13.60	15.20	14.60
09	6.40	8.00	7.40	19	14.40	16.00	15.40
10	7.20	8.80	8.20	20	15.20	16.80	16.20
11	8.00	9.60	9.00	---	---	---	---

1	HOUSING	PA46,94V-0/LCP,94V-0	NATURE
NO.	PART NAME	MATERIAL	REMARK



SCALE: 1:1	UNIT: mm	Title: Housing 0.80mm Pitch SUR Single Row Male			
SIZE: A4		Molde Code: GT-D0801HM1-1XXX0X			
Unless otherwise General Tolerance: X ±0.40 X.x ±0.30 X.xx ±0.20 X° ±5° X.x° ±3°		DRAWN	CHECKED	APPROVED	DATE
		Hu	Hu	Chen	2021.10.20



REV: A0 SHEET: 1/1

1
2
3
4
5