
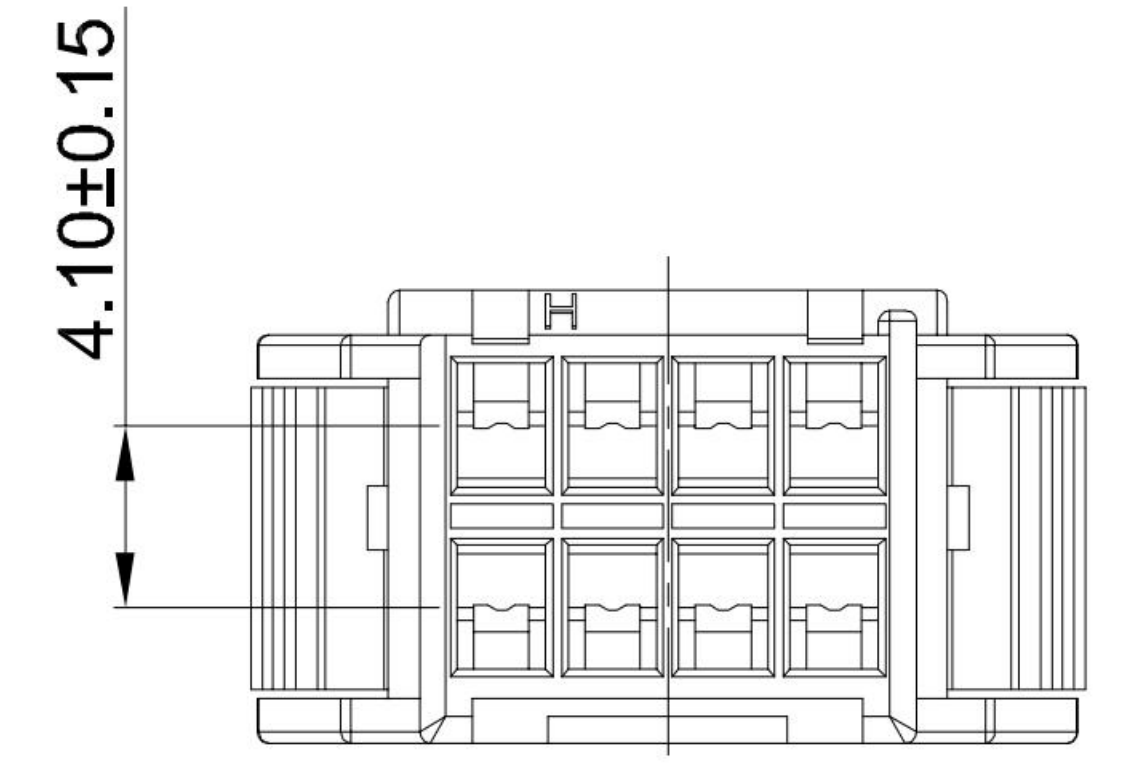
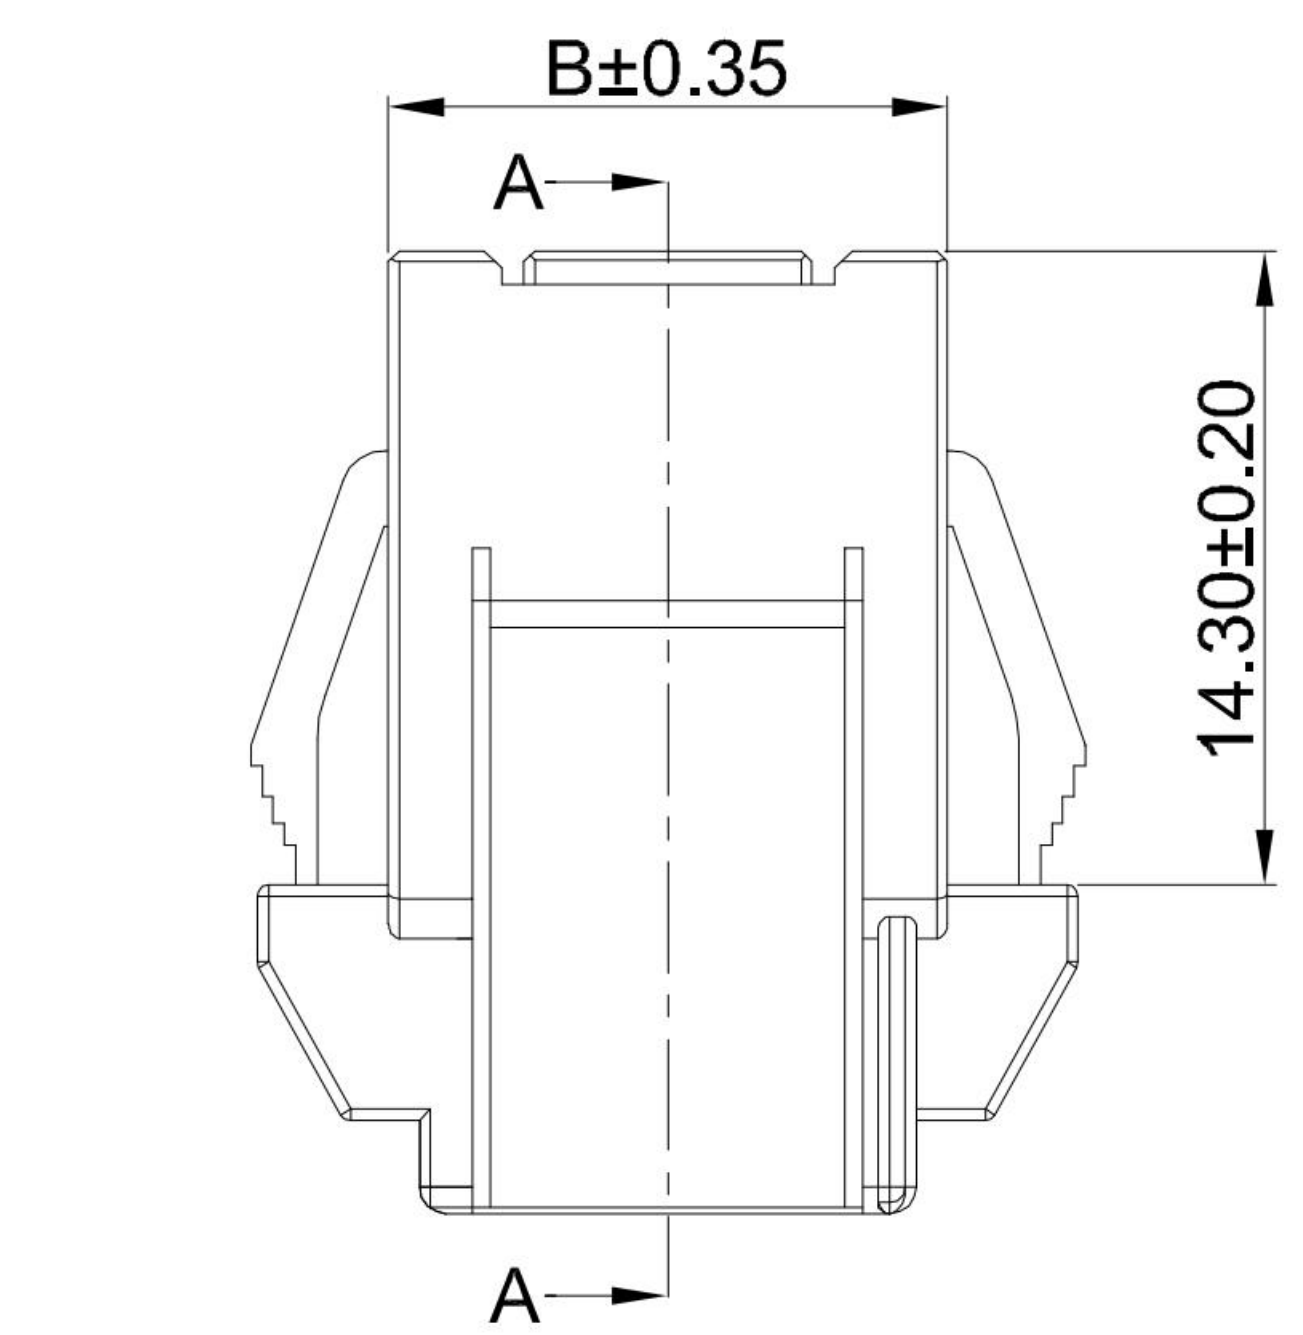
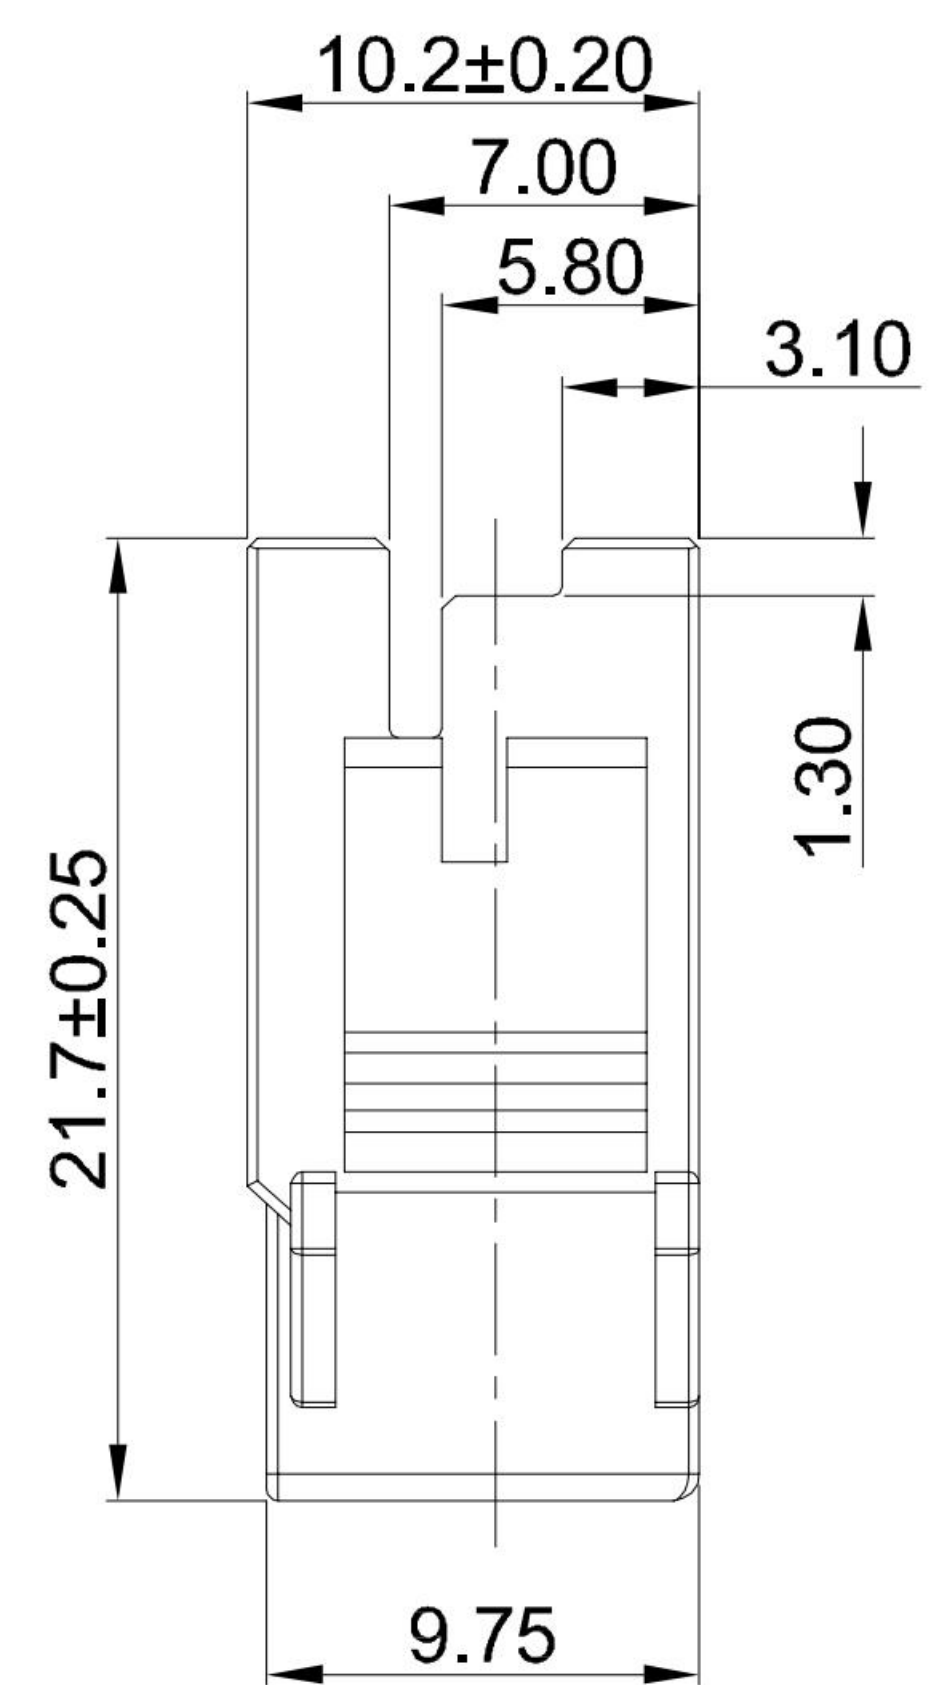
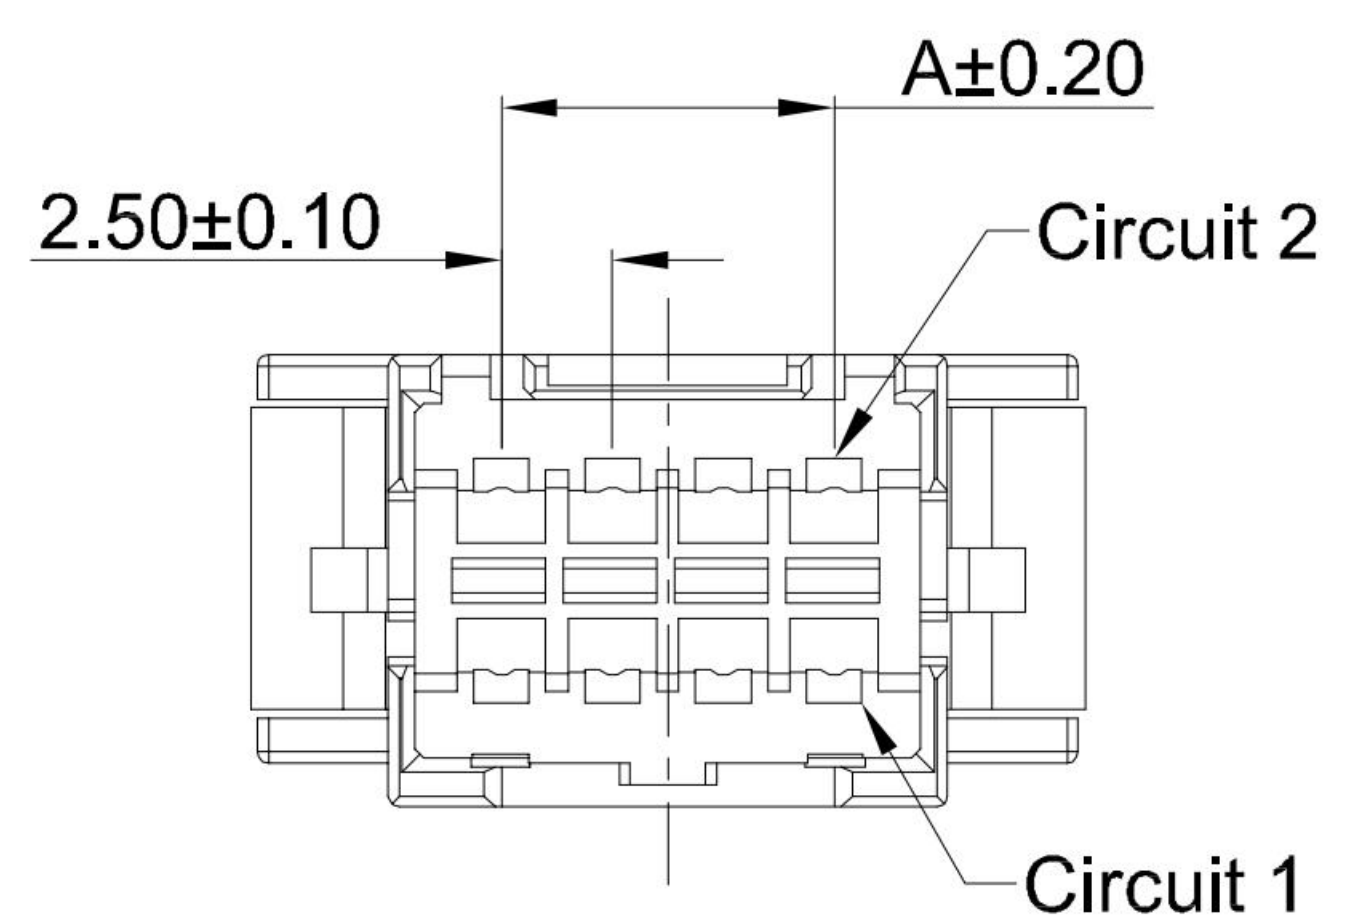
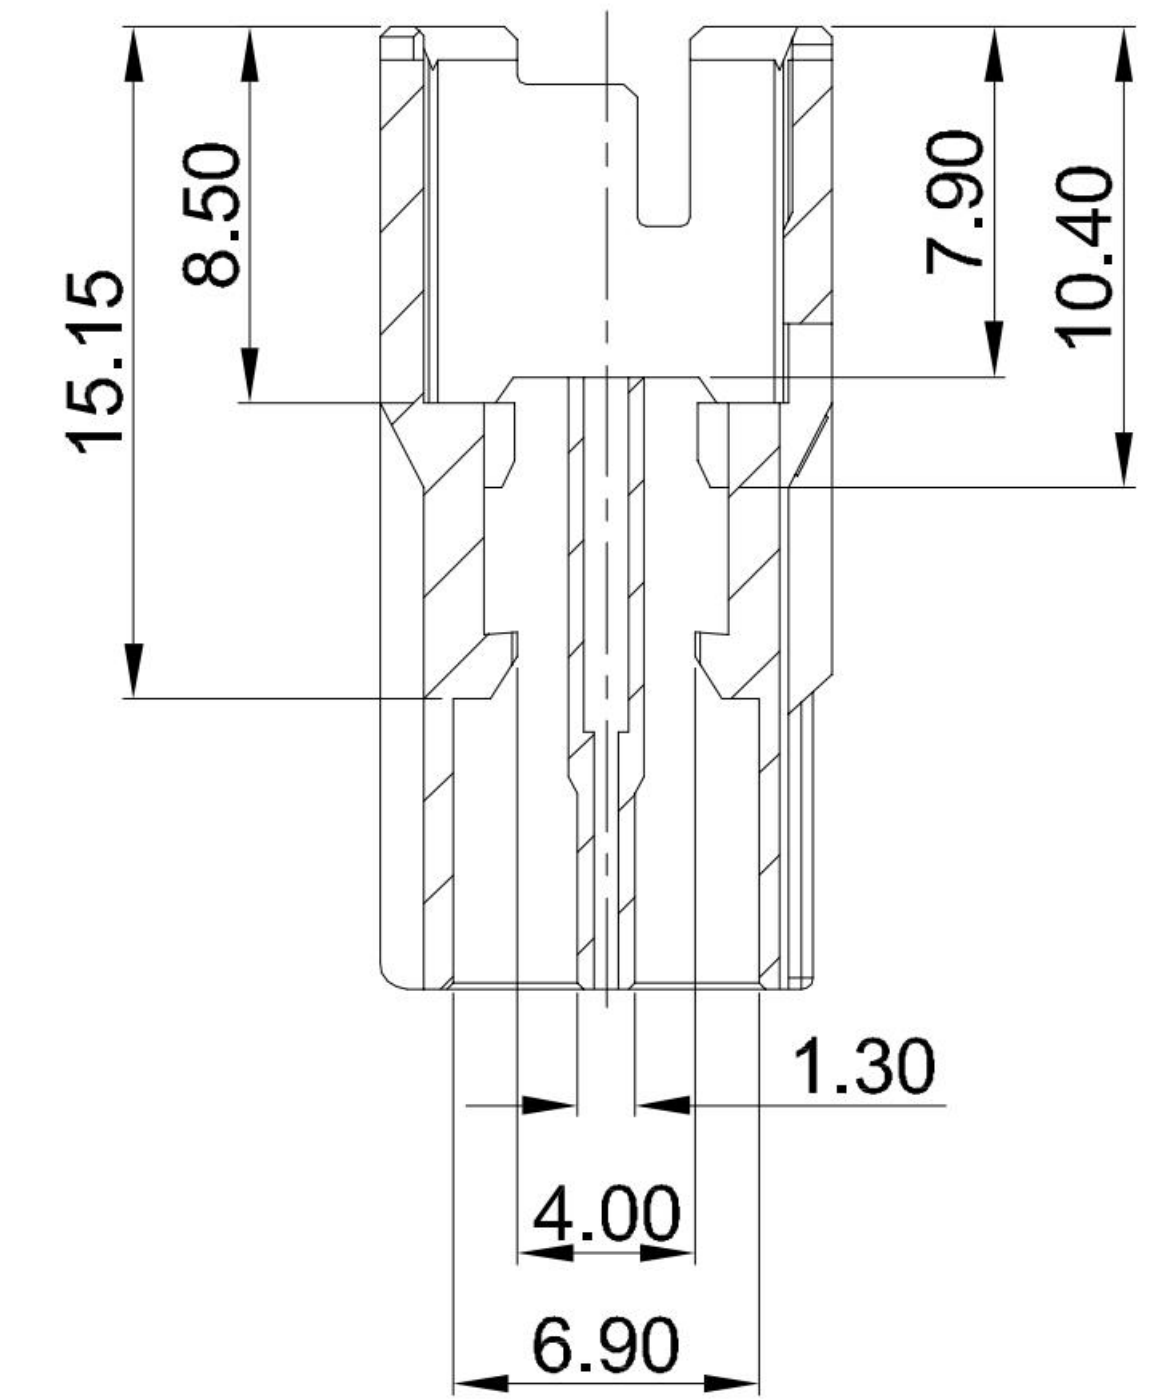


1
2
3
4
5

A B C D E

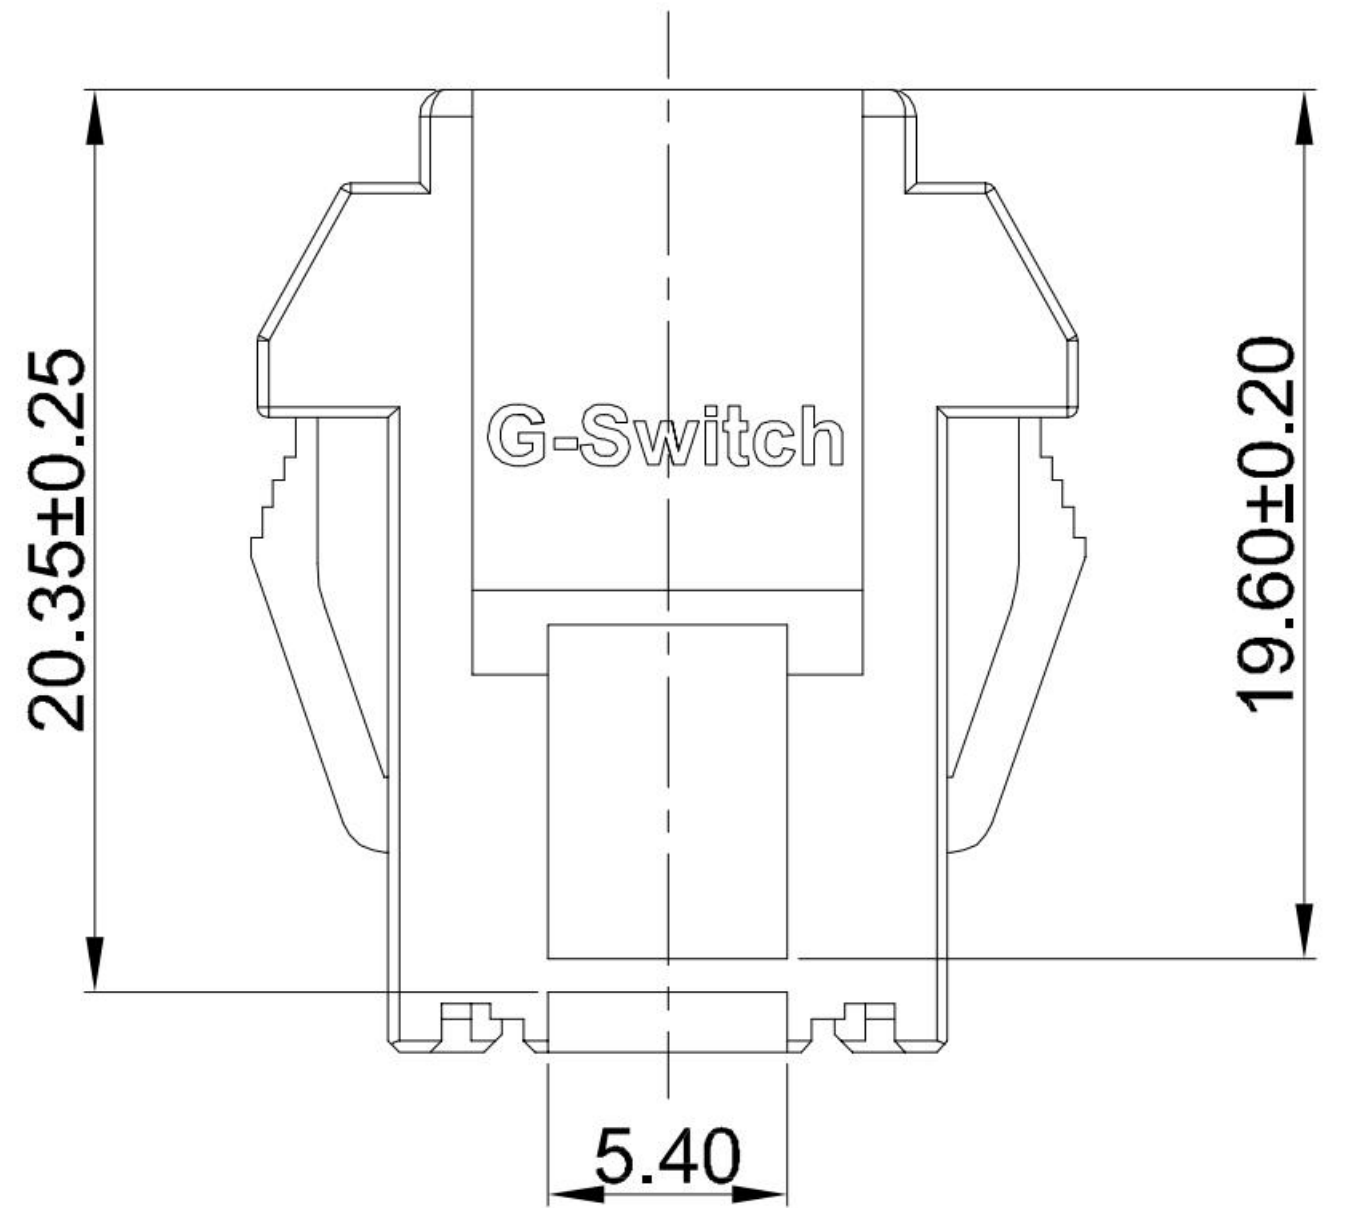

GT-A2508 H F -2 XX X 01

G-Switch
Series No
Connector
H-Housing
F-Female
Housing Colour
W-WHITE
Pin Q' PY
08~40
Row NO
2-Dual Rows

- G-Switch Specification:**
- 1.Current rated: 3.0A AC/DC
 - 2.Voltage rating: 250V AC/DC
 - 3.Withstanding voltage: 1000V AC
 - 4.Contact resistance: 10mΩ max.
 - 5.Insulation resistance: 1000MΩ min
 - 6.Durability cycle: 50Cycles
 - 7.Removal force: 2.0kgf/Pin min
 - 8.Operating temperature range: -25°C ~ +85°C

Circuit		Dimensions(mm)		Circuit	Dimensions(mm)	
		A	B		A	B
08		7.50	12.70	24	27.50	32.70
10		10.00	15.20	26	30.00	35.20
12		12.50	17.70	28	32.50	37.70
14		15.00	20.20	30	35.00	40.20
16		17.50	22.70	32	37.50	42.70
18		20.00	25.20	34	40.00	45.20
20		22.50	27.70	36	42.50	47.70
22		25.00	30.20	40	47.50	52.70

1	HOUSING	PA66,94V-0	WHITE
NO.	PART NAME	MATERIAL	REMARK



SCALE: 1:1	UNIT: mm	Title: Housing 2.50mm Pitch XAD Dual Rows With Lock Female			
SIZE: A4					
Unless otherwise General Tolerance: X ±0.40 X.x ±0.30 X.xx ±0.20 X° ±5° X.x° ±3°		Molde Code: GT-A2508HF-2XXX01			
		DRAWN	CHECKED	APPROVED	DATE
		Hu	Hu	Chen	2021.10.20



REV: A0 SHEET: 1/1

A B C D E

1
2
3
4
5