


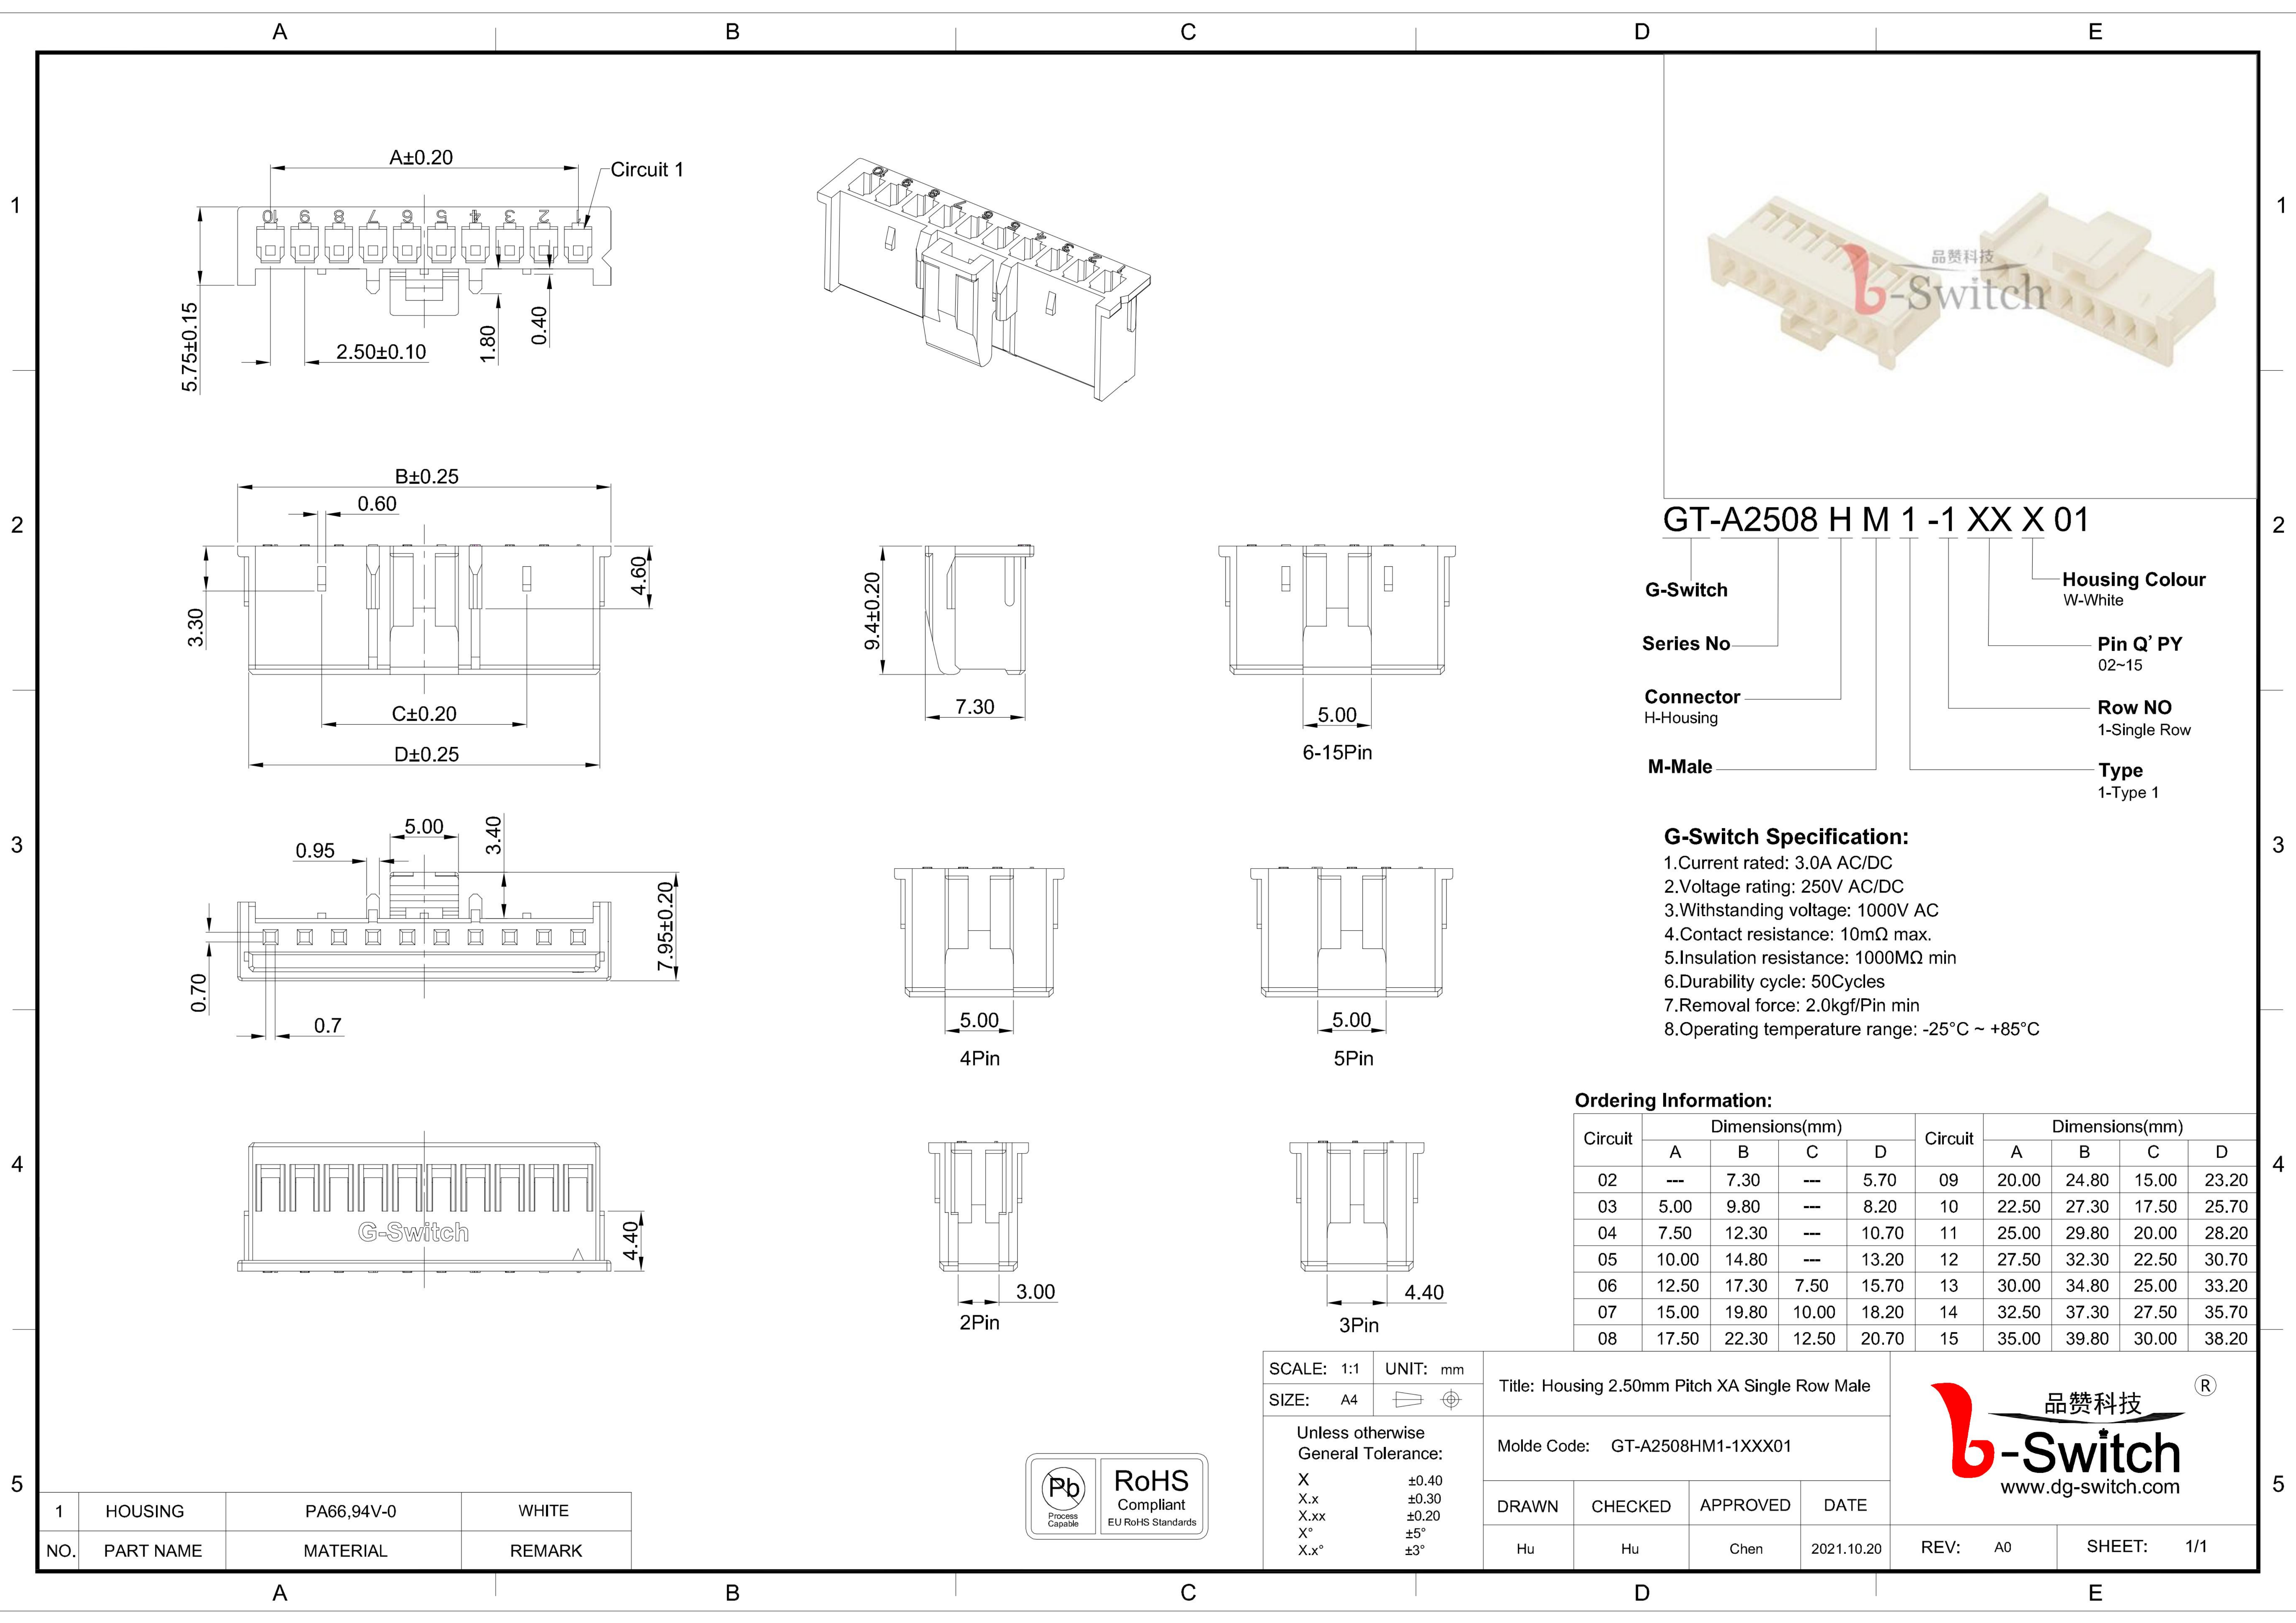

GT-A2508 H M 1 -1 XX X 01

G-Switch
Series No
Connector
M-Male
Housing Colour
W-White
Pin Q' PY
02~15
Row NO
1-Single Row
Type
1-Type 1

G-Switch Specification:

- 1.Current rated: 3.0A AC/DC
- 2.Voltage rating: 250V AC/DC
- 3.Withstanding voltage: 1000V AC
- 4.Contact resistance: 10mΩ max.
- 5.Insulation resistance: 1000MΩ min
- 6.Durability cycle: 50Cycles
- 7.Removal force: 2.0kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

Ordering Information:

Circuit	Dimensions(mm)				Circuit	Dimensions(mm)			
	A	B	C	D		A	B	C	D
02	---	7.30	---	5.70	09	20.00	24.80	15.00	23.20
03	5.00	9.80	---	8.20	10	22.50	27.30	17.50	25.70
04	7.50	12.30	---	10.70	11	25.00	29.80	20.00	28.20
05	10.00	14.80	---	13.20	12	27.50	32.30	22.50	30.70
06	12.50	17.30	7.50	15.70	13	30.00	34.80	25.00	33.20
07	15.00	19.80	10.00	18.20	14	32.50	37.30	27.50	35.70
08	17.50	22.30	12.50	20.70	15	35.00	39.80	30.00	38.20

SCALE: 1:1
UNIT: mm
SIZE: A4

Unless otherwise
General Tolerance:
X ±0.40
X.x ±0.30
X.xx ±0.20
X° ±5°
X.x° ±3°

Title: Housing 2.50mm Pitch XA Single Row Male
Molde Code: GT-A2508HM1-1XXX01
DRAWN: Hu
CHECKED: Hu
APPROVED: Chen
DATE: 2021.10.20



REV: A0
SHEET: 1/1

1	HOUSING	PA66,94V-0	WHITE
NO.	PART NAME	MATERIAL	REMARK

