
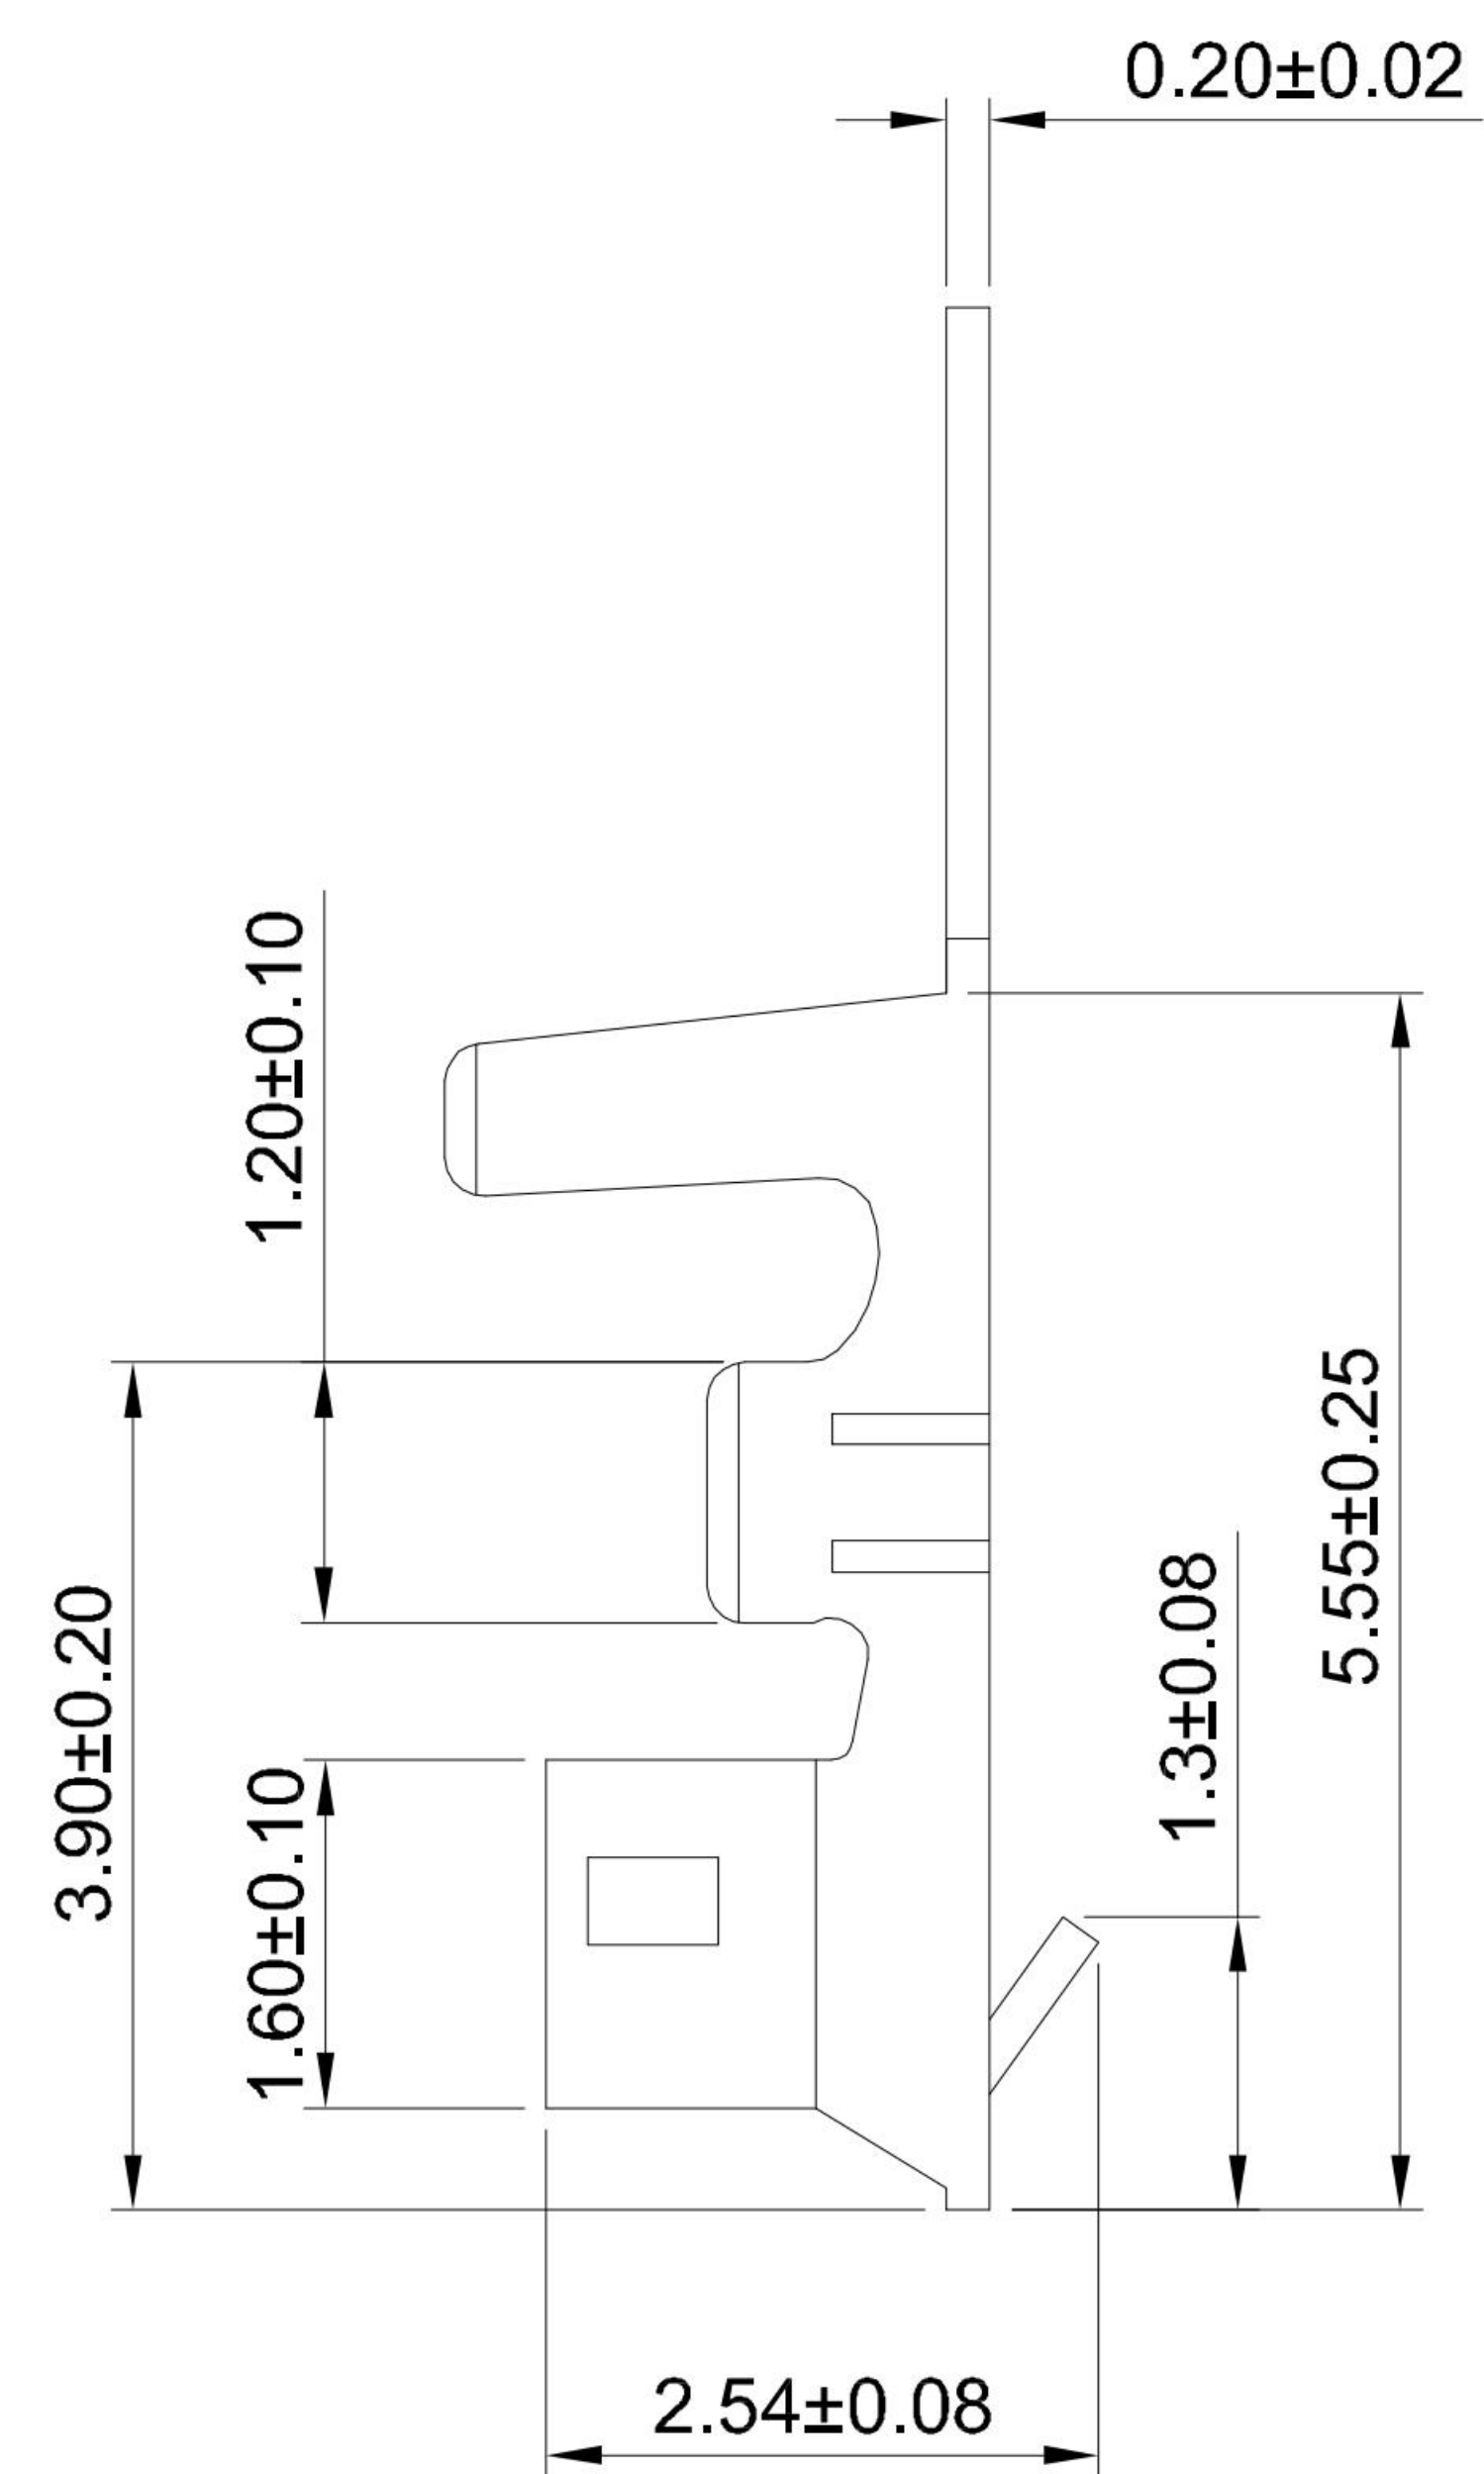



1
2
3
4
5

1
2
3
4
5

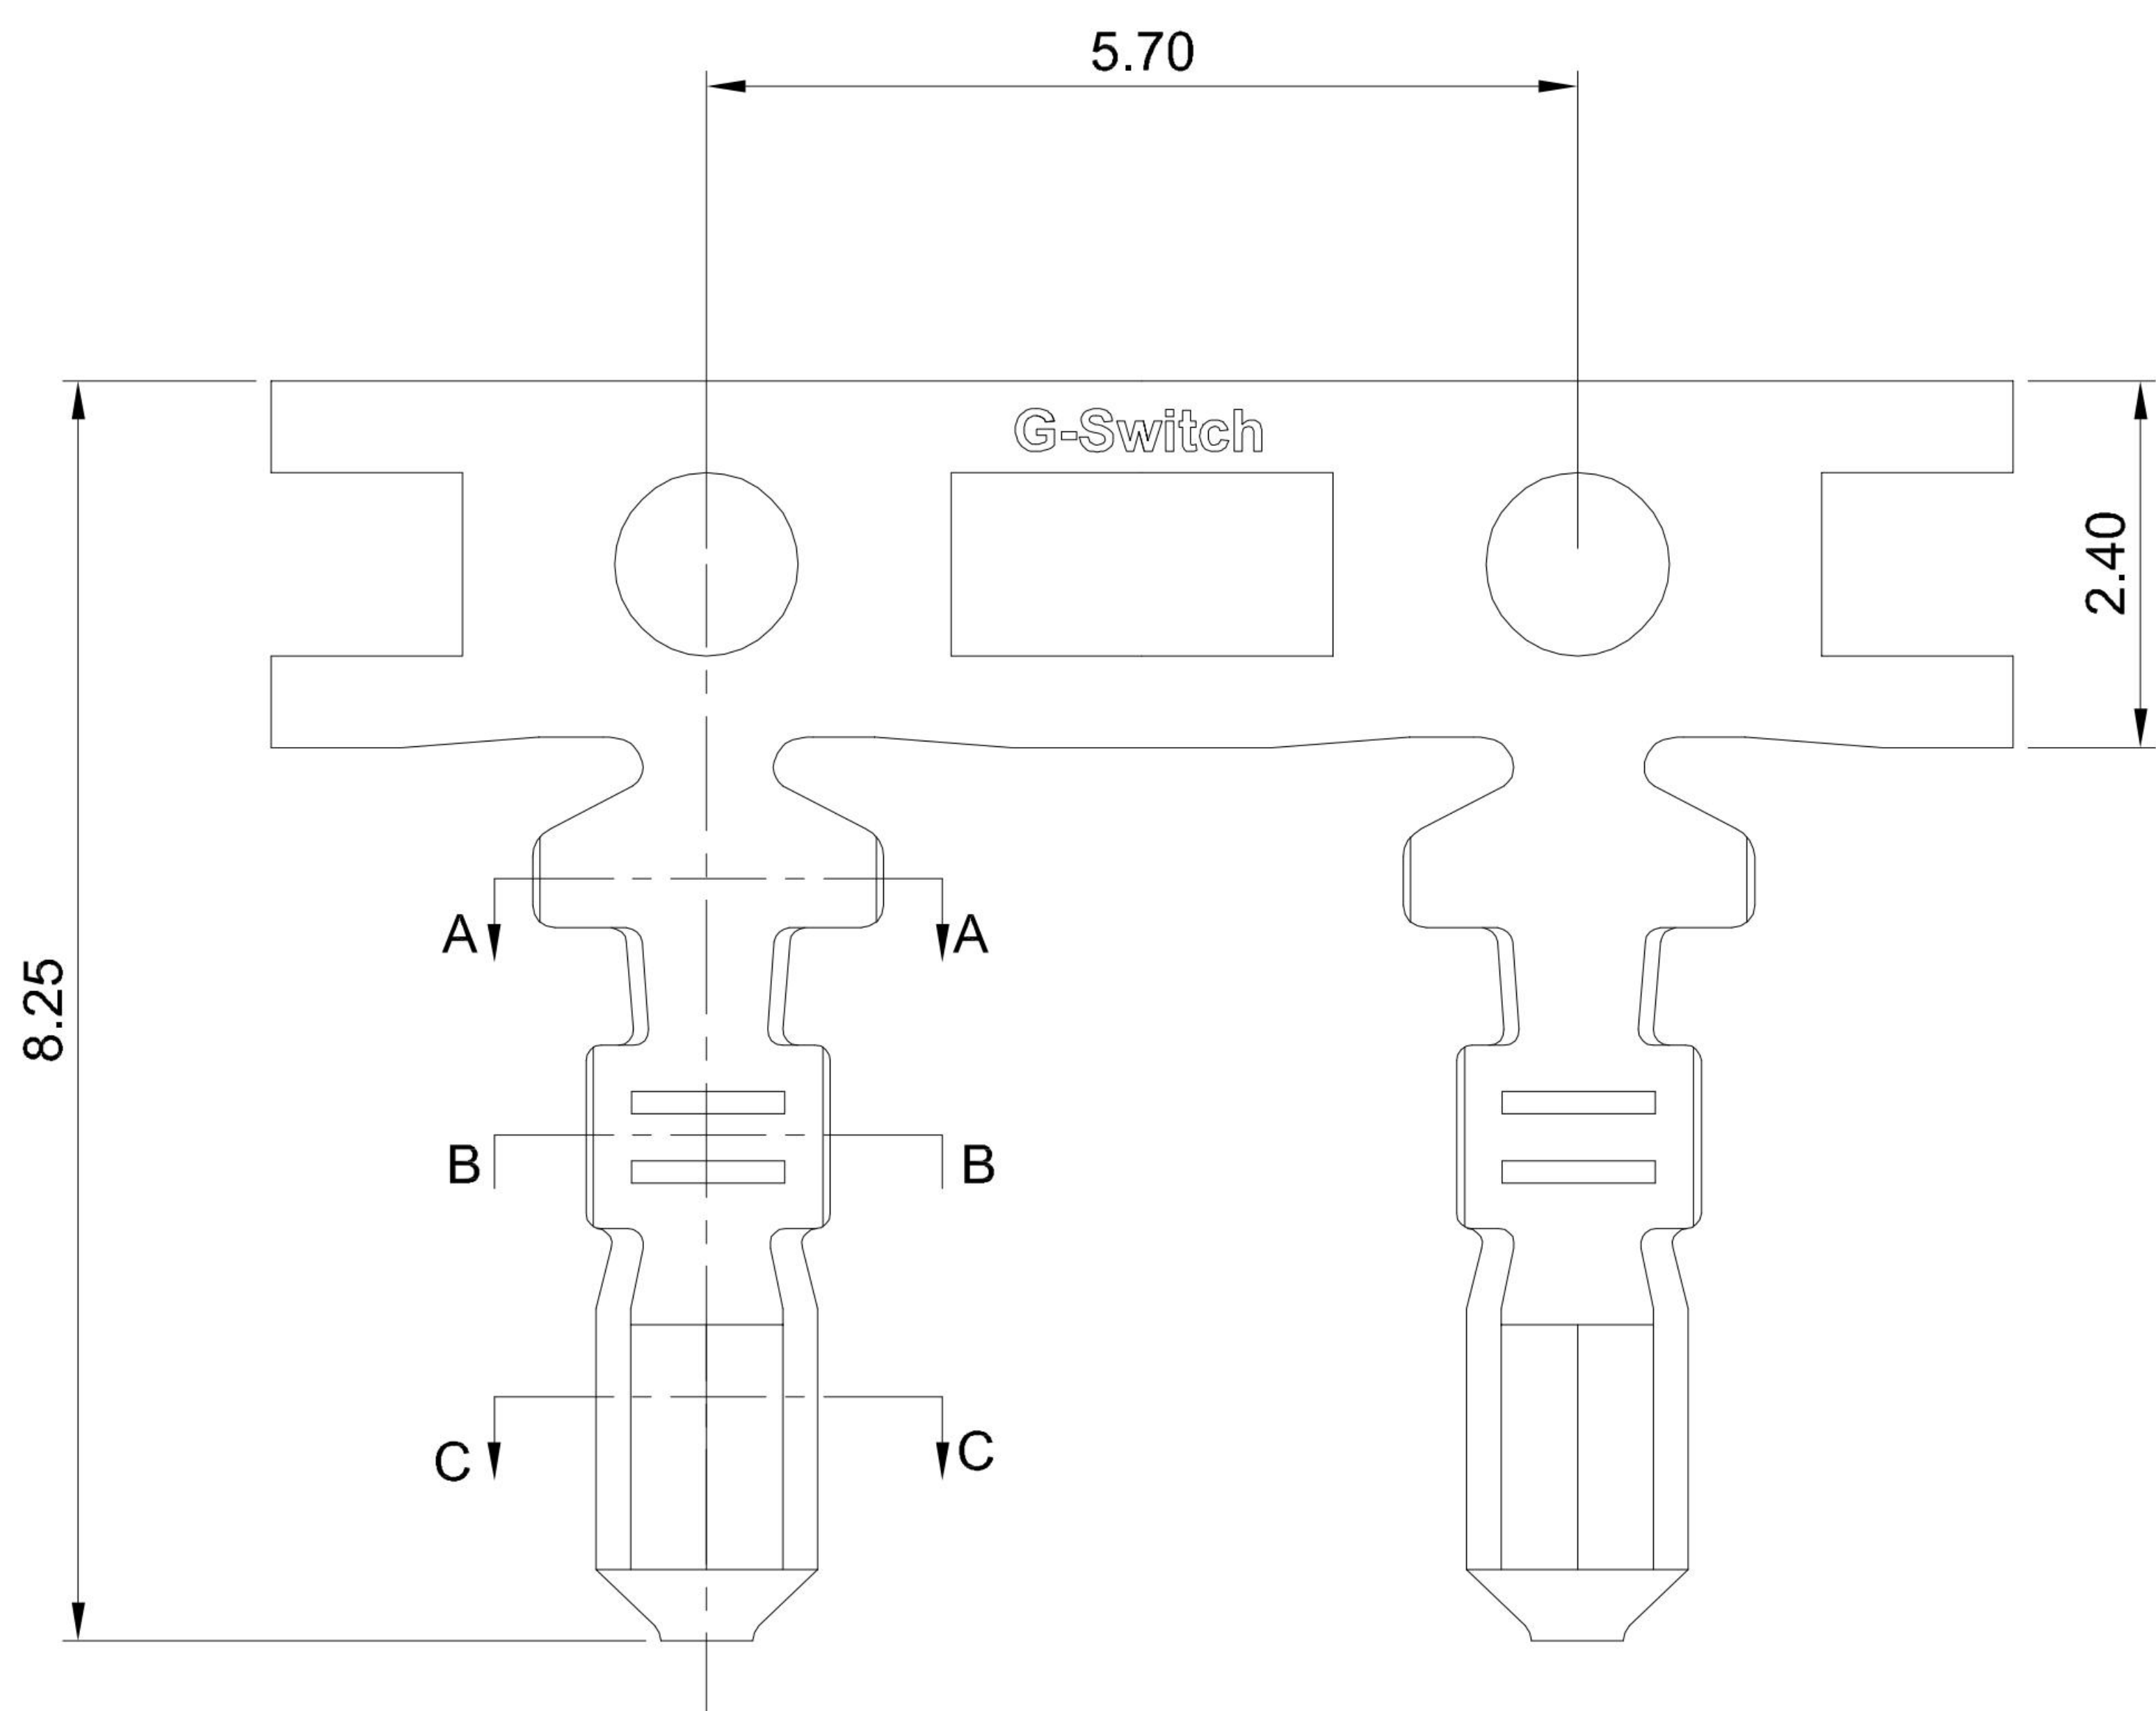


GT-A2001 T F -X XX 1


G-Switch
Series No
Connector T-Terminal
Terminal Plating BT-Bright Tin
Metal P-Phosphor bronze
F-Female

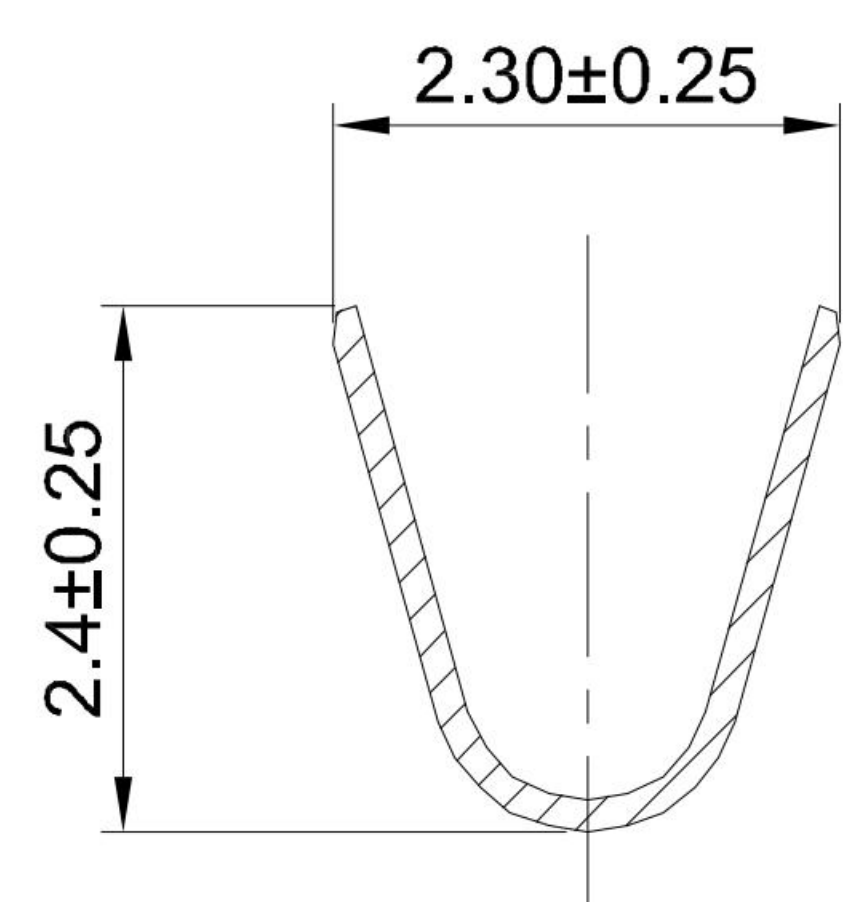

SECTION:A-A

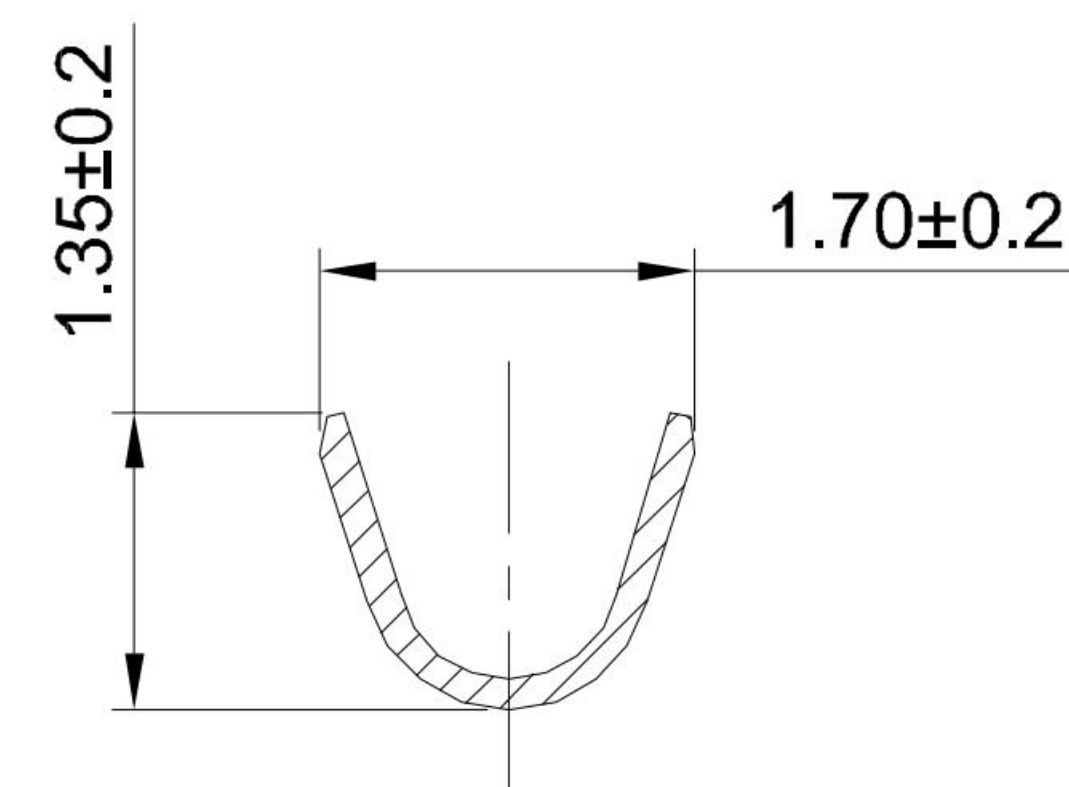

SECTION:B-B

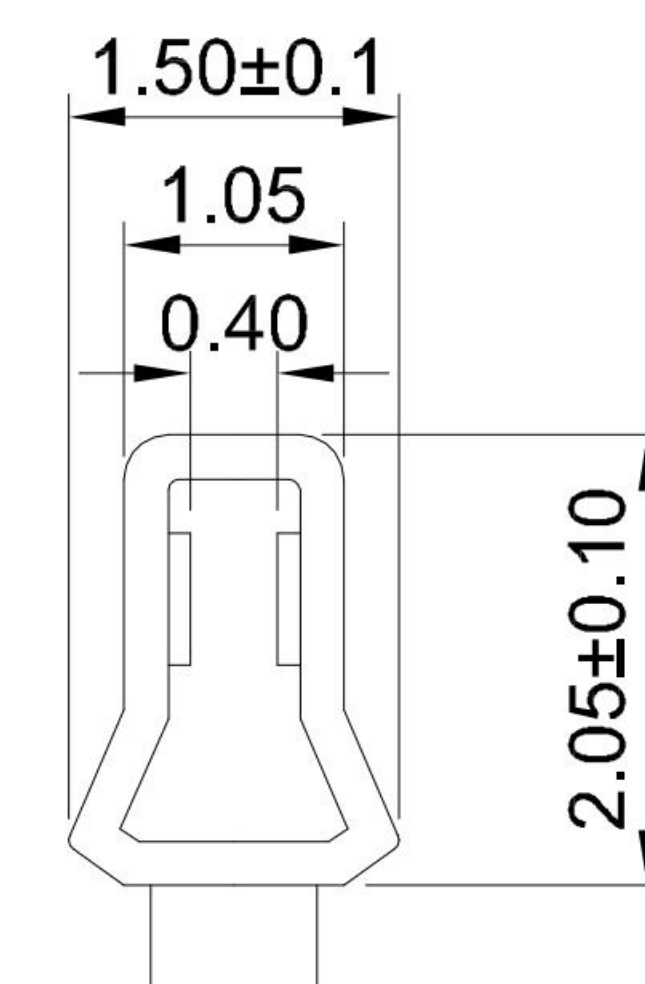


SECTION:C-C

G-Switch Specification:

- 1.Current rated: 2.0A AC/DC
- 2.Voltage rating: 100V AC/DC
- 3.Withstanding voltage: 800V AC
- 4.Contact resistance: 10mΩ max.
- 5.Insulation resistance: 1000MΩ min
- 6.Durability cycle: 30Cycles
- 7.Removal force: 1.20kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

GT-A2001TF-PBT1	Phosphor bronze	Bright Tin	AWG#22~28	1.50mm(Max)	12000
Part NO	Material	Plating	Wire Size	Insulation O.D	Reel/PCS



SCALE: 1:1	UNIT: mm	Title: Terminal 2.00mm Pitch PH Crimp Style				 品赞科技® www.dg-switch.com			
SIZE: A4		Molde Code: GT-A2001TF-XXX1							
Unless otherwise General Tolerance: X ±0.40 X.x ±0.30 X.xx ±0.20 X° ±5° X.x° ±3°		DRAWN	CHECKED	APPROVED	DATE				
		Hu	Hu	Chen	2021.10.18	REV: A0	SHEET: 1/1		

A B C D E