


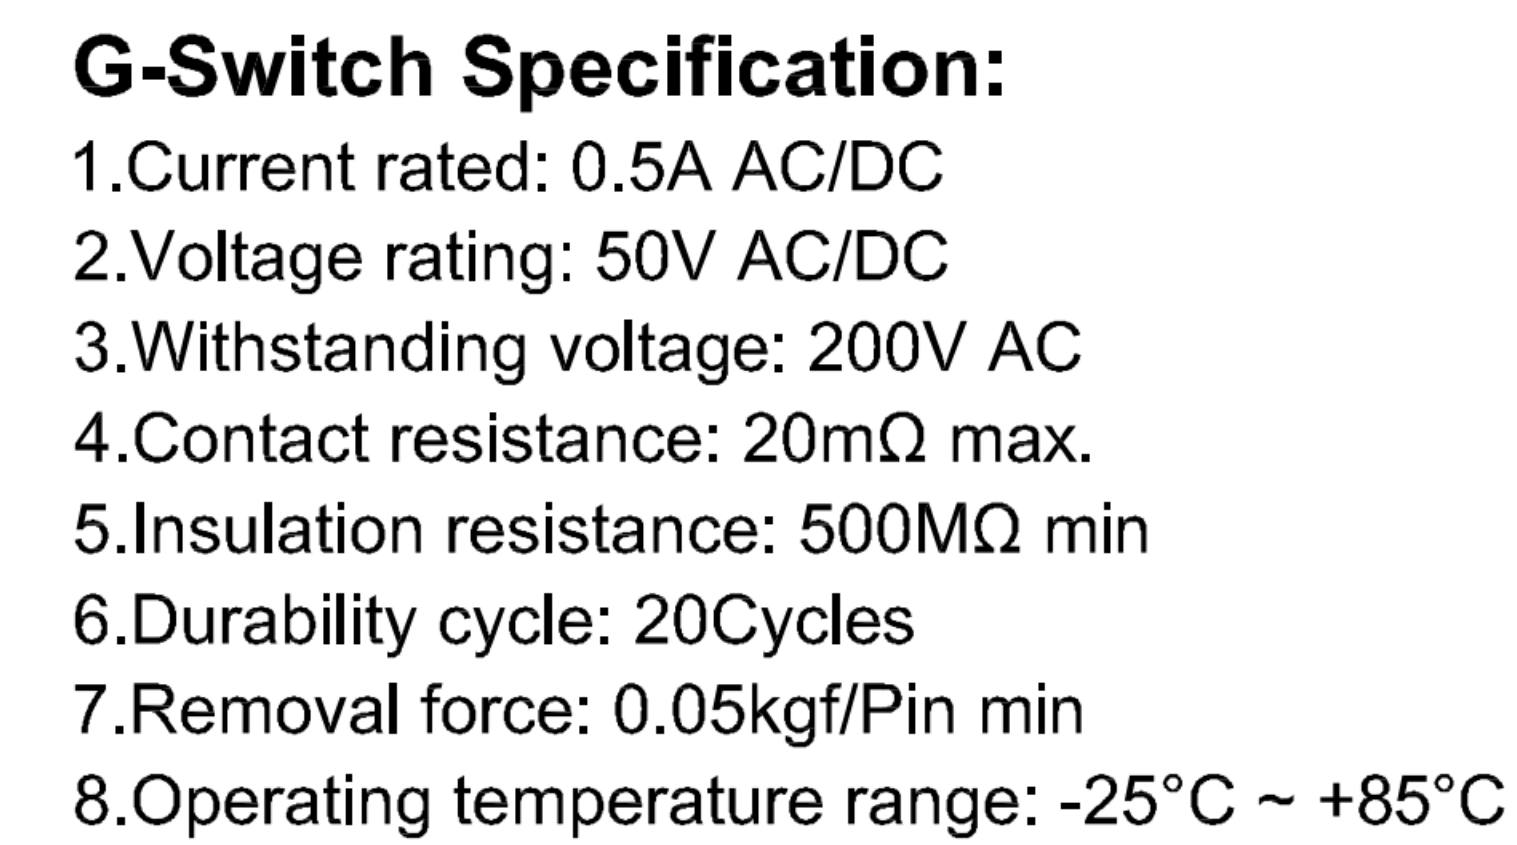

GT-F1001 D R 25 -XX X XX 01

G-Switch

Series No-

Termipoint:
D-DIP

Angle
R-90°



Terminal Plating

BT-Bright Tin



Housing Colour
S-Nature

- **Pin Q' PY**
06~30


— **Height**
25-2.50mm

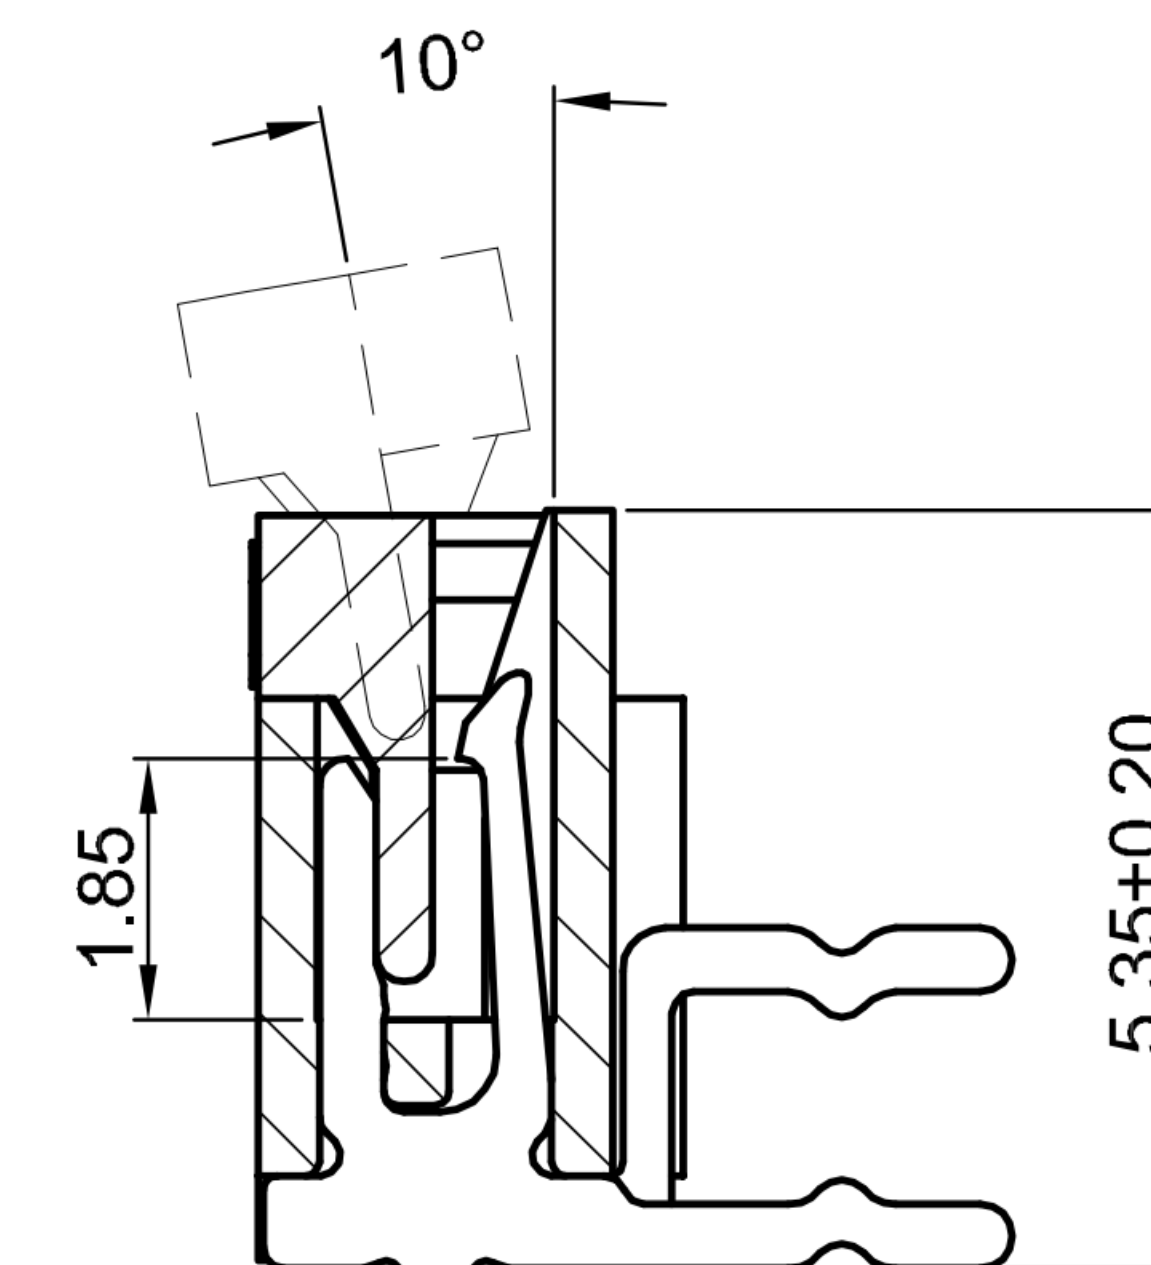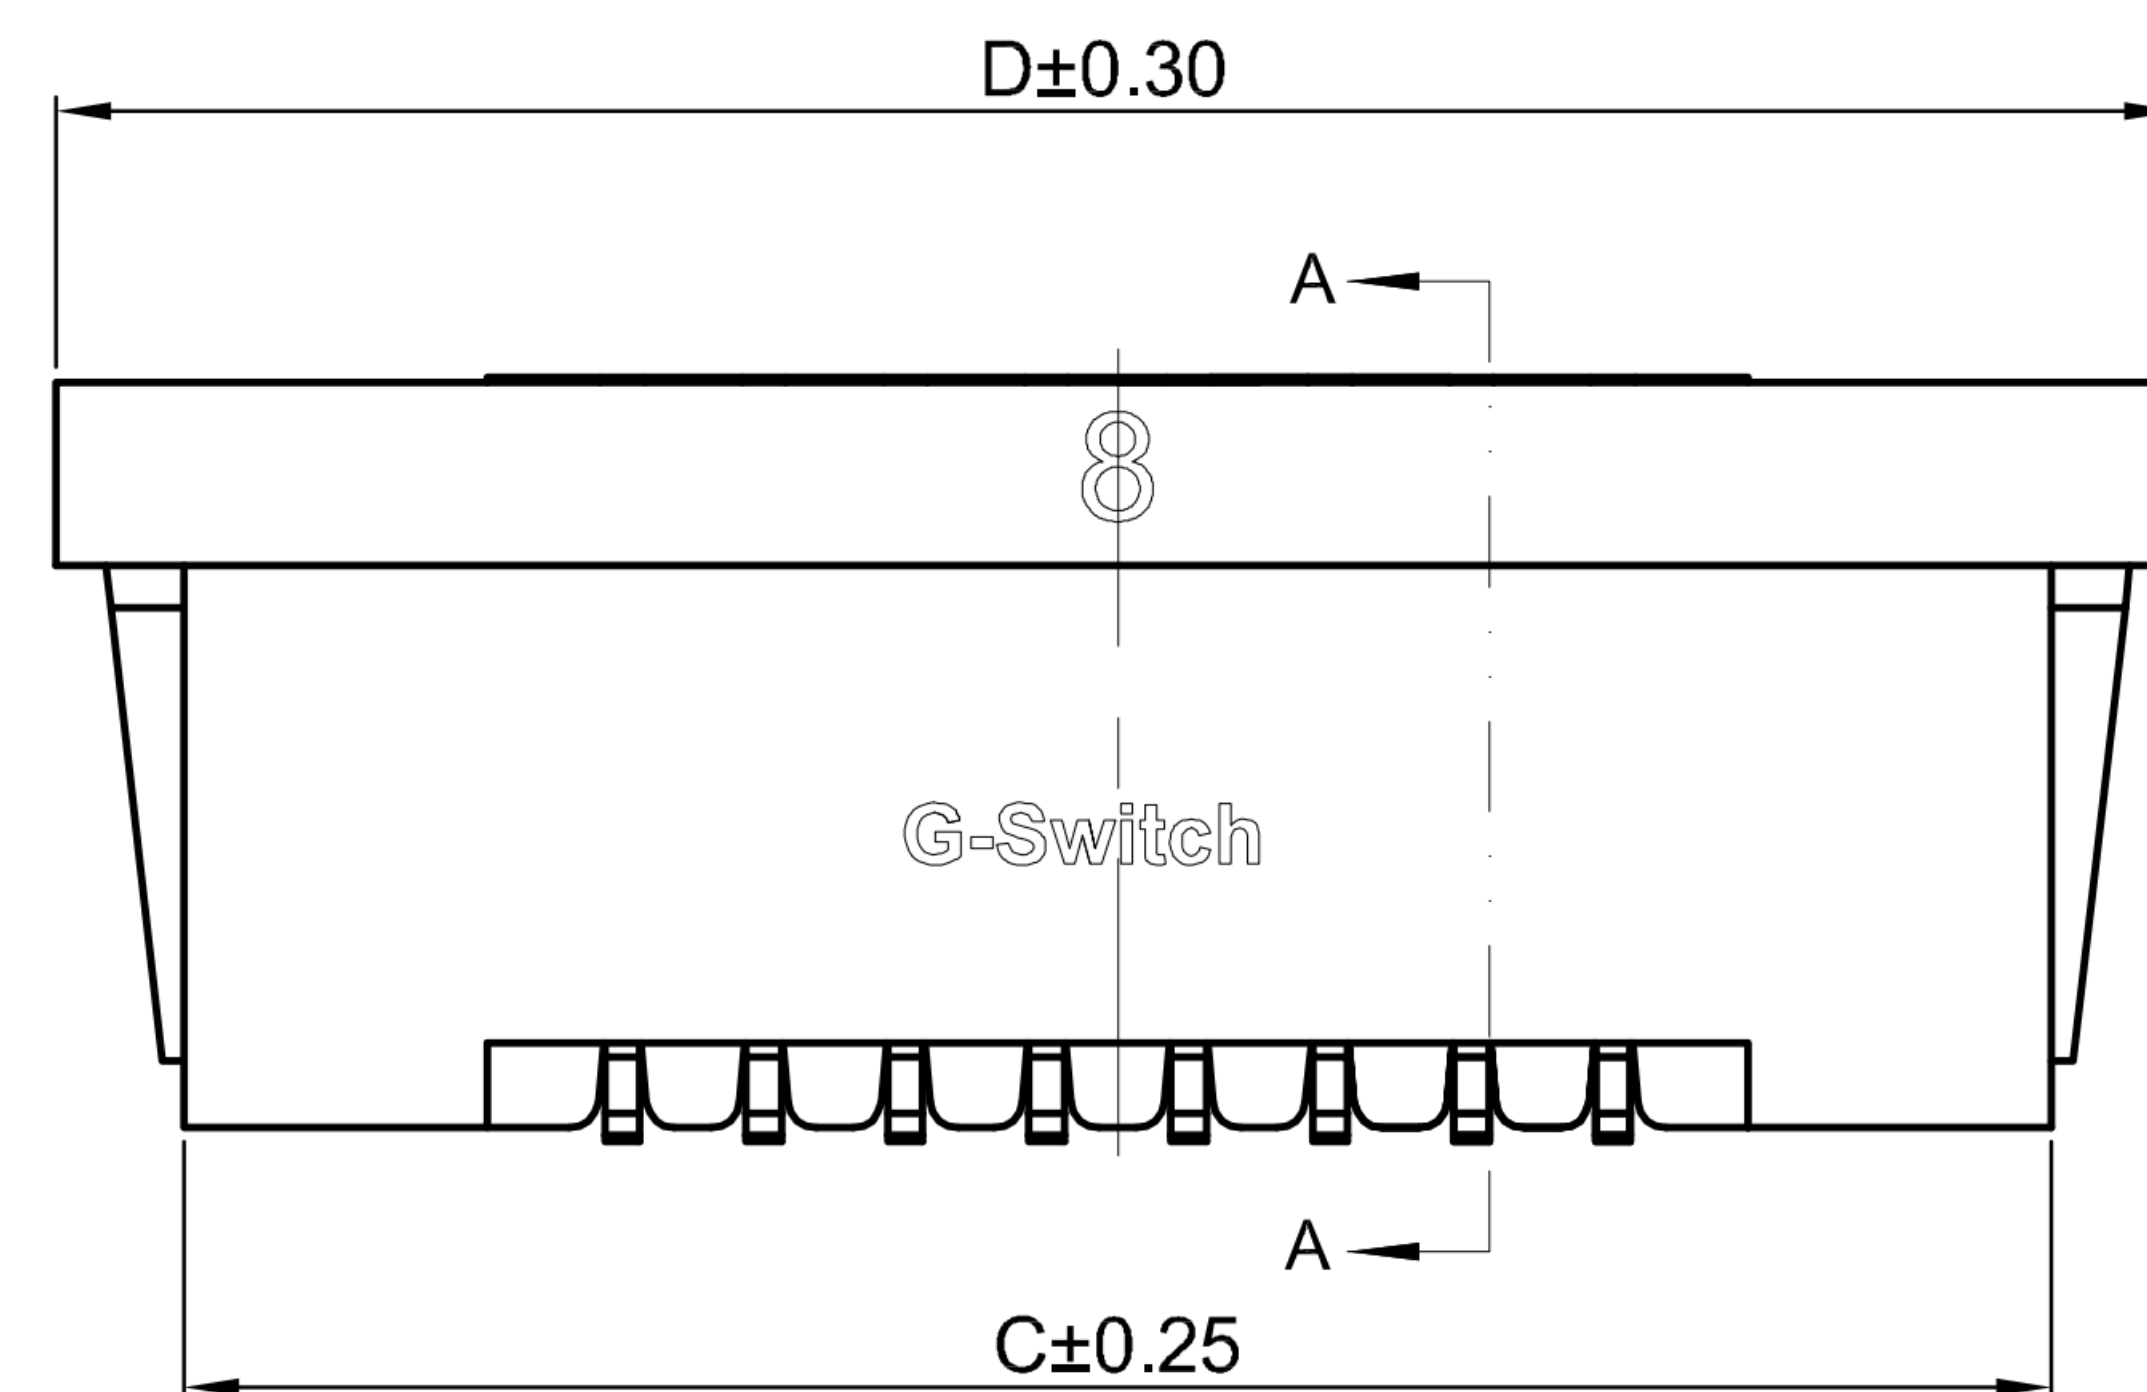

SECTION A-A

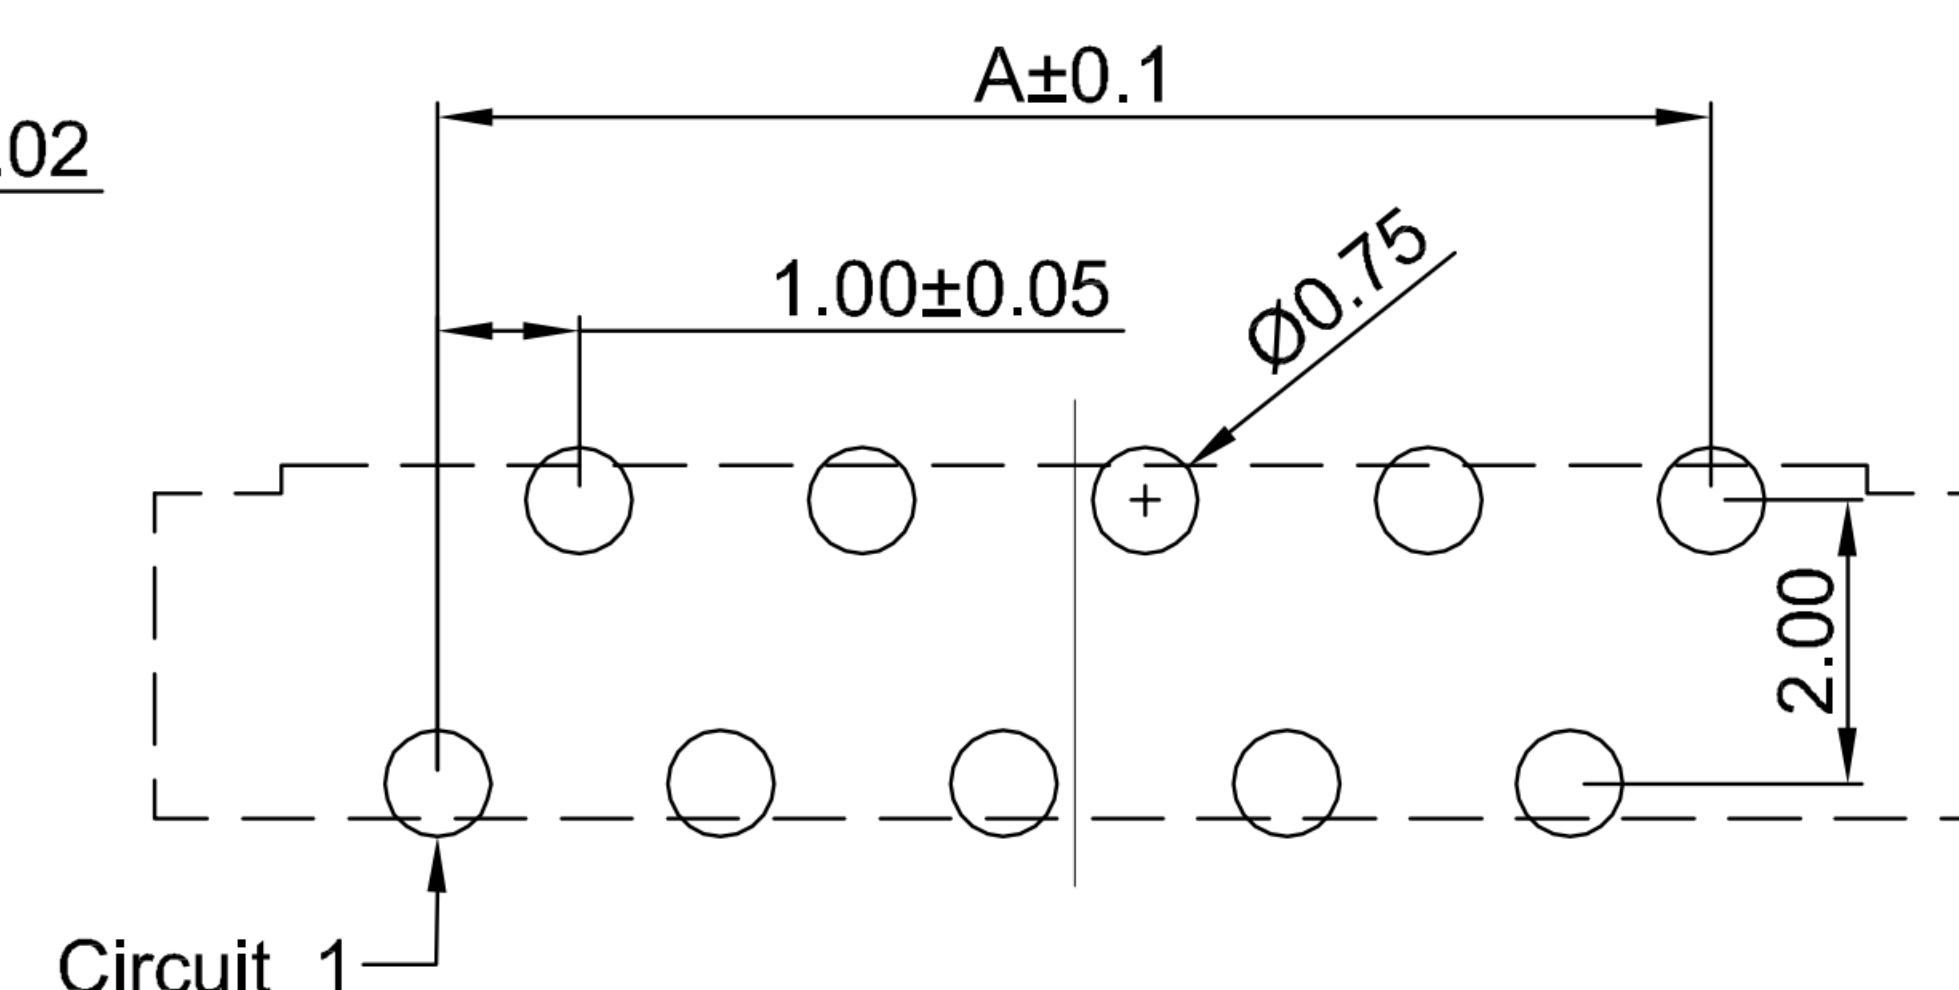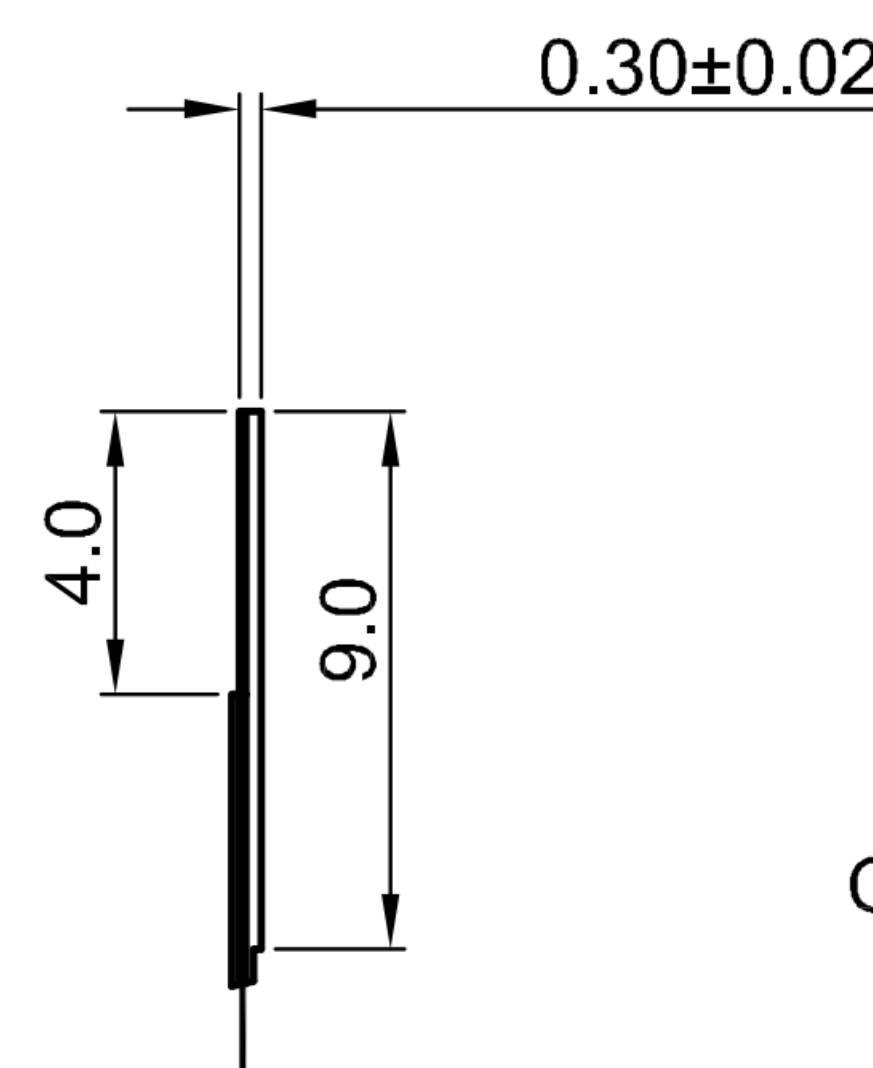

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05

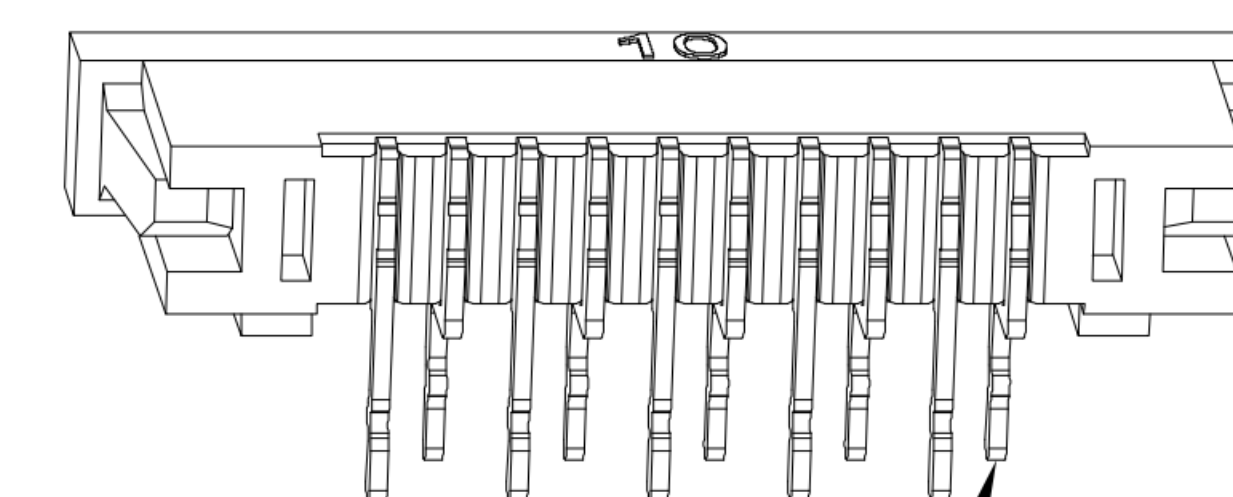


Circuit 1

Ordering Information:

Circuit	Dimensions(mm)			D
	A	B	C	
06	5.00	7.15	11.20	13.10
08	7.00	9.15	13.20	15.10
09	8.00	10.15	14.20	16.10
14	13.00	15.15	19.20	21.10
15	14.00	16.15	20.20	22.10
16	15.00	17.15	21.20	23.10
17	16.00	18.15	22.20	24.10
18	17.00	19.15	23.20	25.10
20	19.00	21.15	25.20	27.10
22	21.00	23.15	27.20	29.10
24	23.00	25.15	29.20	31.10
25	24.00	26.15	30.20	32.10
26	25.00	27.15	31.20	33.10
27	26.00	28.15	32.20	34.10
28	27.00	29.15	33.20	35.10
30	29.00	31.15	35.20	37.10

3	CONTACT	PHOSPHOR BRONZE	BRIGHT Tin
2	COVER	LCP,94V-0	BLACK
1	HOUSING	LCP,94V-0	NATURE
NO.	PART NAME	MATERIAL	REMARK



SCALE: 1:1	UNIT: mm
SIZE: A4	

Unless otherwise
General Tolerance:

X	±0.40
X.x	±0.30
X.xx	±0.20
X°	±5°
X.x°	±3°

Title: FPC 1.00mm Pitch 90° Right DIP Double Row
Single Sided Welding Bottom Contacts

Molde Code: GT-F1001DR25-XXXXX01

DRAWN	CHECKED	APPROVED	DATE
Jiang	Hu	Chen	2021.06.28



REV: A0

SHEET: 1/1