




A

B


C

D



E

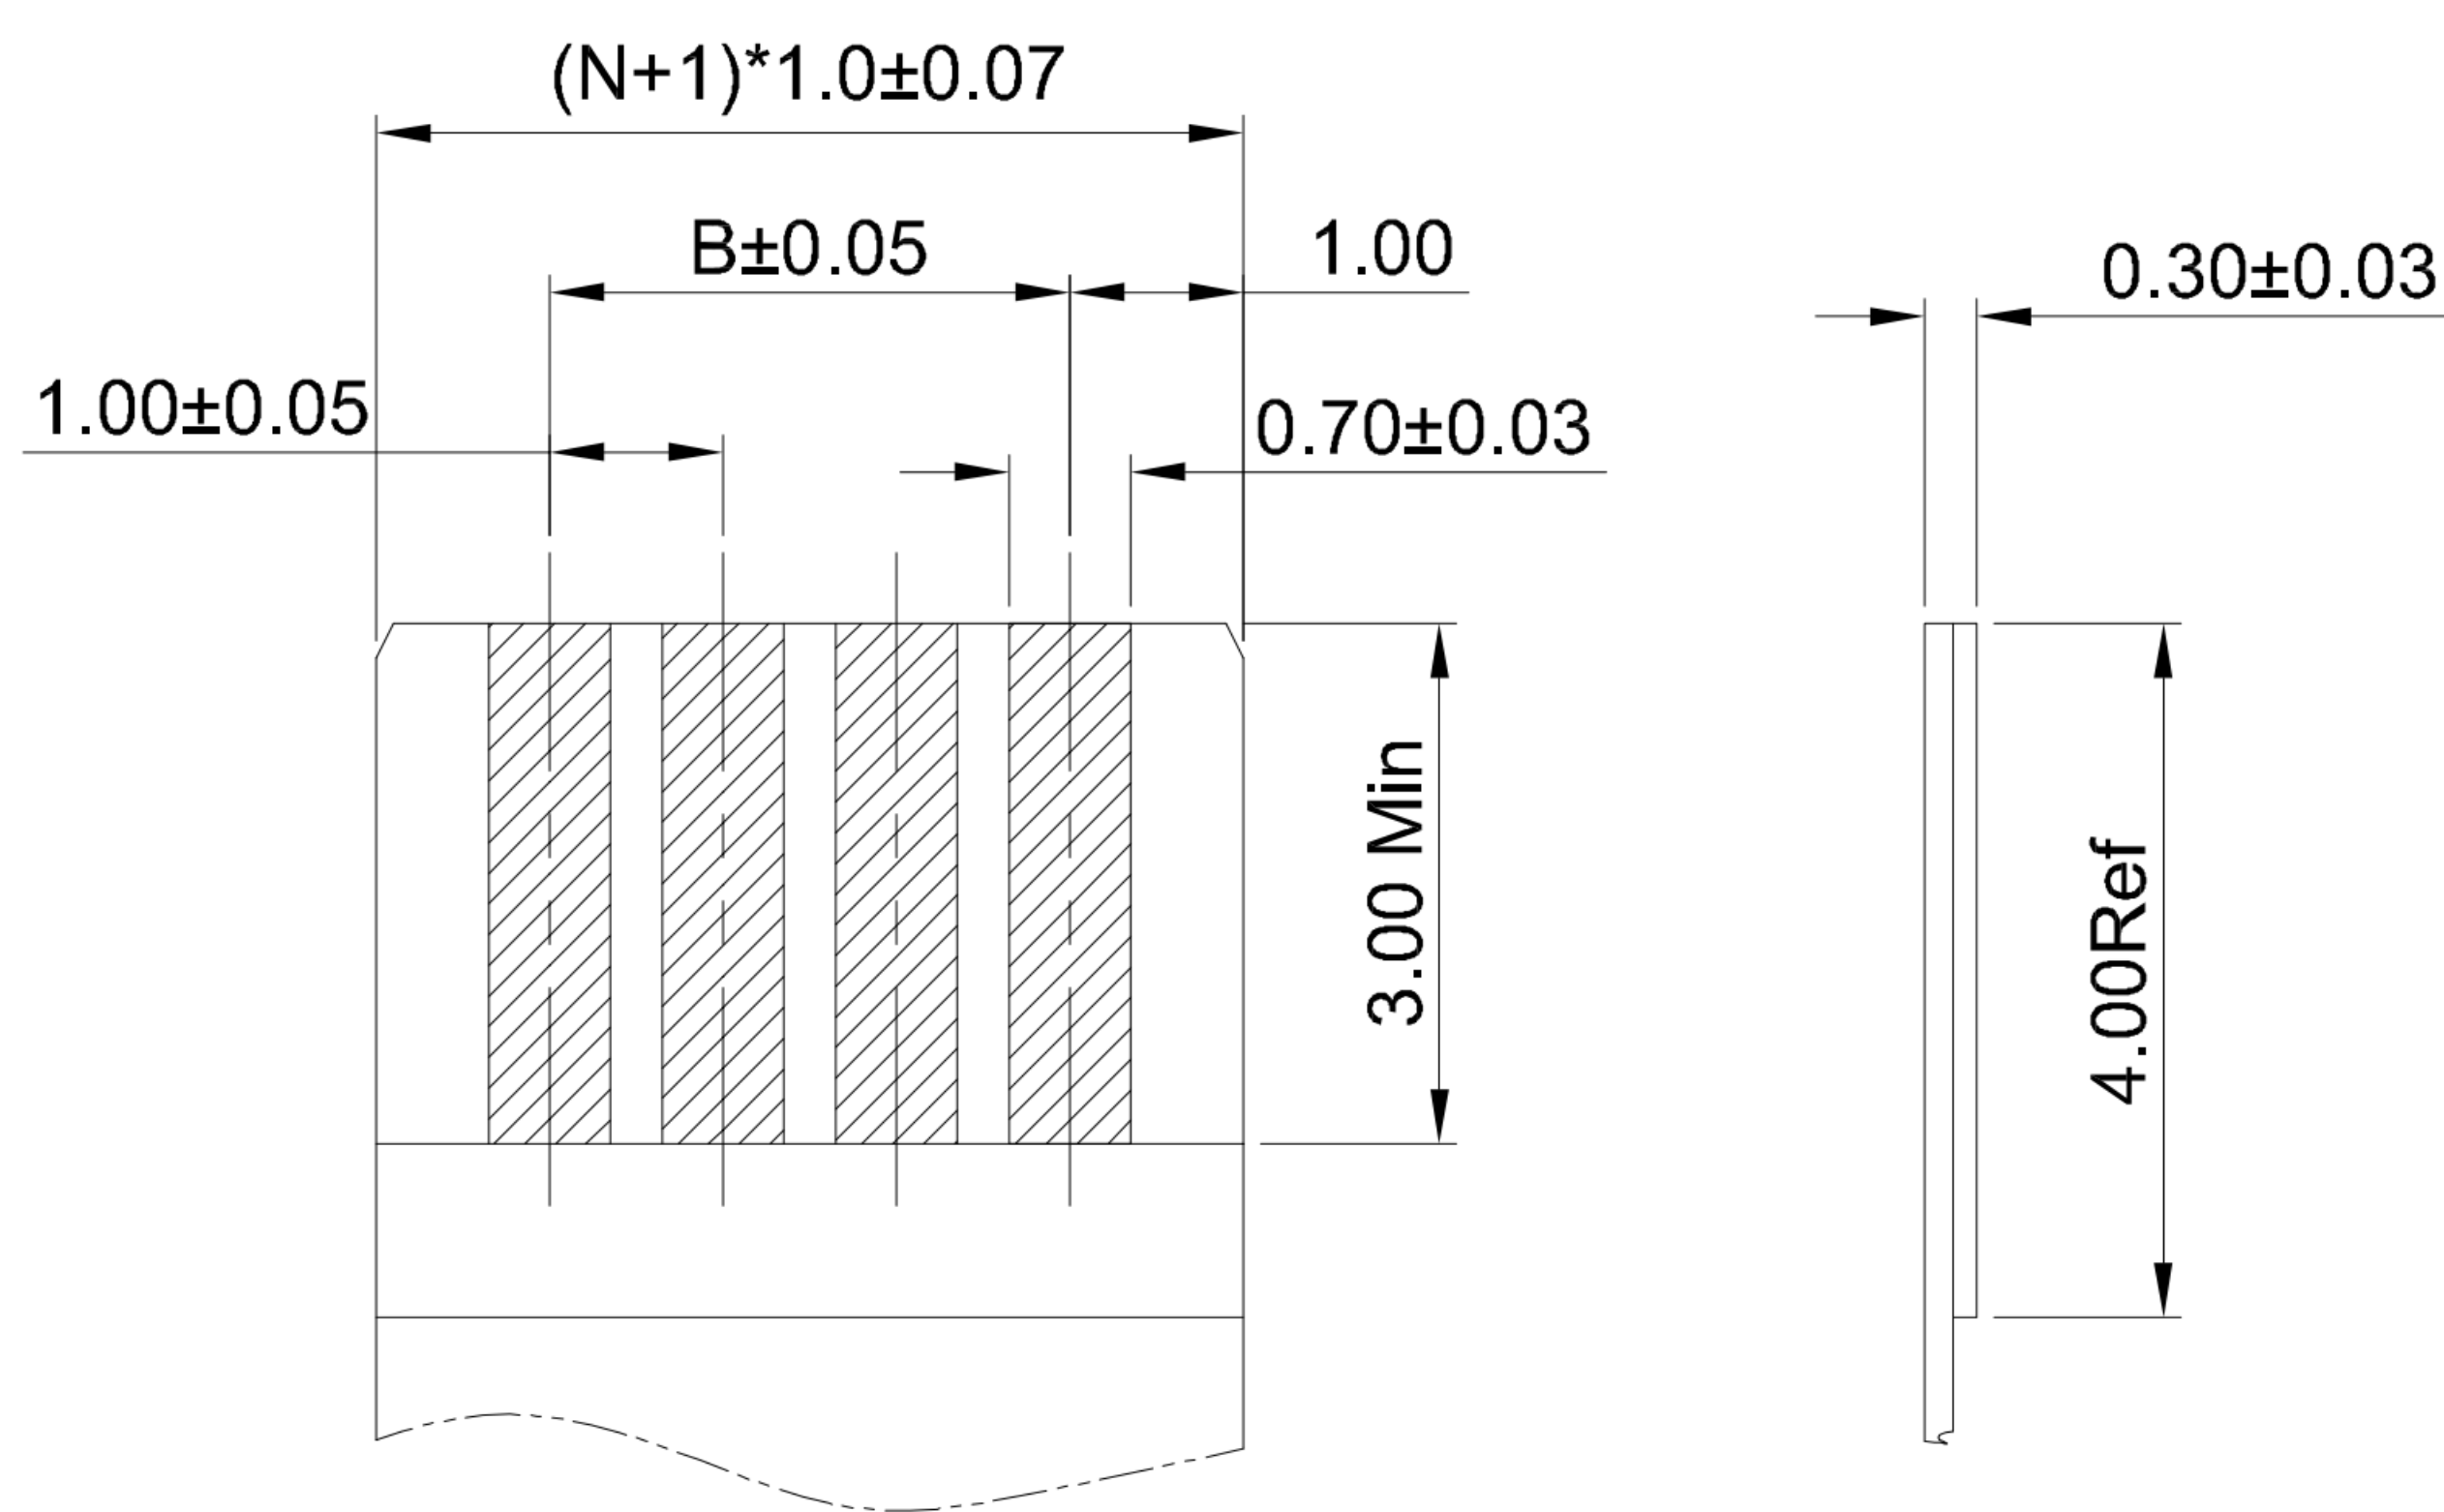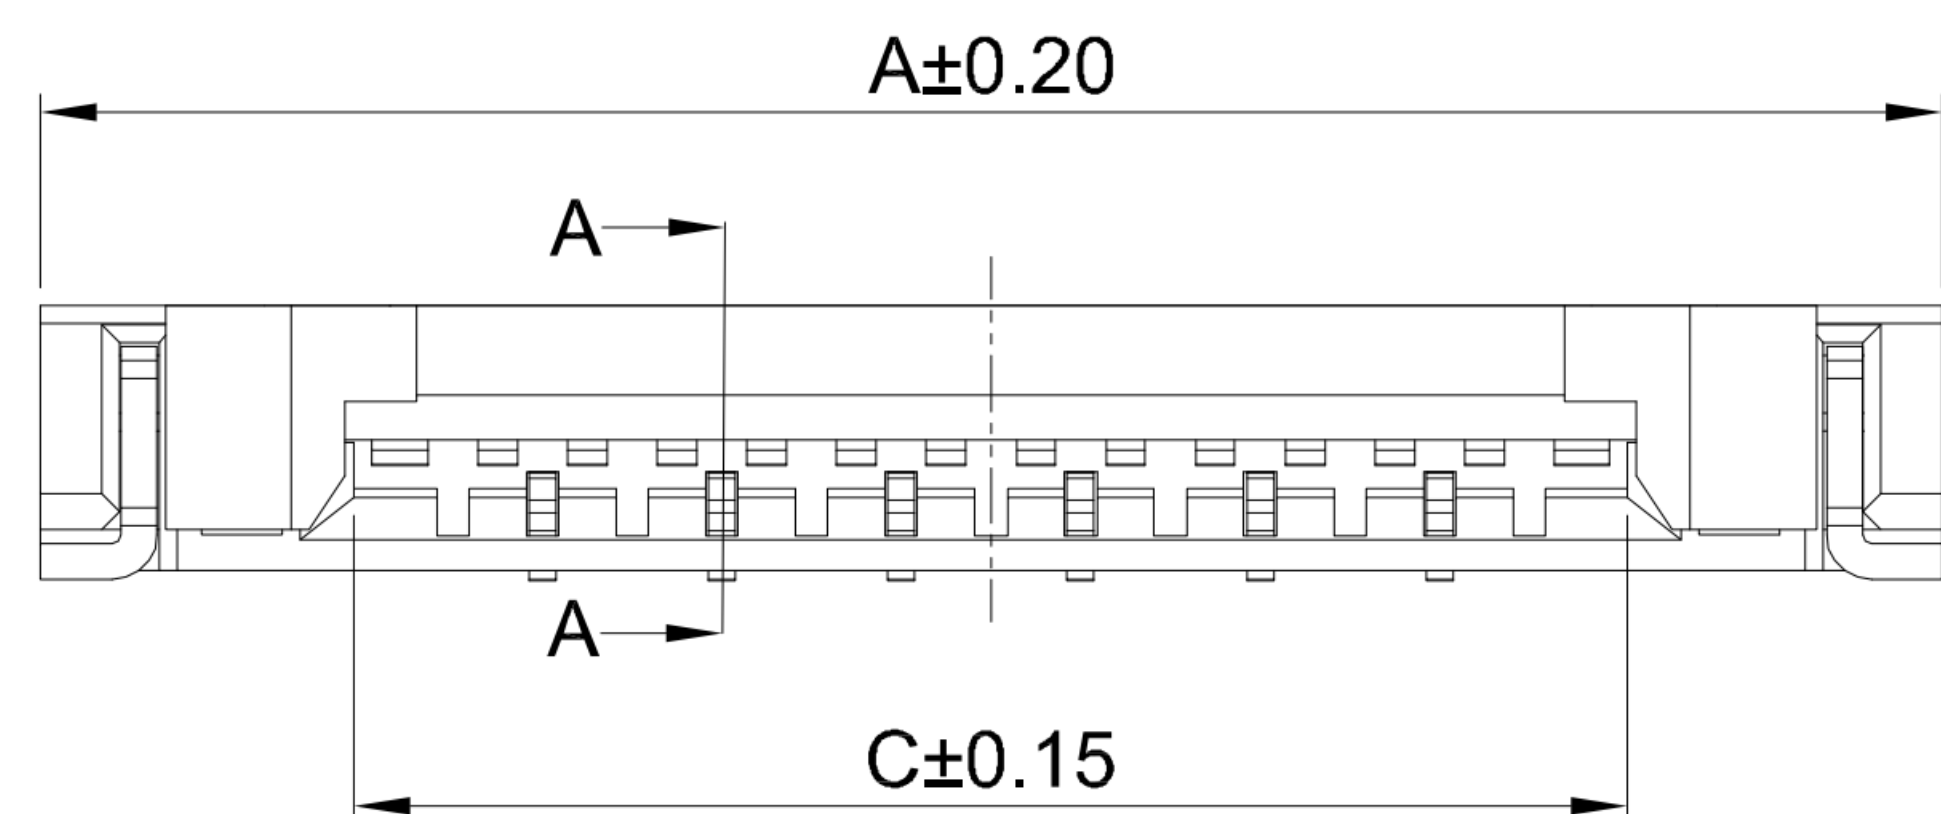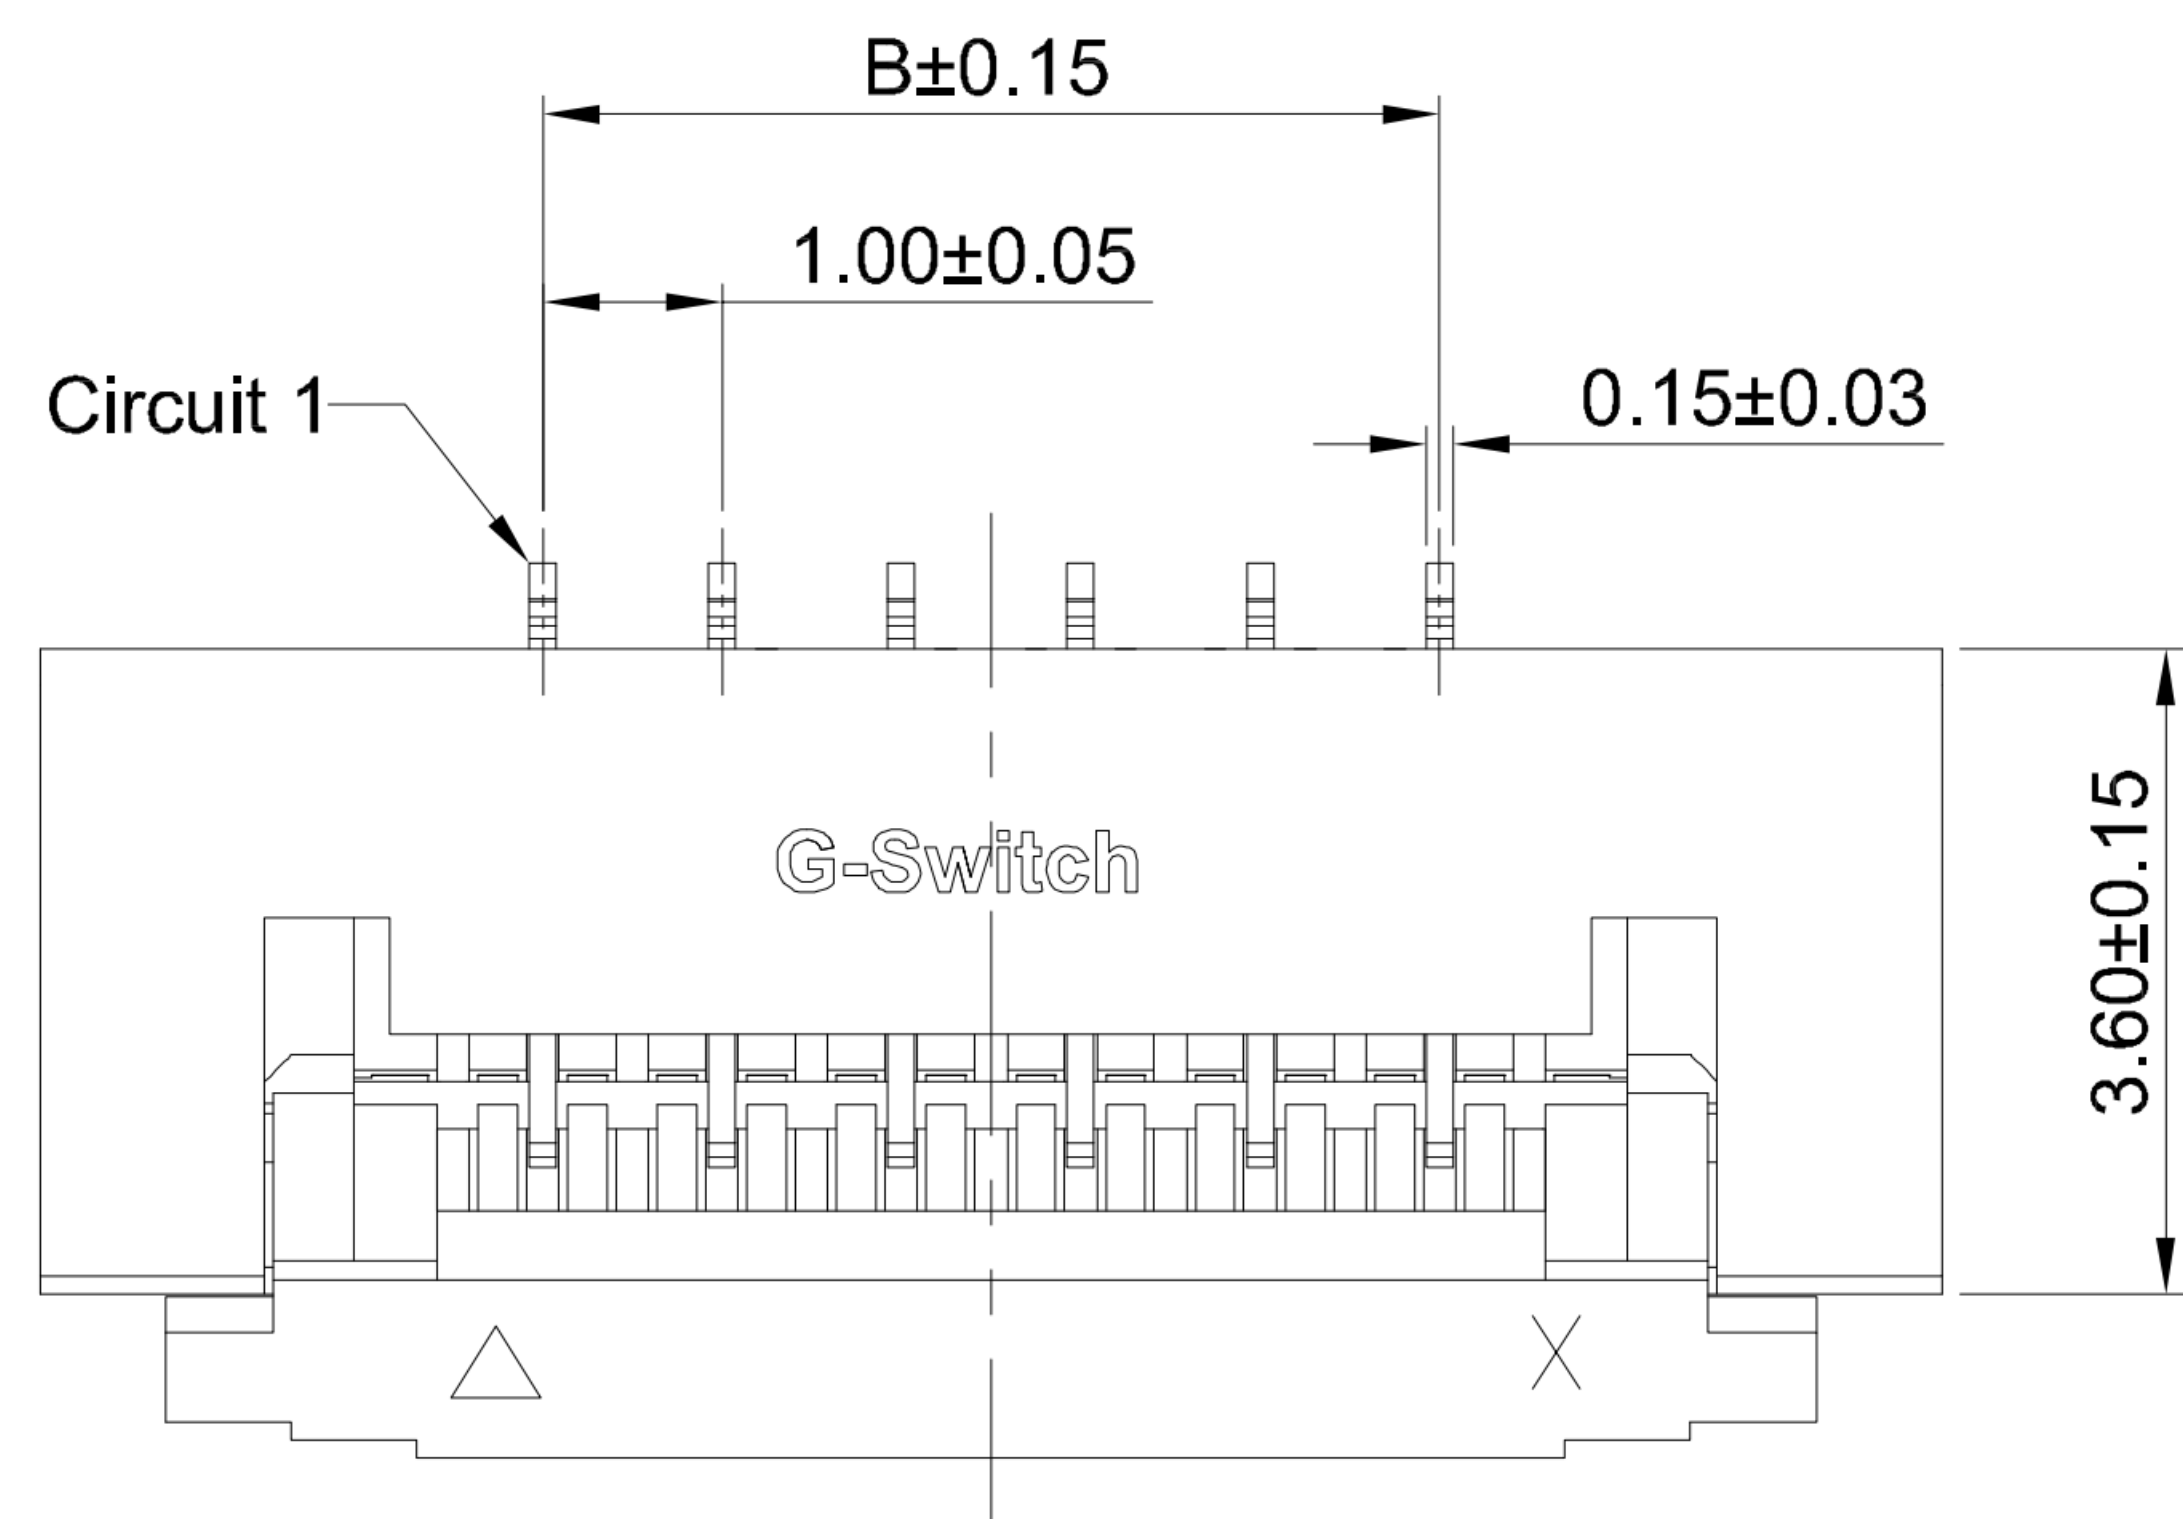

APPLICABLE FPC

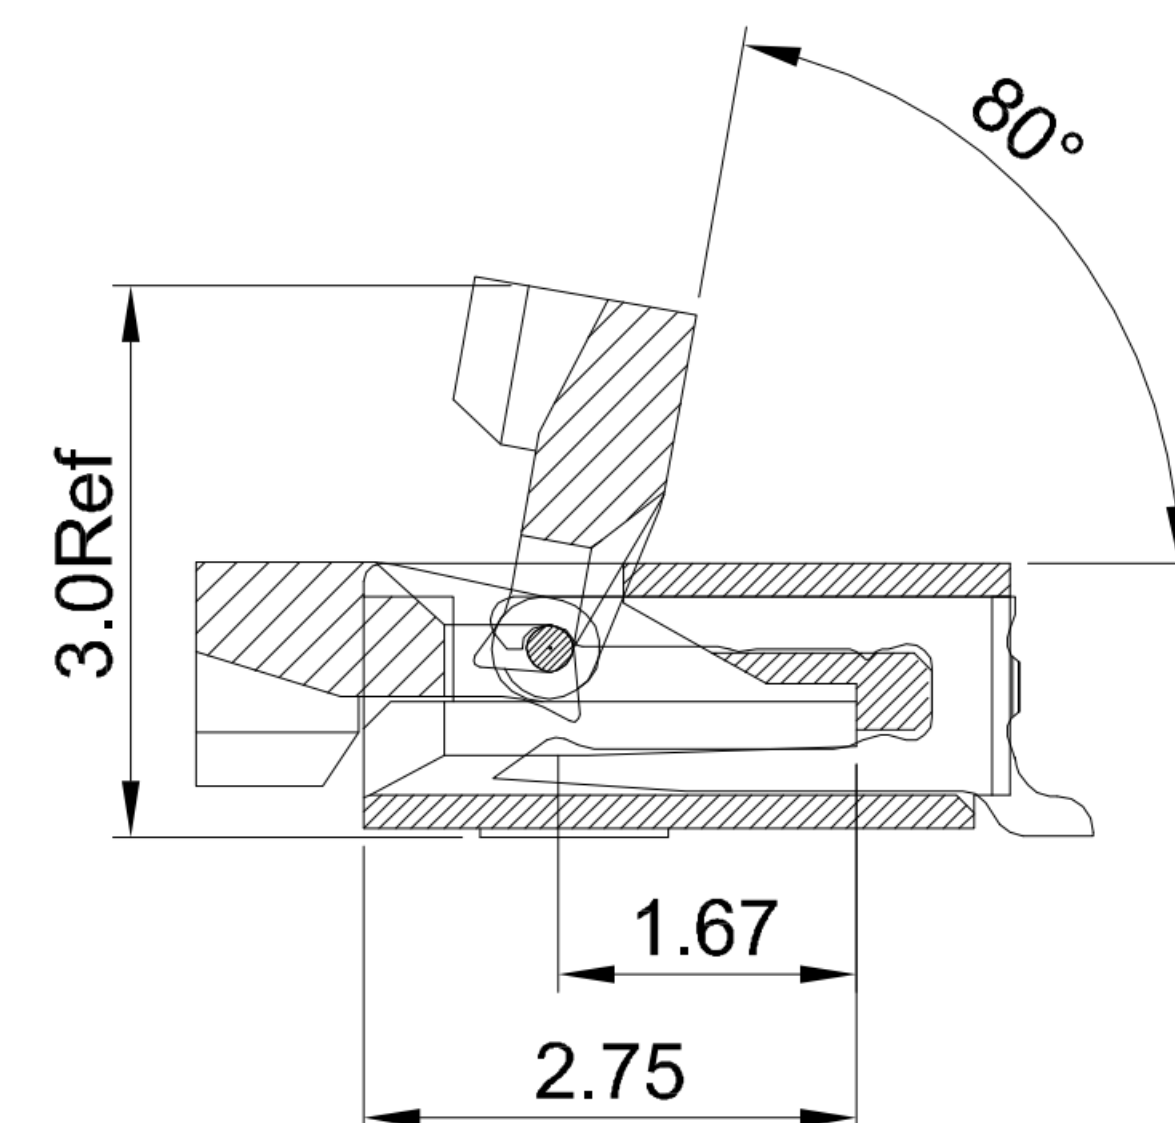

SECION:A-A

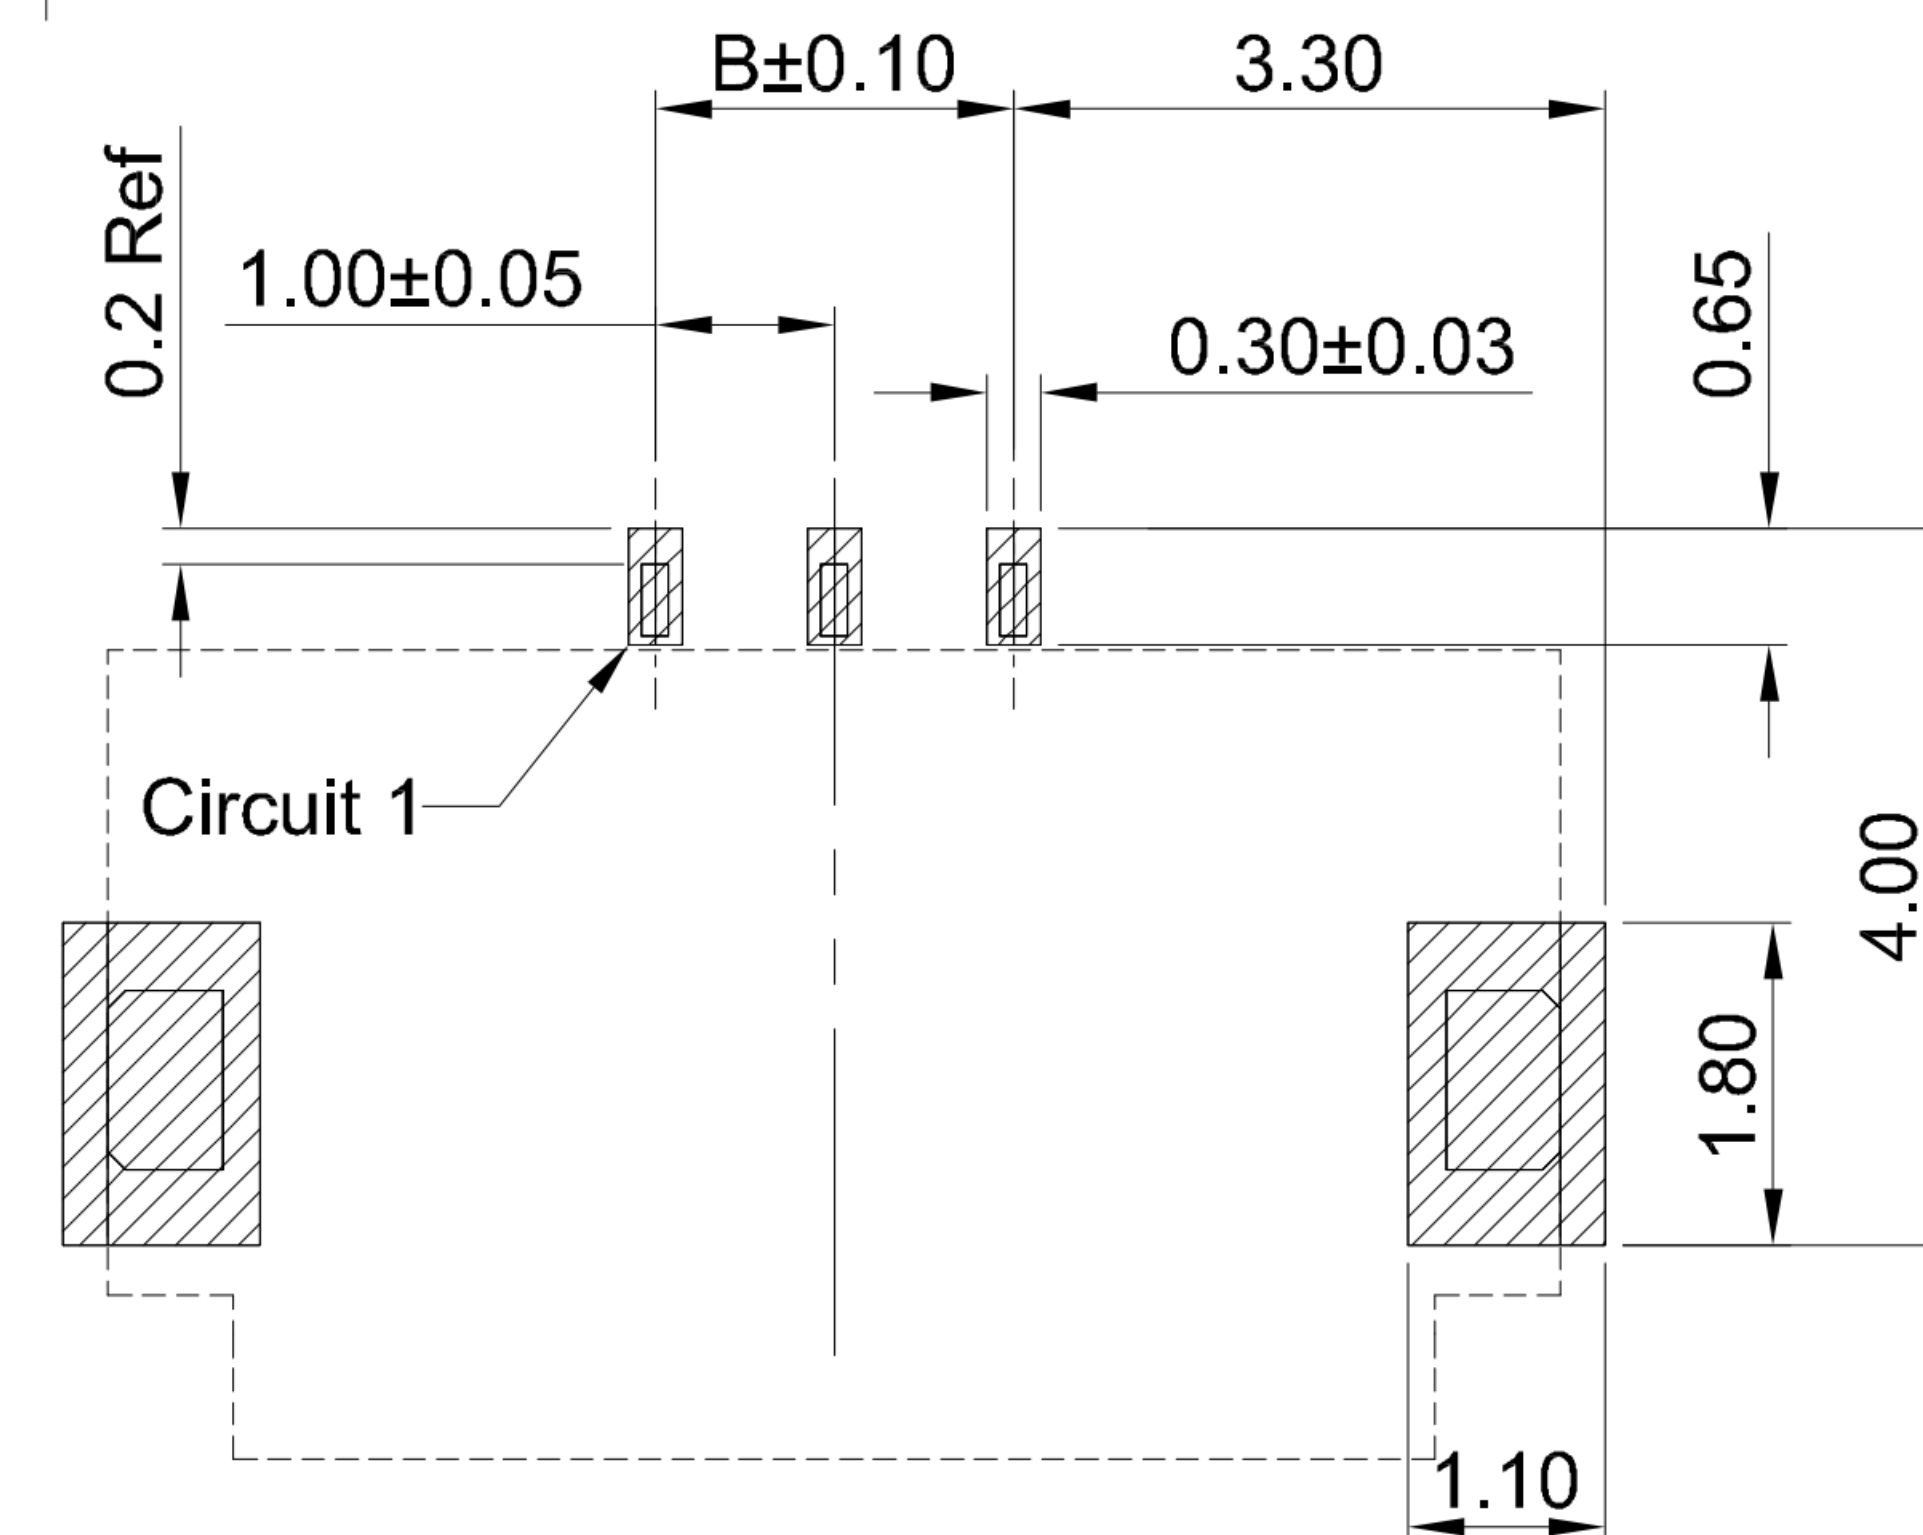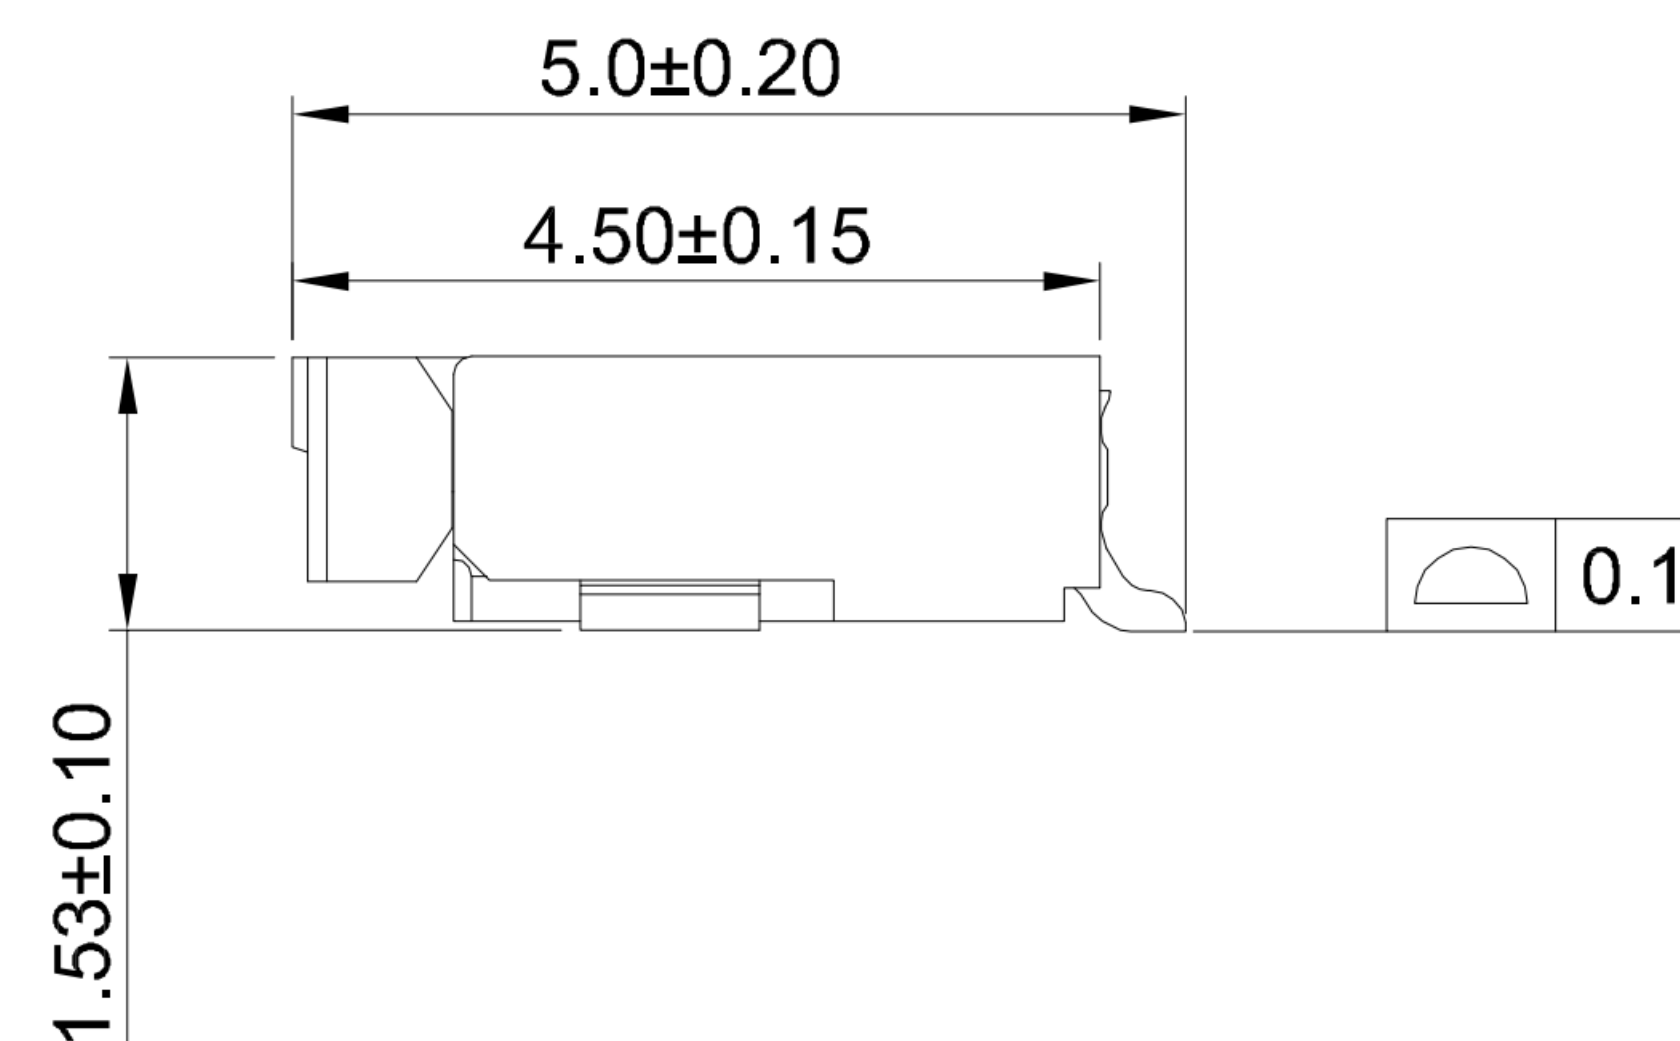

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05

G-Switch Specification:

- 1.Current rated: 0.5A AC/DC
- 2.Voltage rating: 50V AC/DC
- 3.Withstanding voltage: 250V AC
- 4.Contact resistance: 40mΩ max.
- 5.Insulation resistance: 500MΩ min
- 6.Durability cycle: 20Cycles
- 7.Removal force: 0.03kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C



GT-F1013 S R 15 -XX X XX 01

G-Switch

Series No

Termipoint
S-SMT

Angle
R-90°

Terminal Plating

MT-Matte tin
01-G/F

Housing Colour

S-Nature

Pin Q' PY
04~30

Height
15-1.50mm

Ordering Information:

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
4	8.60	3.00	5.07	17	21.60	16.00	18.07
5	9.60	4.00	6.07	18	22.60	17.00	19.07
6	10.60	5.00	7.07	19	23.60	18.00	20.07
7	11.60	6.00	8.07	20	24.60	19.00	21.07
8	12.60	7.00	9.07	21	25.60	20.00	22.07
9	13.60	8.00	10.07	22	26.60	21.00	23.07
10	14.60	9.00	11.07	23	27.60	22.00	24.07
11	15.60	10.00	12.07	24	28.60	23.00	25.07
12	16.60	11.00	13.07	25	29.60	24.00	26.07
13	17.60	12.00	14.07	26	30.60	25.00	27.07
14	18.60	13.00	15.07	27	31.60	26.00	28.07
15	19.60	14.00	16.07	28	32.60	27.00	29.07
16	20.60	15.00	17.07	30	34.60	29.00	31.07

4	SOLDER TABS	BRASS	MATTE Tin
3	CONTACT	PHOSPHOR BRONZE	Gold-Flash On Contact Area Or Matte Tin
2	COVER	LCP,94V-0	BLACK
1	HOUSING	LCP,94V-0	NATURE
NO.	PART NAME	MATERIAL	REMARK



SCALE: 1:1	UNIT: mm	Title: FPC 1.00mm Pitch 90° SMT Type H1.50mm Connector			
SIZE: A4		Unless otherwise General Tolerance: X ±0.40 X.x ±0.30 X.xx ±0.20 X° ±5° X.x° ±3°			
		Title: GT-F1013SR15-XXXXX01			
		DRAWN	CHECKED	APPROVED	DATE
		Jiang	Hu	Chen	2021.06.28

品赞科技
www.dg-switch.com

REV: A0

SHEET: 1/1