

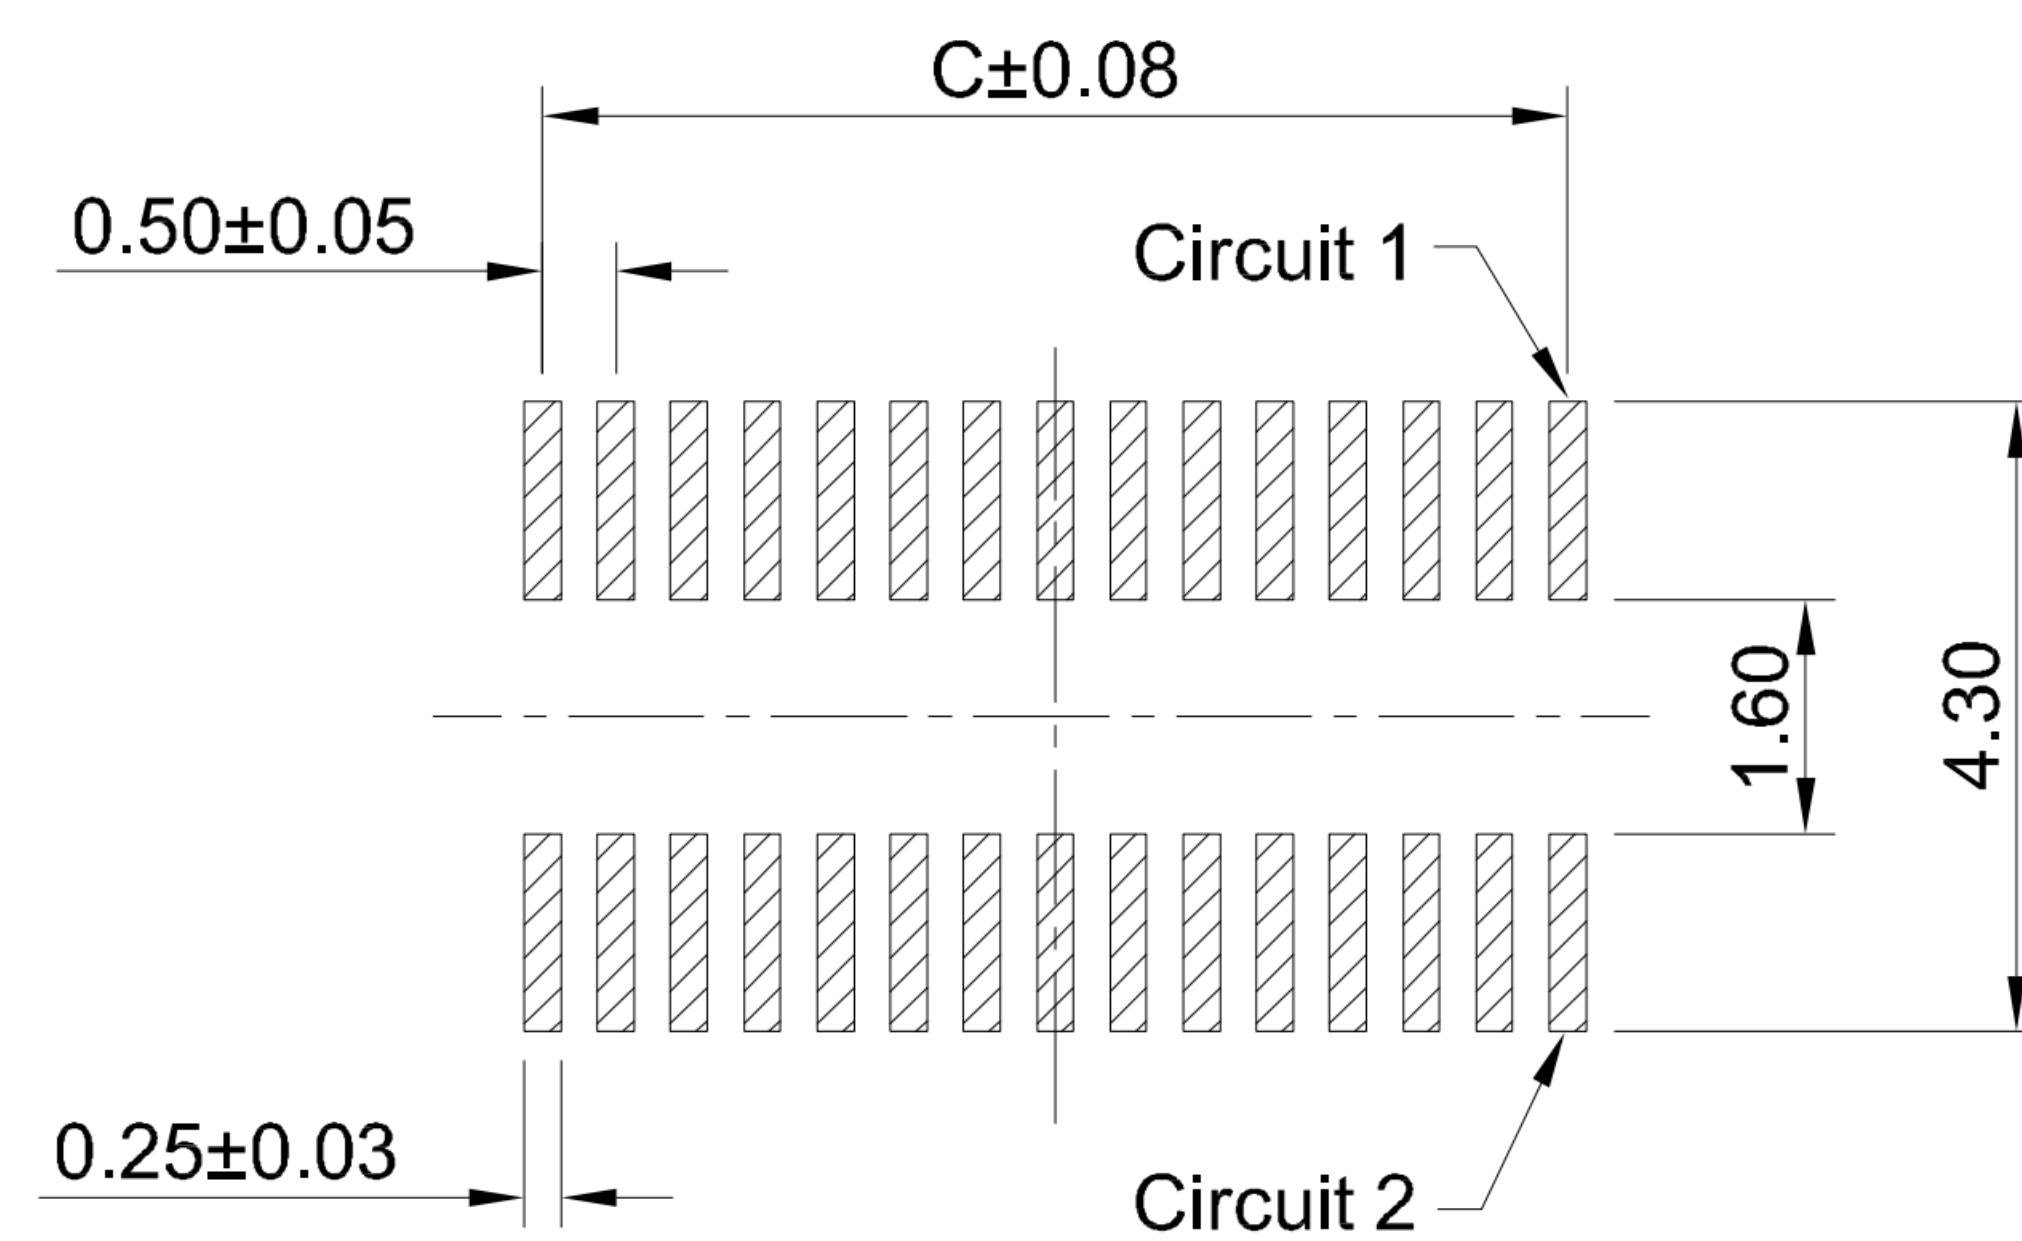
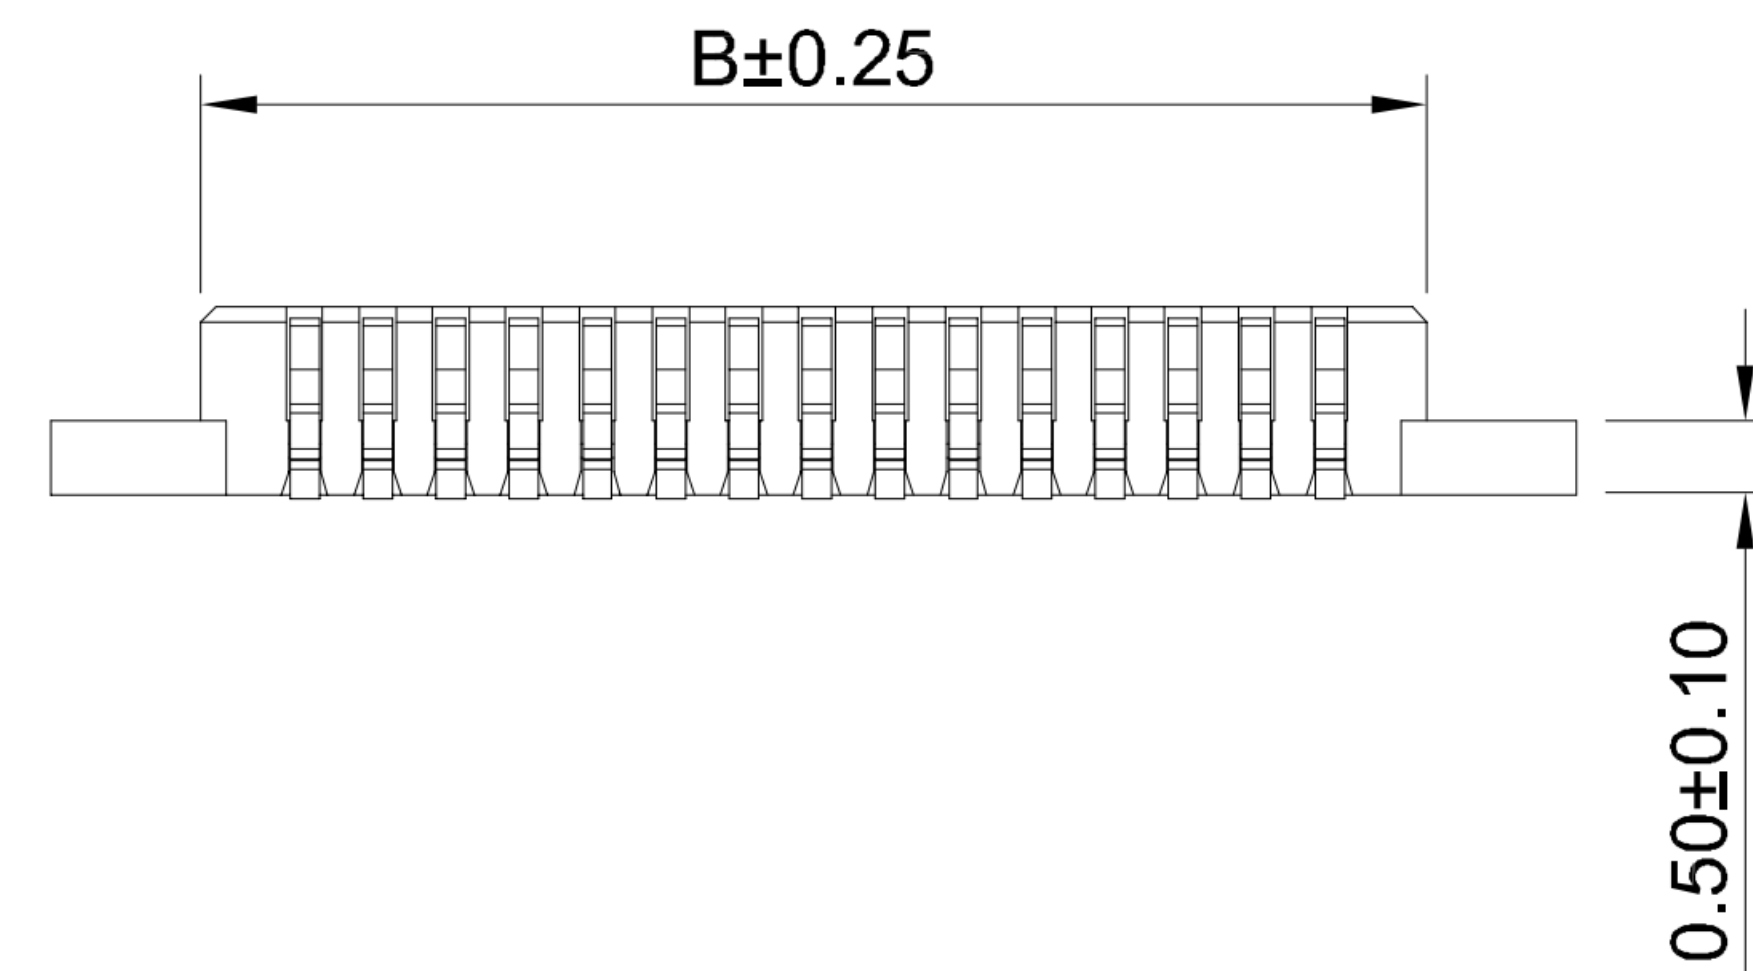
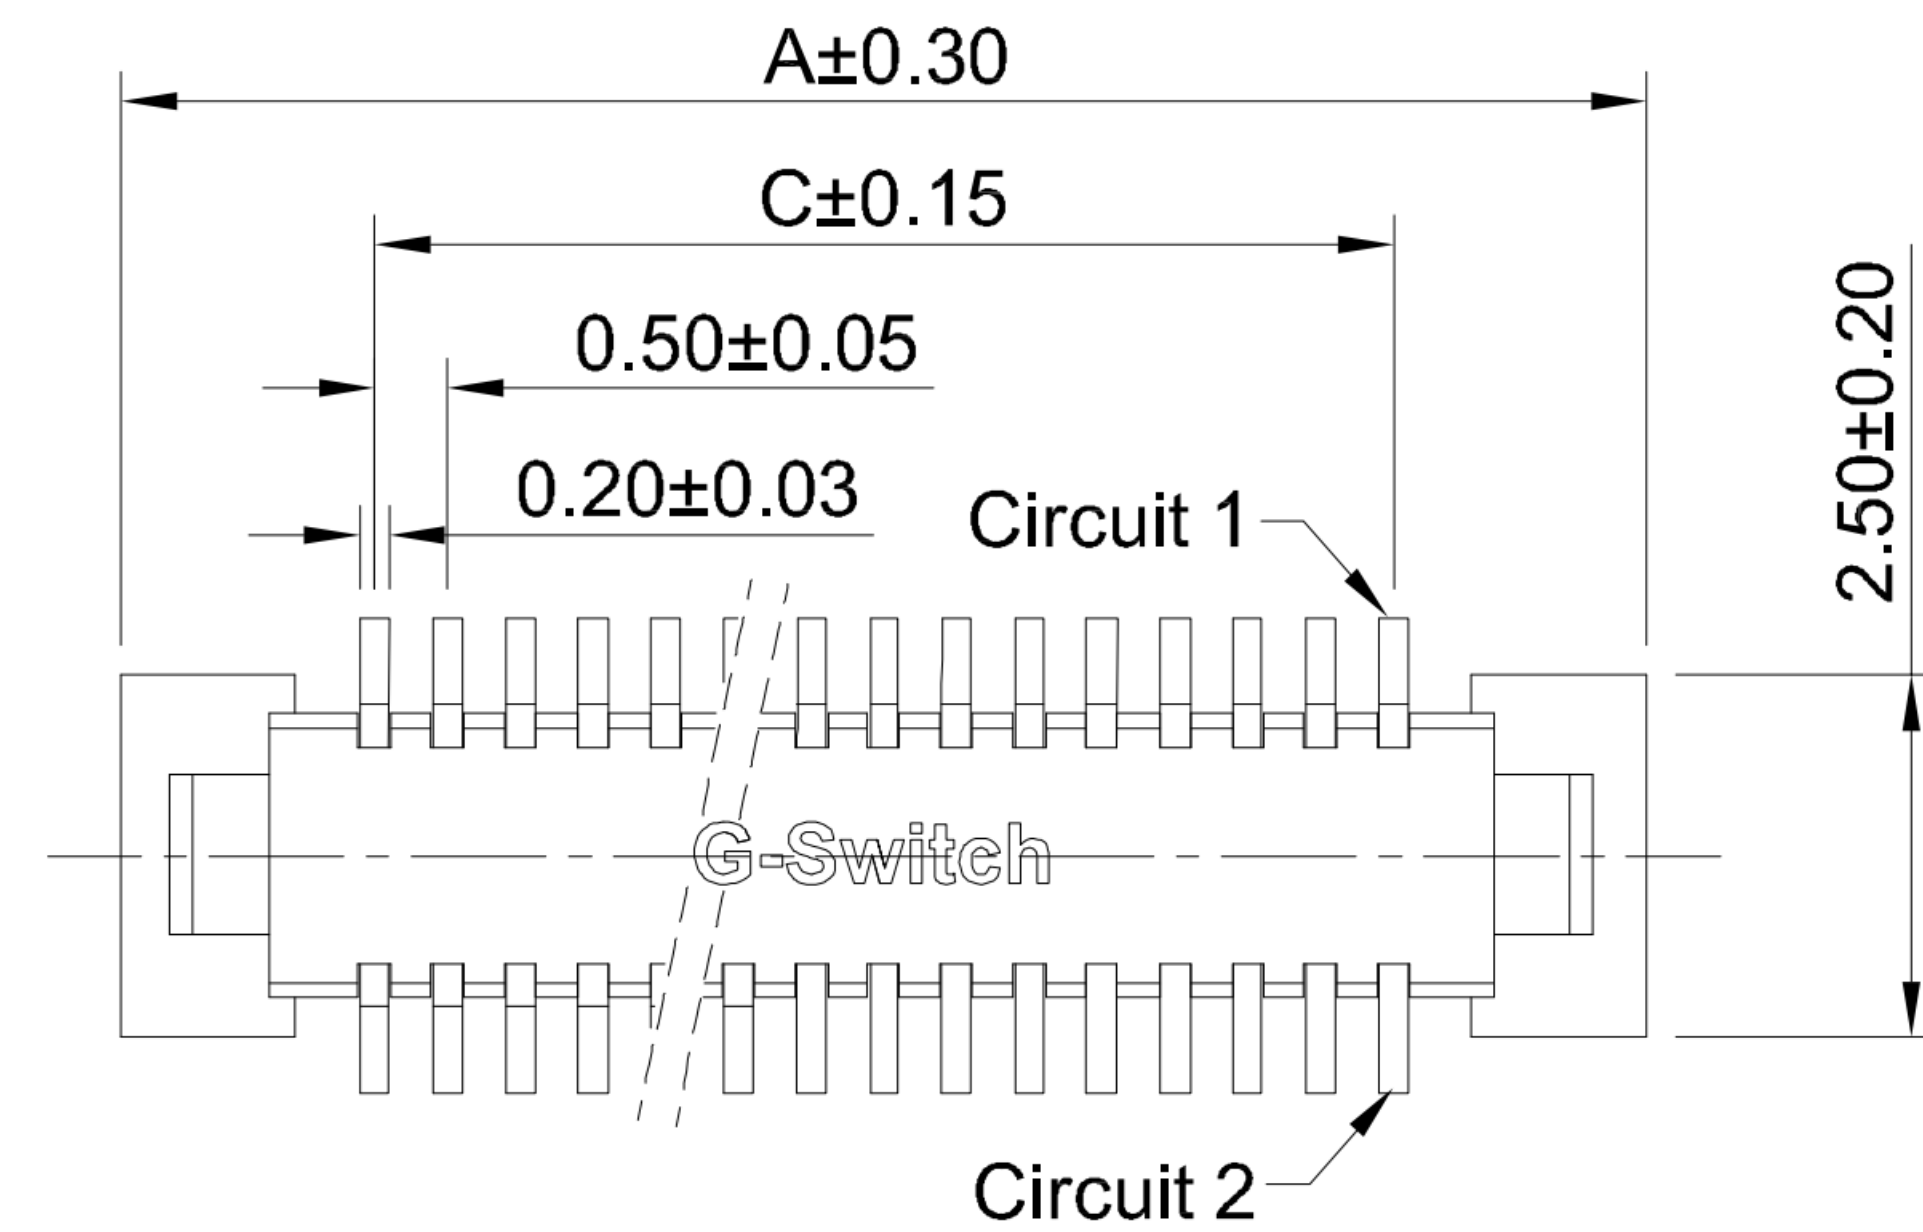
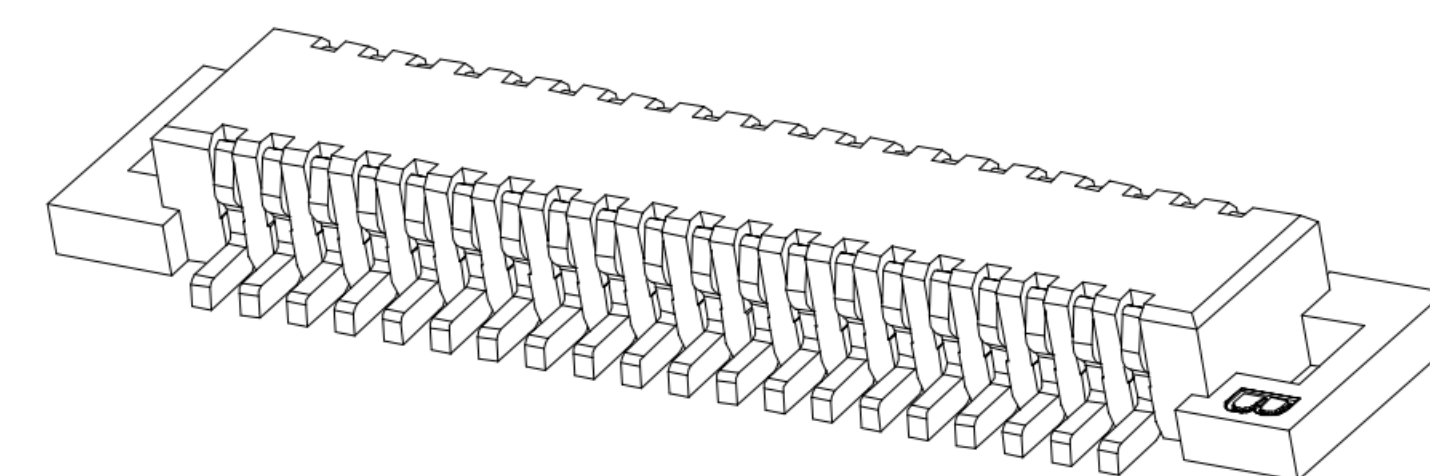


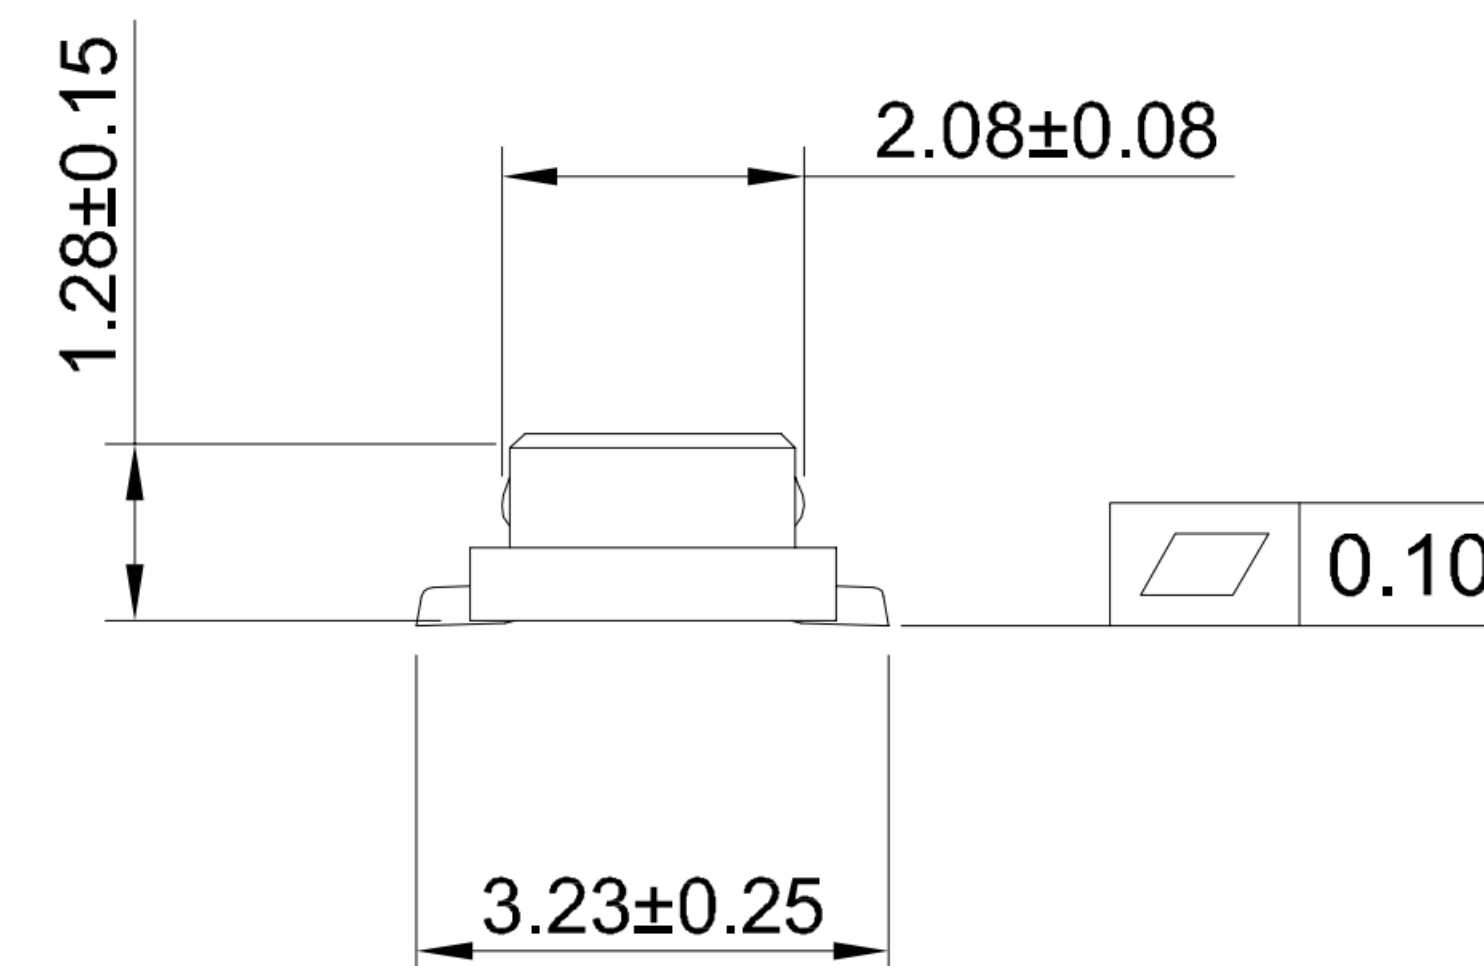

RECOMMEND PCB LAYOUT
TOLERANCE:±0.05

2	CONTACT	PHOSPHOR BRONZE	ALL G/F
1	HOUSING	LCP,94V-0	NATURE
NO.	PART NAME	MATERIAL	REMARK

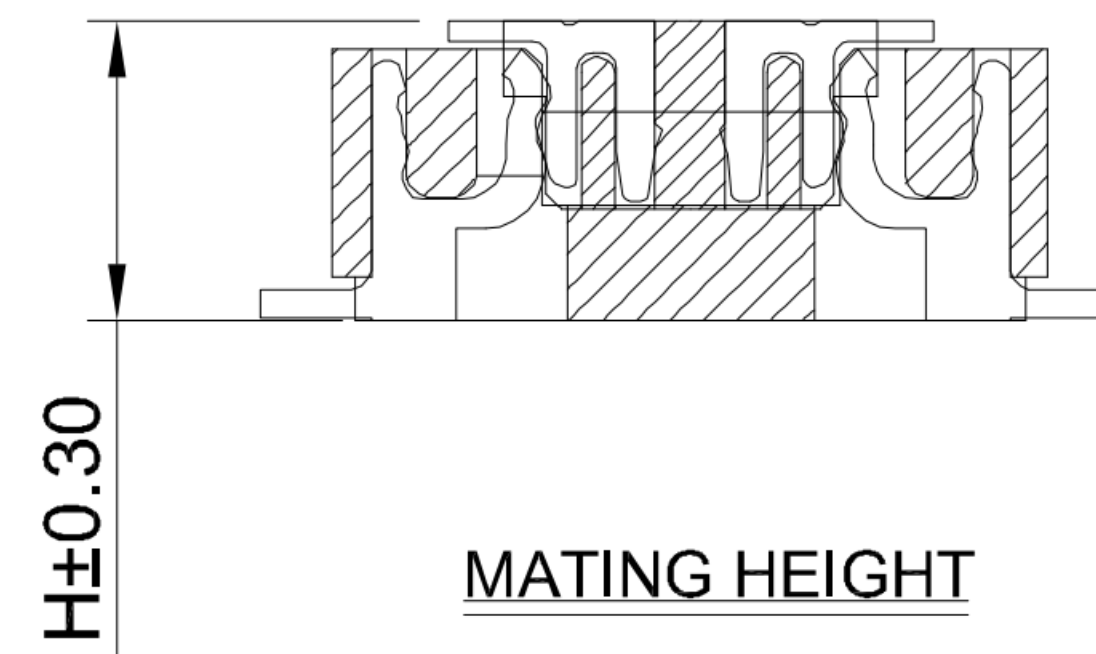


MATING HEIGHT	PLUG (H.mm)	SOCKET (H.mm)
1.5	1.28	1.35
2.0	1.28	1.85
2.5	1.28	2.35



G-Switch Specification:

- 1.Current rated: 0.5A AC/DC
- 2.Voltage rating: 50V AC/DC
- 3.Withstanding voltage: 500V AC
- 4.Contact resistance: 40mΩ Max.
- 5.Insulation resistance: 500MΩ min
- 6.Durability cycle: 50Cycles
- 7.Removal force: 0.12kgf/Pin min
- 8.Operating temperature range: -40℃ ~ +105℃

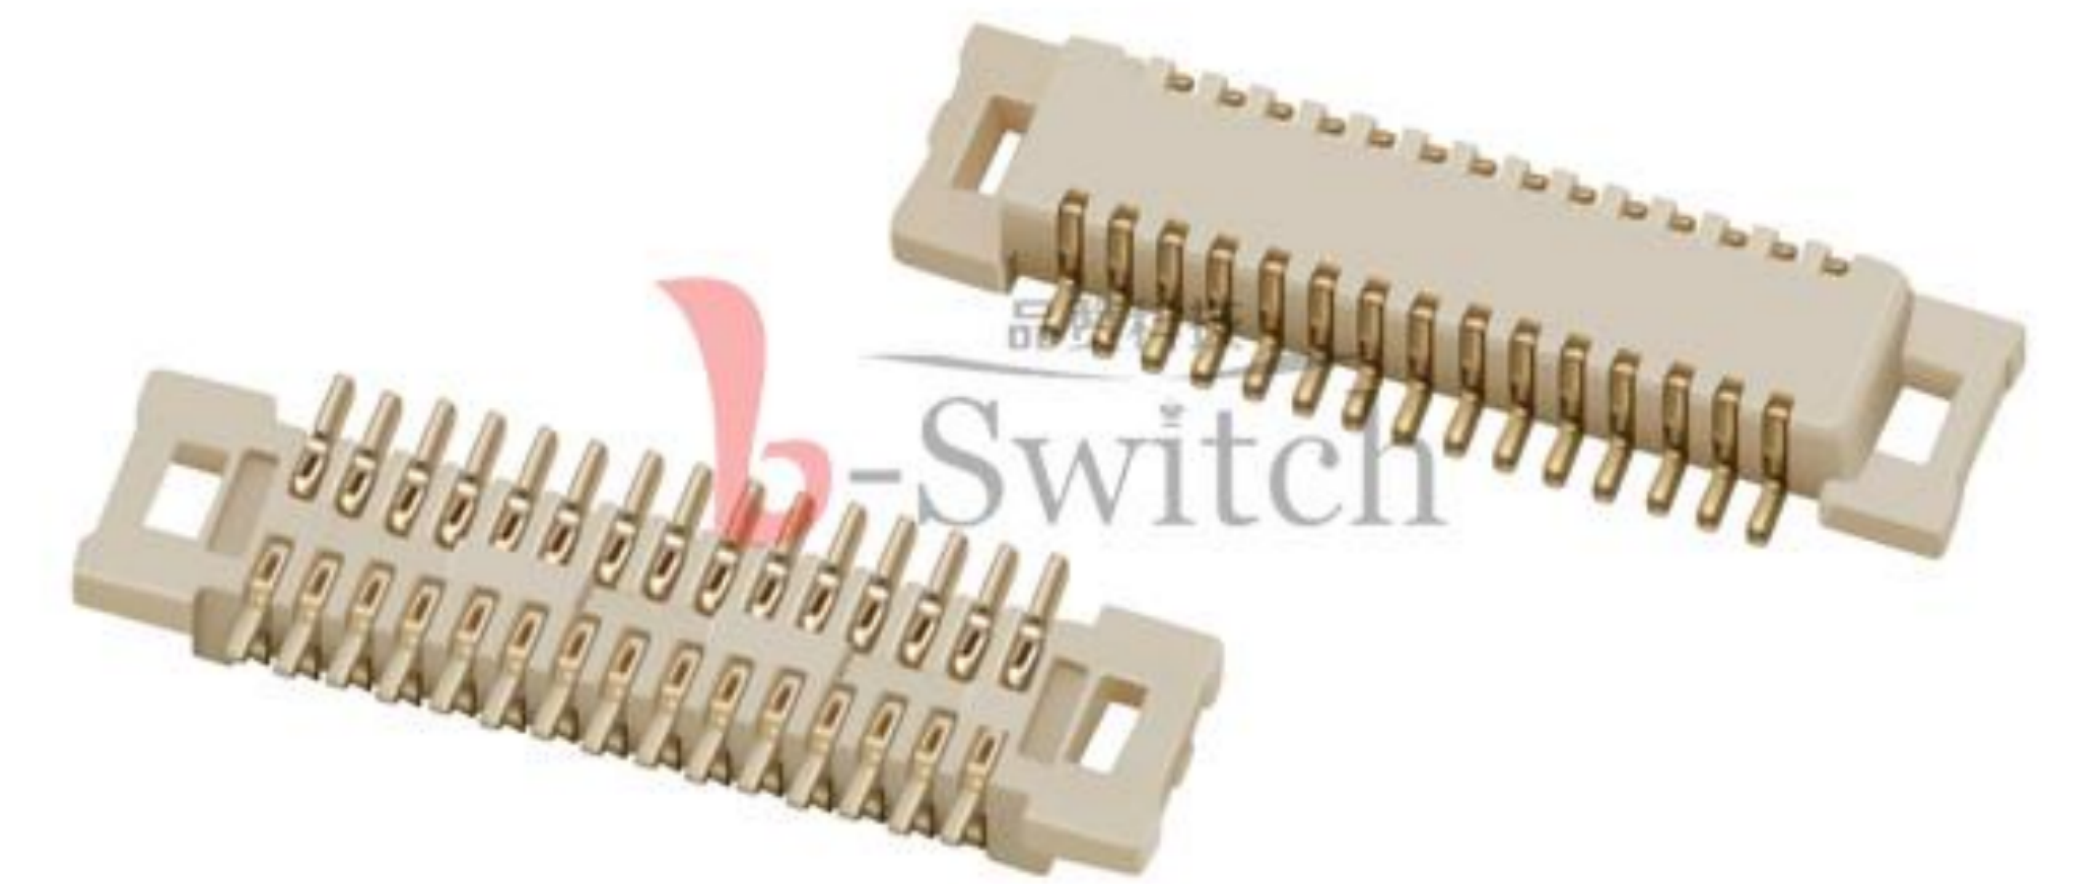

GT-B0504 M S V 12 -XX X XX 01

G-Switch

Series No

M-Male

Termipoint
S-SMT

Angle
V-180°

Terminal Plating

Housing Colour
S-Nature

Pin Q' PY
10~80

Height
12-1.28mm

Ordering Information:

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
10	5.50	3.40	2.00	46	14.50	12.40	11.00
12	6.00	3.90	2.50	48	15.00	12.90	11.50
14	6.50	4.40	3.00	50	15.50	13.40	12.00
16	7.00	4.90	3.50	52	16.00	13.90	12.50
18	7.50	5.40	4.00	54	16.50	14.40	13.00
20	8.00	5.90	4.50	56	17.00	14.90	13.50
22	8.50	6.40	5.00	58	17.50	15.40	14.00
24	9.00	6.90	5.50	60	18.00	15.90	14.50
26	9.50	7.40	6.00	62	18.50	16.40	15.00
28	10.00	7.90	6.50	64	19.00	16.90	15.50
30	10.50	8.40	7.00	66	19.50	17.40	16.00
32	11.00	8.90	7.50	68	20.00	17.90	16.50
34	11.50	9.40	8.00	70	20.50	18.40	17.00
36	12.00	9.90	8.50	72	21.00	18.90	17.50
38	12.50	10.40	9.00	74	21.50	19.40	18.00
40	13.00	10.90	9.50	76	22.00	19.90	18.50
42	13.50	11.40	10.00	78	22.50	20.40	19.00
44	14.00	11.90	10.50	80	23.00	20.90	19.50

SCALE: 1:1	UNIT: mm
SIZE: A4	

Unless otherwise
General Tolerance:

X	±0.40
X.x	±0.30
X.xx	±0.20
X°	±5°
X.X°	±3°

Title: BTB 0.50mm Pitch 180° Dual Rows
SMT Type Mate Connector

Molde Code: GT-B0504MSV12-XXXXX01

DRAWN	CHECKED	APPROVED	DATE
Hu	Chen	Chen	2022.12.28



REV: A0	SHEET: 1/1
---------	------------