


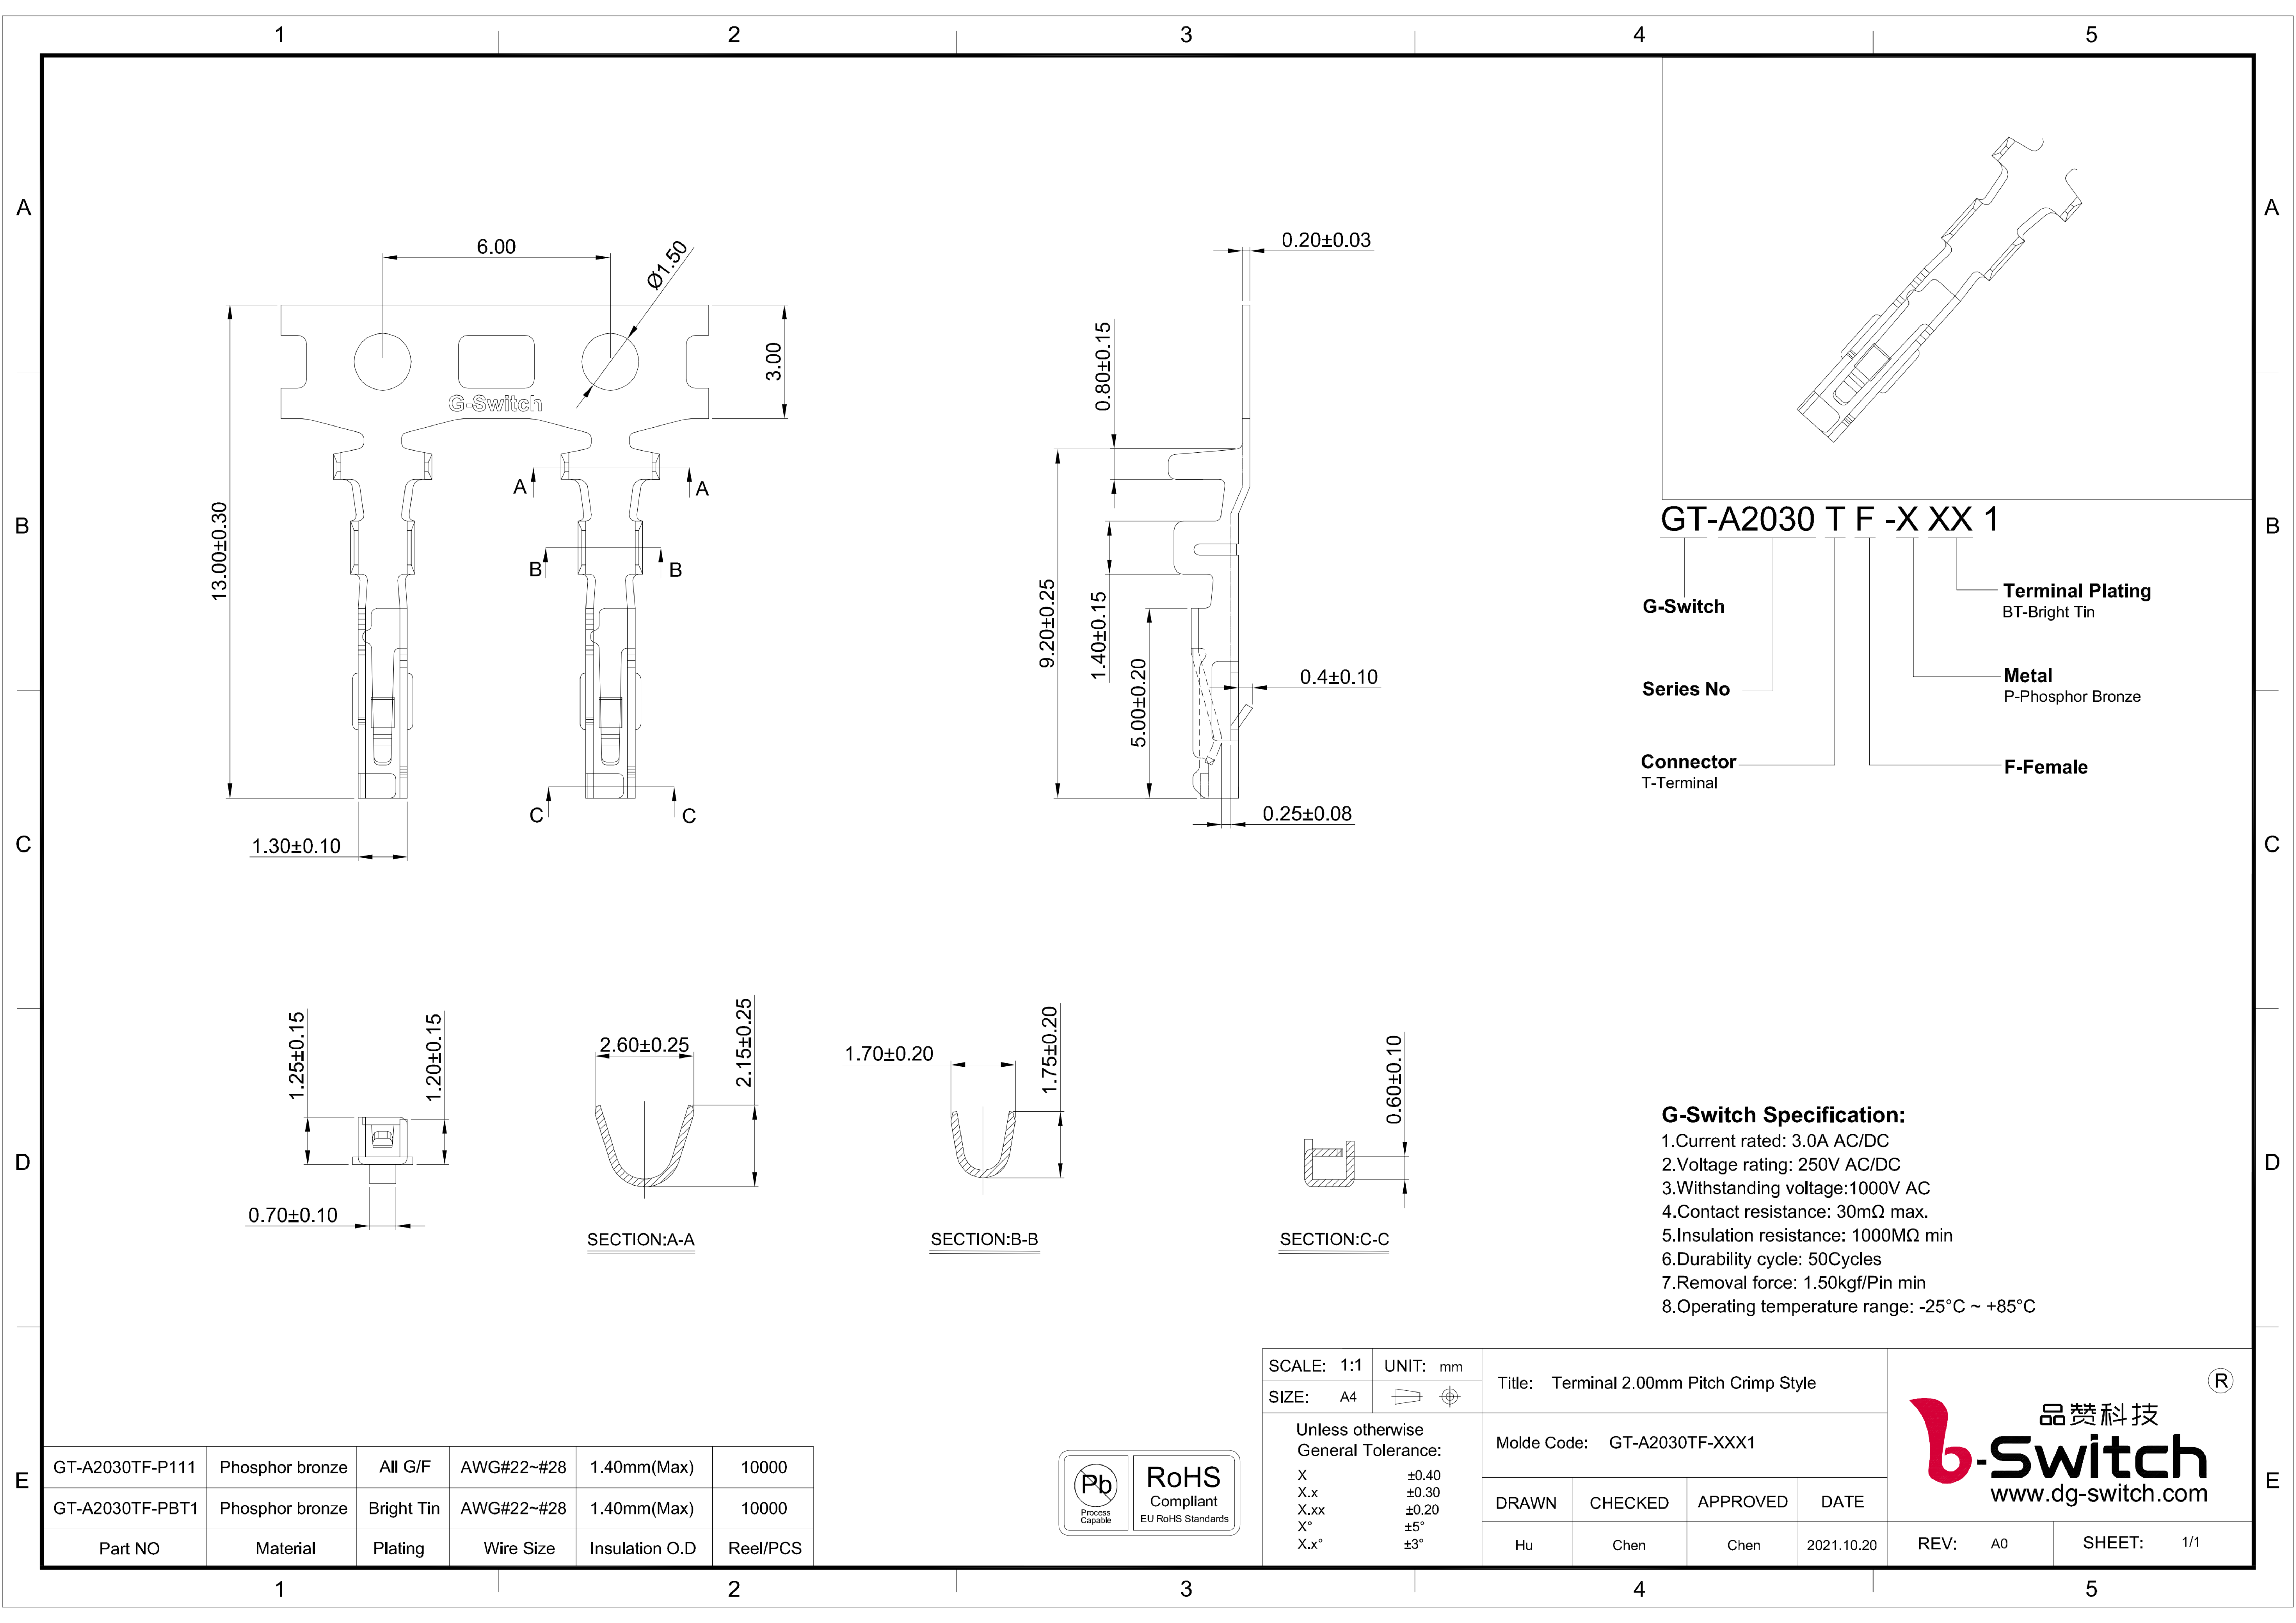

GT-A2030 T F -X XX 1


G-Switch
Series No
Connector
T-Terminal
Terminal Plating
BT-Bright Tin
Metal
P-Phosphor Bronze
F-Female

G-Switch Specification:

- 1.Current rated: 3.0A AC/DC
- 2.Voltage rating: 250V AC/DC
- 3.Withstanding voltage:1000V AC
- 4.Contact resistance: 30mΩ max.
- 5.Insulation resistance: 1000MΩ min
- 6.Durability cycle: 50Cycles
- 7.Removal force: 1.50kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

GT-A2030TF-P111	Phosphor bronze	All G/F	AWG#22~#28	1.40mm(Max)	10000
GT-A2030TF-PBT1	Phosphor bronze	Bright Tin	AWG#22~#28	1.40mm(Max)	10000
Part NO	Material	Plating	Wire Size	Insulation O.D	Reel/PCS



SCALE: 1:1	UNIT: mm	Title: Terminal 2.00mm Pitch Crimp Style				 品赞科技 www.dg-switch.com	
SIZE: A4		Molde Code: GT-A2030TF-XXX1					
Unless otherwise General Tolerance: X ±0.40 X.x ±0.30 X.xx ±0.20 X° ±5° X.x° ±3°		DRAWN	CHECKED	APPROVED	DATE		
		Hu	Chen	Chen	2021.10.20	REV: A0	SHEET: 1/1