
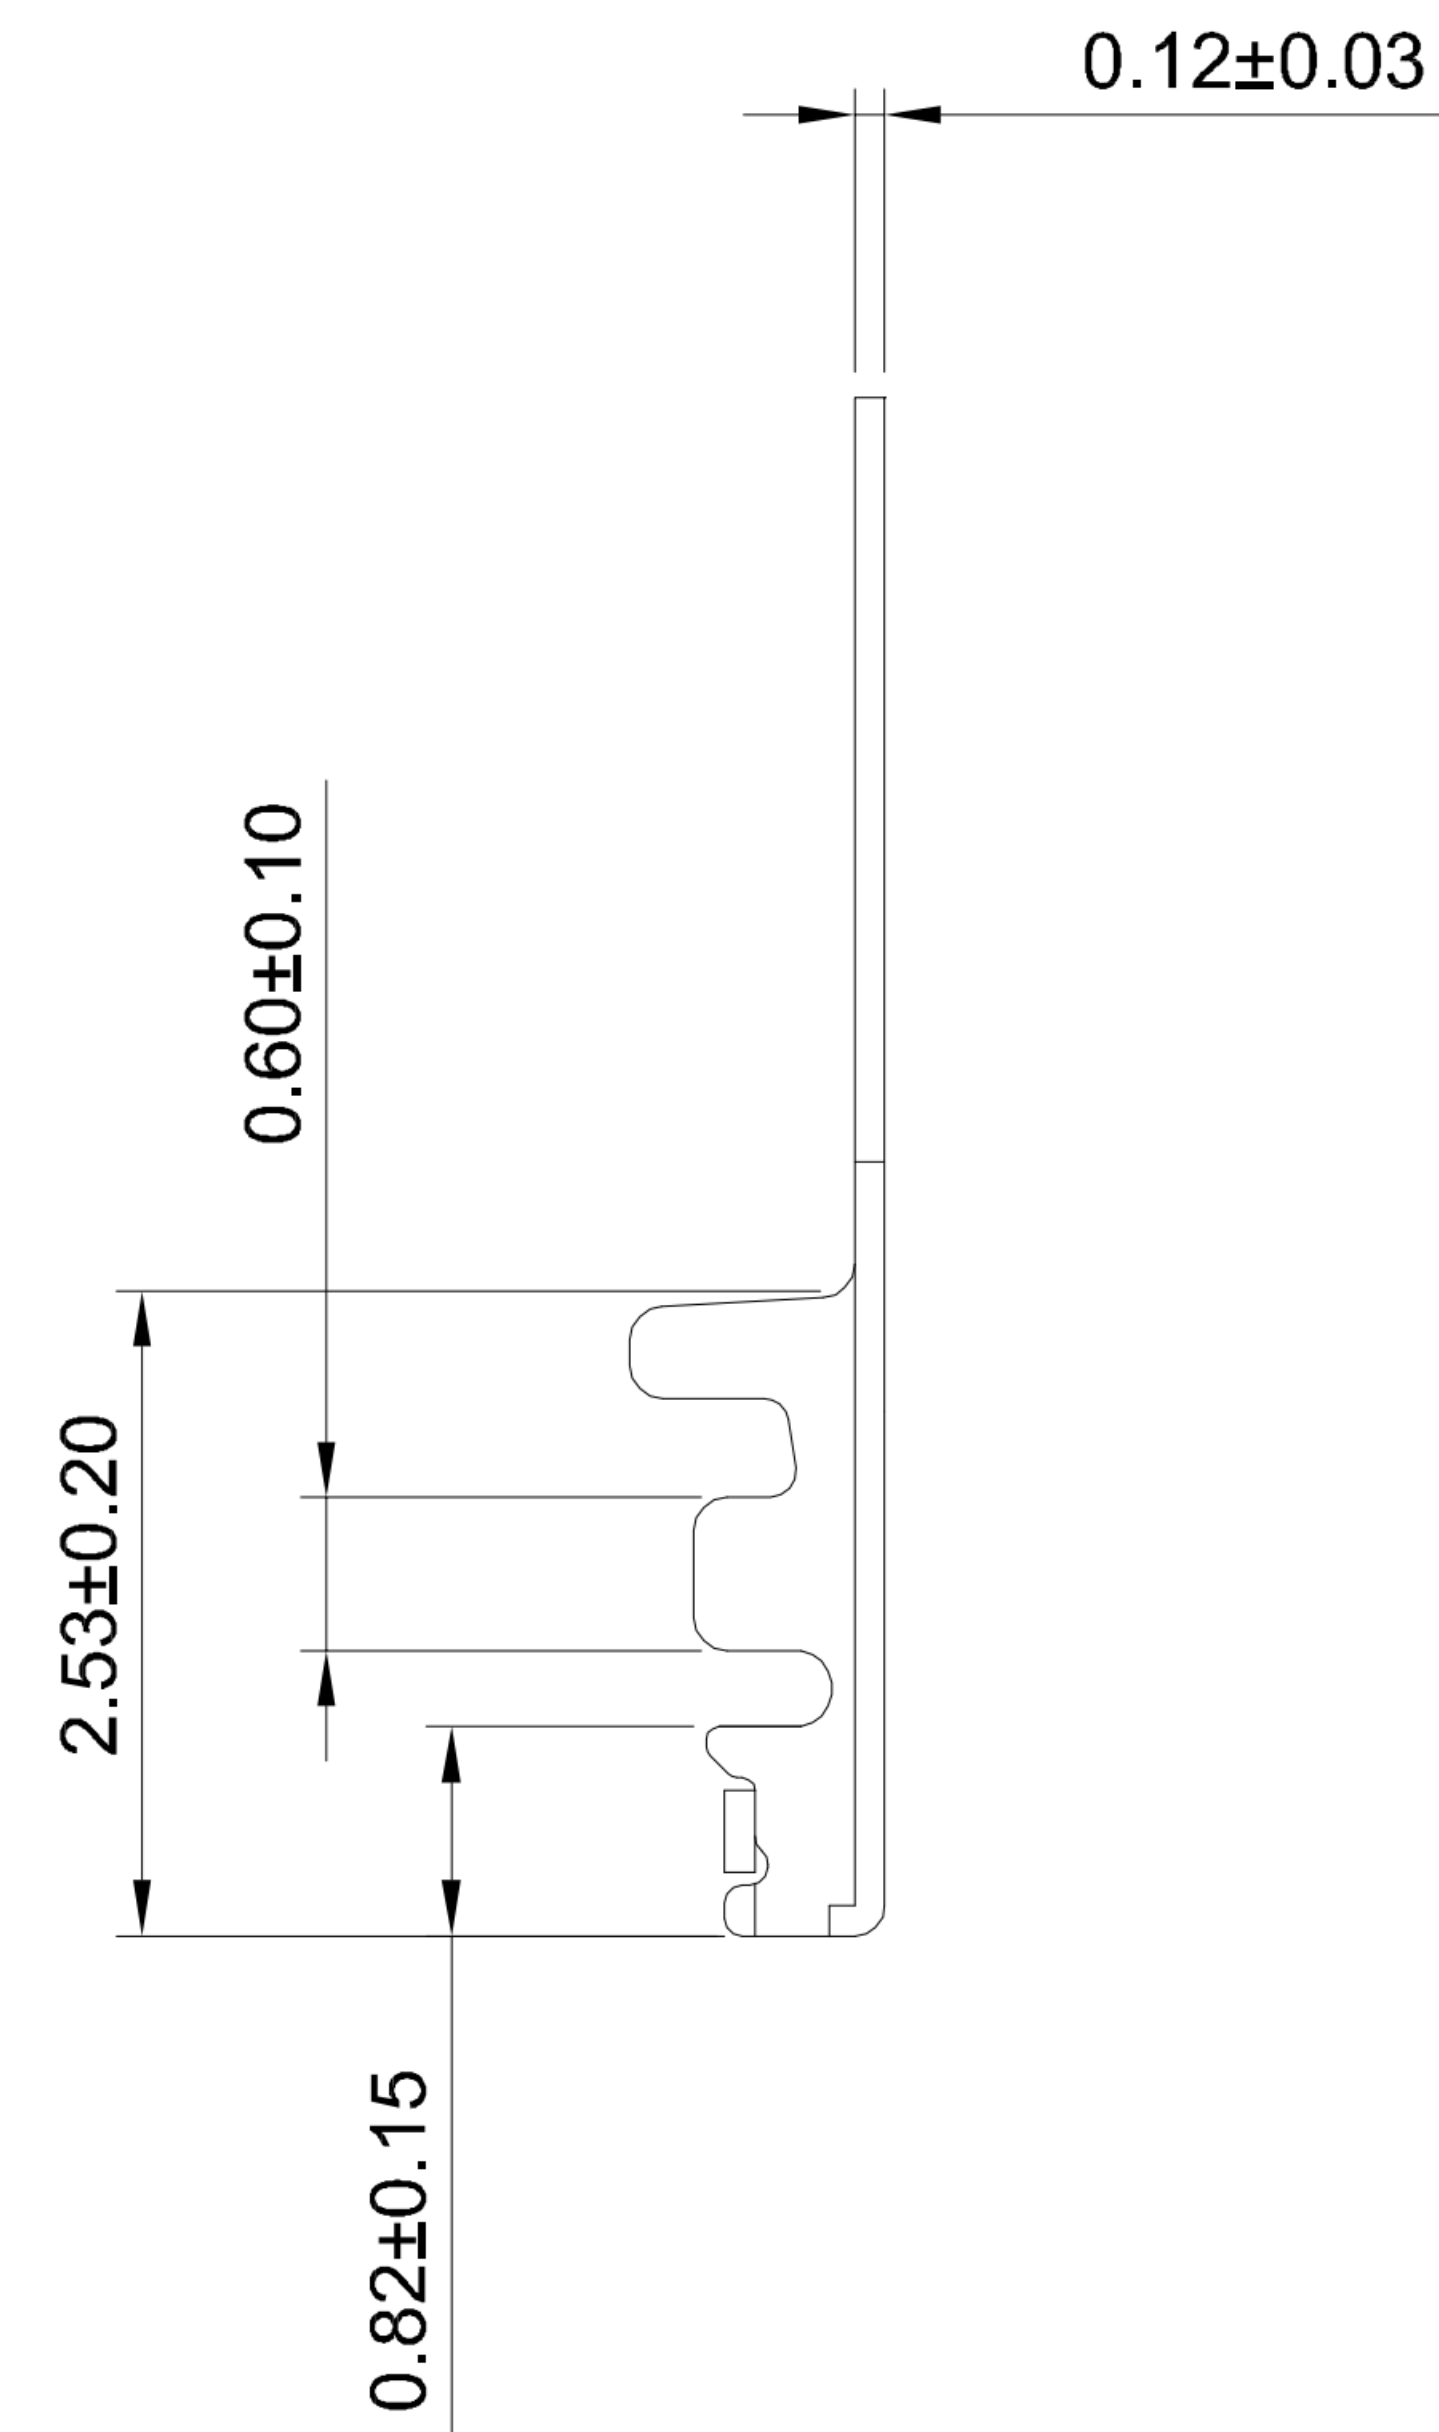
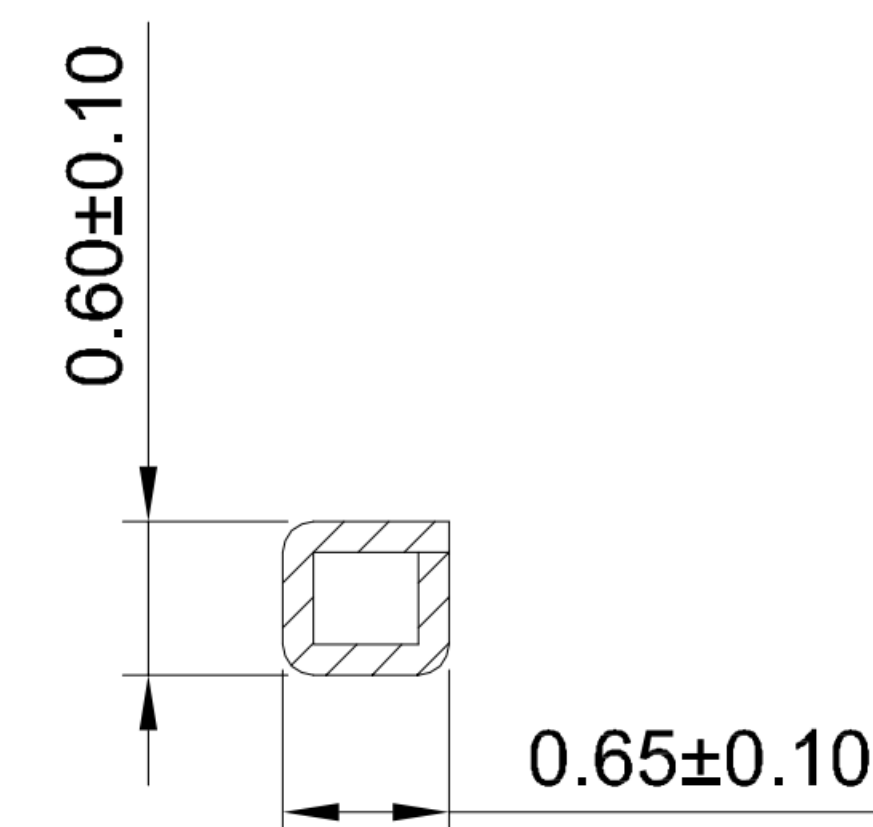


— **F-Female**



SECTION:C-C

- 1.Current rated: 0.8-2.5A AC/DC
- 2.Voltage rating: 100V AC/DC
- 3.Withstanding voltage: 300V AC
- 4.Contact resistance: 20mΩ max.
- 5.Insulation resistance: 100MΩ min
- 6.Durability cycle: 50Cycles
- 7.Removal force: 1.0kgf/Pin min
- 8.Operating temperature range: -40℃ ~ +85℃

SCALE: 1:1	UNIT: mm	品赞科技 b-Switch www.dg-switch.com ®			
SIZE: A4					
Unless otherwise General Tolerance:		Molde Code: GT-A0801TF-XXX1			
X ±0.40 X.x ±0.30 X.xx ±0.20 X° ±5° X.x° ±3°		DRAWN	CHECKED	APPROVED	DATE
		Hu	Hu	Chen	2021.10.20
		REV: A0		SHEET: 1/1	

