

A

B

C

D

E




A

B

C

D

E

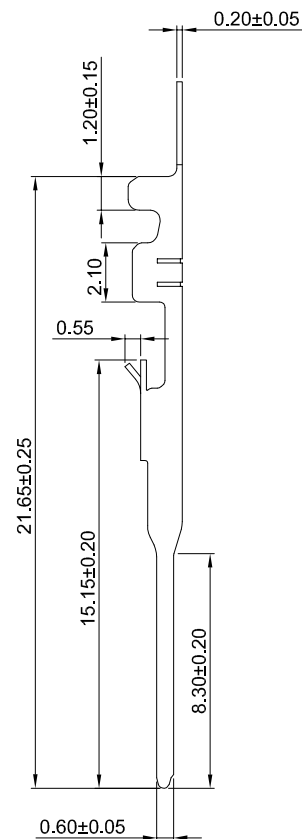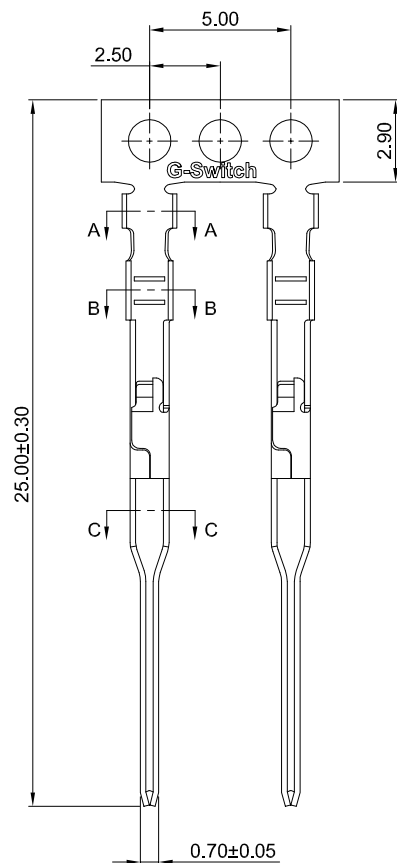


GT-A2547 T M -X XX 1

G-Switch


Series No

Connector
T-TerminalTerminal Plating
BT-Bright Tin
01-G/FMetal
P-Phosphor Bronze


F-Female



SECTION:A-A



SECTION:B-B



SECTION:C-C

G-Switch Specification:

- 1.Current rated: 3.0A AC/DC
- 2.Voltage rating: 250V AC/DC
- 3.Withstanding voltage: 1500V AC
- 4.Contact resistance: 20mΩ max.
- 5.Insulation resistance: 1000MΩ min
- 6.Durability cycle: 50Cycles
- 7.Removal force: 1.5kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

GT-A2547TM-PBT1	Phosphor bronze	Bright Tin	AWG#22~#26	1.90mm(max)	15000
Part NO	Material	Plating	Wire Size	Insulation O.D	Reel/PCS

SCALE: 1:1 UNIT: mm
SIZE: A4Unless otherwise
General Tolerance:
X ±0.40
X.x ±0.30
X.xx ±0.20
X* ±5°
X.x° ±3°

Title: Terminal 2.54mm Pitch Crimp Style

Molde Code: GT-A2547TM-XXX1

DRAWN	CHECKED	APPROVED	DATE
Hu	Chen	Chen	2022.12.28

品赞科技
b-Switch
www.dg-switch.com

REV: A0 SHEET: 1/1