


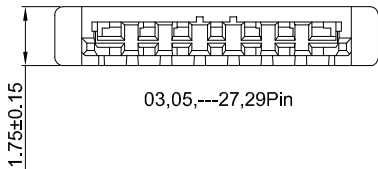







1. Current rated: 1.0A AC/DC
2. Voltage rating: 50V AC/DC
3. Withstanding voltage: 500V AC
4. Contact resistance: 20mΩ max.
5. Insulation resistance: 100MΩ min
6. Durability cycle: 30Cycles
7. Removal force: 0.30kgf/Pin min
8. Operating temperature range: -25°C ~ +85°C



GT-A1006 H M -1 XX X 01

G-Switch
Series No
Connector
H-Housing
M-Male

Housing Colour
W-White RoHS+HF
Pin Q' PY
02~30
Row NO
1-Single Row

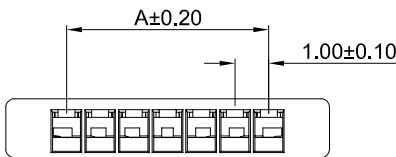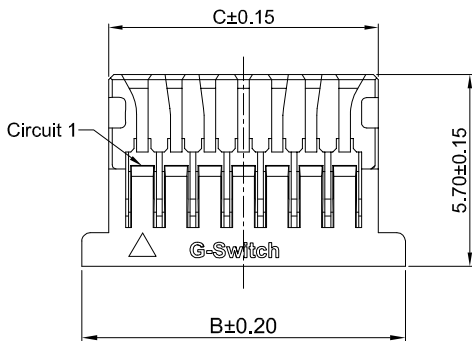

Ordering Information:

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
02	--	4.60	3.00	12	11.00	14.60	13.00
03	2.00	5.60	4.00	13	12.00	15.60	14.00
04	3.00	6.60	5.00	14	13.00	16.60	15.00
05	4.00	7.60	6.00	15	14.00	17.60	16.00
06	5.00	8.60	7.00	16	15.00	18.60	17.00
07	6.00	9.60	8.00	20	19.00	22.60	21.00
08	7.00	10.60	9.00	22	21.00	24.60	23.00
09	8.00	11.60	10.00	26	25.00	28.60	27.00
10	9.00	12.60	11.00	30	29.00	32.60	31.00
11	10.00	13.60	12.00	--	--	--	--

SCALE: 1:1	UNIT: mm	Title: Housing 1.00mm Pitch SHL Single Row Male			
SIZE: A4					
Unless otherwise General Tolerance: X ±0.40 X.x ±0.30 X.xx ±0.20 X* ±5° X.x* ±3°		Molde Code: GT-A1006HM-1XXX01			
		DRAWN	CHECKED	APPROVED	DATE
		Hu	Hu	Chen	2021.10.20



HOUSING	PA66,94V-0	WHITE
PART NAME	MATERIAL	REMARK

