


P.C.B LAND DIMENSION

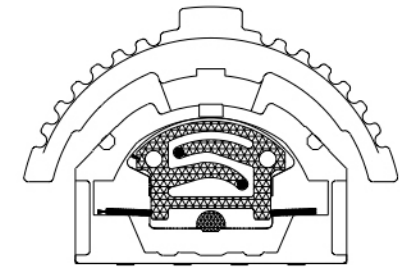



GT-TC002X-HXXX-LX

G-SWITCH

Switch Height (mm)
H089=8.9mm

Operating Force
A=Lever portion 80±50gf
Push portion 200±100gf


Switch lifetime (Force)
L1=100,000 Cycles



CODE TABLE (■ = ON)


ANGLE	20°	15°	0°	15°	20°
①	■				
②					■
③	■				■

CCW ← → CW



G-Switch Specification:

Operating temperature range : -30°C to +85°C
 Rating : 50mA, 12V DC
 Insulation resistance : 100MΩ min. 100V DC
 Dielectric strength : 250V AC for 1 min
 Contact resistance : 100m Ω max.
 Travel: 4-direction -25° -0° ±25°
 push portion 0.85±0.1mm



	G-Switch Electronic (HongKong) CO.,Ltd.		
	Unless otherwise specified, Tolerance: X. ±0.30 X.x ±0.20 X.xx ±0.15 X.xxx ±0.10 Angles ±3°	DESIGN FengFengChen CHECKED DATE APPROVED DATE	DATE 2019.05.29 Molde code: GT-TC002X-HXXX-LX
http://www.dg-switch.com TEL:0769-82388879	REV.: X1 SIZE: A4	SCALE: 4:1 SHEET: 1/1	UNIT: mm