

A

B

C

D

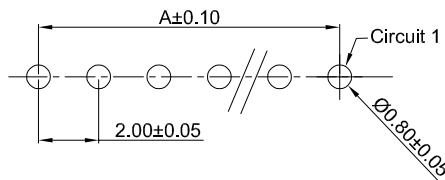
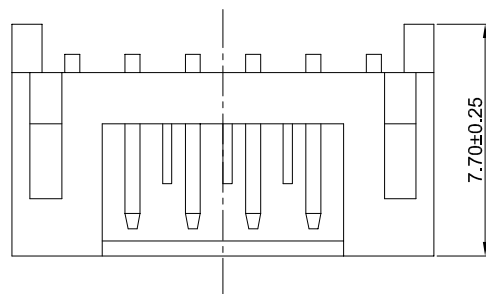
E

G-Switch Specification:

- 1.Current rated: 2.0A AC/DC
- 2.Voltage rating: 100V AC/DC
- 3.Withstanding voltage: 800V AC
- 4.Contact resistance: 10mΩ max.
- 5.Insulation resistance: 1000MΩ min
- 6.Durability cycle: 30Cycles
- 7.Removal force: 1.20kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

实物照片图

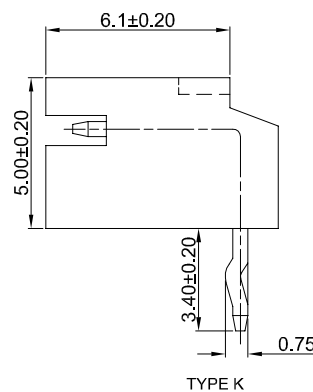
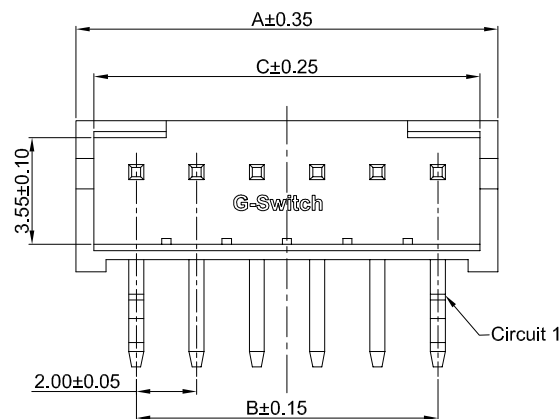
G-Switch

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05


GT-A2001 W R D -1 XX X XX 0X

G-Switch

Series No

Connector
W-WaferAngle
R-90°Termpoint
D-DIPType
01-Type A
02-Type KTerminal Plating
BT-Bright TinHousing Colour
W-WhitePin Q' PY
02~16Row NO
1-Single Row

TYPE K



TYPE A

Ordering Information:

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
02	6.10	—	5.00	10	22.10	18.00	21.00
03	8.10	4.00	7.00	11	24.10	20.00	23.00
04	10.10	6.00	9.00	12	26.10	22.00	25.00
05	12.10	8.00	11.00	13	28.10	24.00	27.00
06	14.10	10.00	13.00	14	30.10	26.00	29.00
07	16.10	12.00	15.00	15	32.10	28.00	31.00
08	18.10	14.00	17.00	16	34.10	30.00	33.00
09	20.10	16.00	19.00	--	--	--	--

2	PIN MATERIAL	BRASS	BRIGHT TIN
1	HOUSING	PA66,94V-0	WHITE
NO.	PART NAME	MATERIAL	REMARK



SCALE: 1:1 UNIT: mm

SIZE: A4

Unless otherwise
General Tolerance:

X ±0.40
X.x ±0.30
X.xx ±0.20
X° ±5°
X.x° ±3°

Title: Wafer 2.0mm Pitch 90° PH
DIP Type Connector

Molde Code: GT-A2001WRD-1XXXXX0X

DRAWN	CHECKED	APPROVED	DATE
Hu	Hu	Chen	2021.10.18

品赞科技®
www.dg-switch.com

REV: A0

SHEET: 1/1

A

B

C

D

E